



ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

CEILING PRODUCTS

COATINGS FOR STATEMENT CEILINGS



CemCote Skimmed Custom Colour

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

CEMCOTE

BRUSH OR SKIM-ON CEMENT COATING



CemCote Skimmed Dark Grey

A finely ground mixture of white Portland cement, pigments and chemicals. It is supplied in powder form requiring mixing with water on-site to produce a smooth, flowing coating which sets rock hard.

SUITABLE SURFACES

Interior & exterior plastered or previously painted walls.

FINISH

Slightly textured when applied with a brush.
Smooth when applied with a trowel.

THICKNESS

1.6 - 2.5mm.

APPLICATION

Brush-on or Putzmeister application:
Refer to CemCote Brushed datasheet.
Skim-on:
Refer to CemCote Skimmed datasheet.

CURING



Initial set - 1 hour. The completed work should be allowed to air cure for 24 hours after application, before mist spraying the entire wall from bottom to top (to prevent run marks) evenly at least twice during the day thereafter. The moisture in the substrate must be less than 5% prior to sealing.

PACKAGING

5 & 25kg containers.

COVERAGE

Brush-on or Putzmeister application: 2 - 5m² per kg/coat depending on suction and texture of the surface or 25 - 50m² per 25kg (2 coats).
Skim-on: 1 - 1.1kg's per m² or 25 - 30m² (2 coats) per 25kg container. Depending on surface texture and porosity.

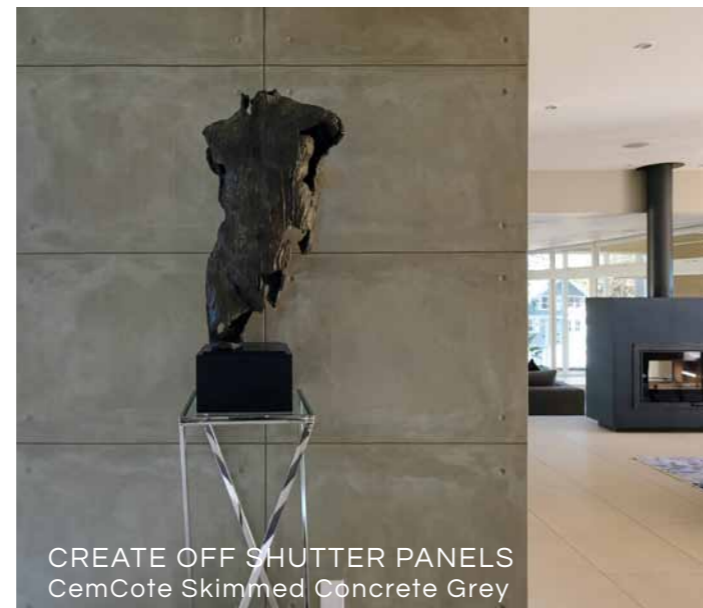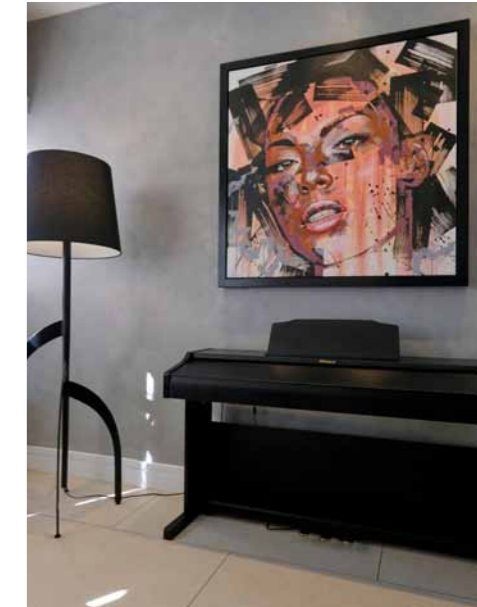













BENEFITS

- For interior & exterior use
- Brush-on or skim-on application
- Durable and weatherproof
- Interesting colour variation
- Wears well over time



HOLLOW CORE HARDBOARD DOOR
CemCote Skimmed Anthill Grey

CEILING
CemCote Brushed Dark Grey

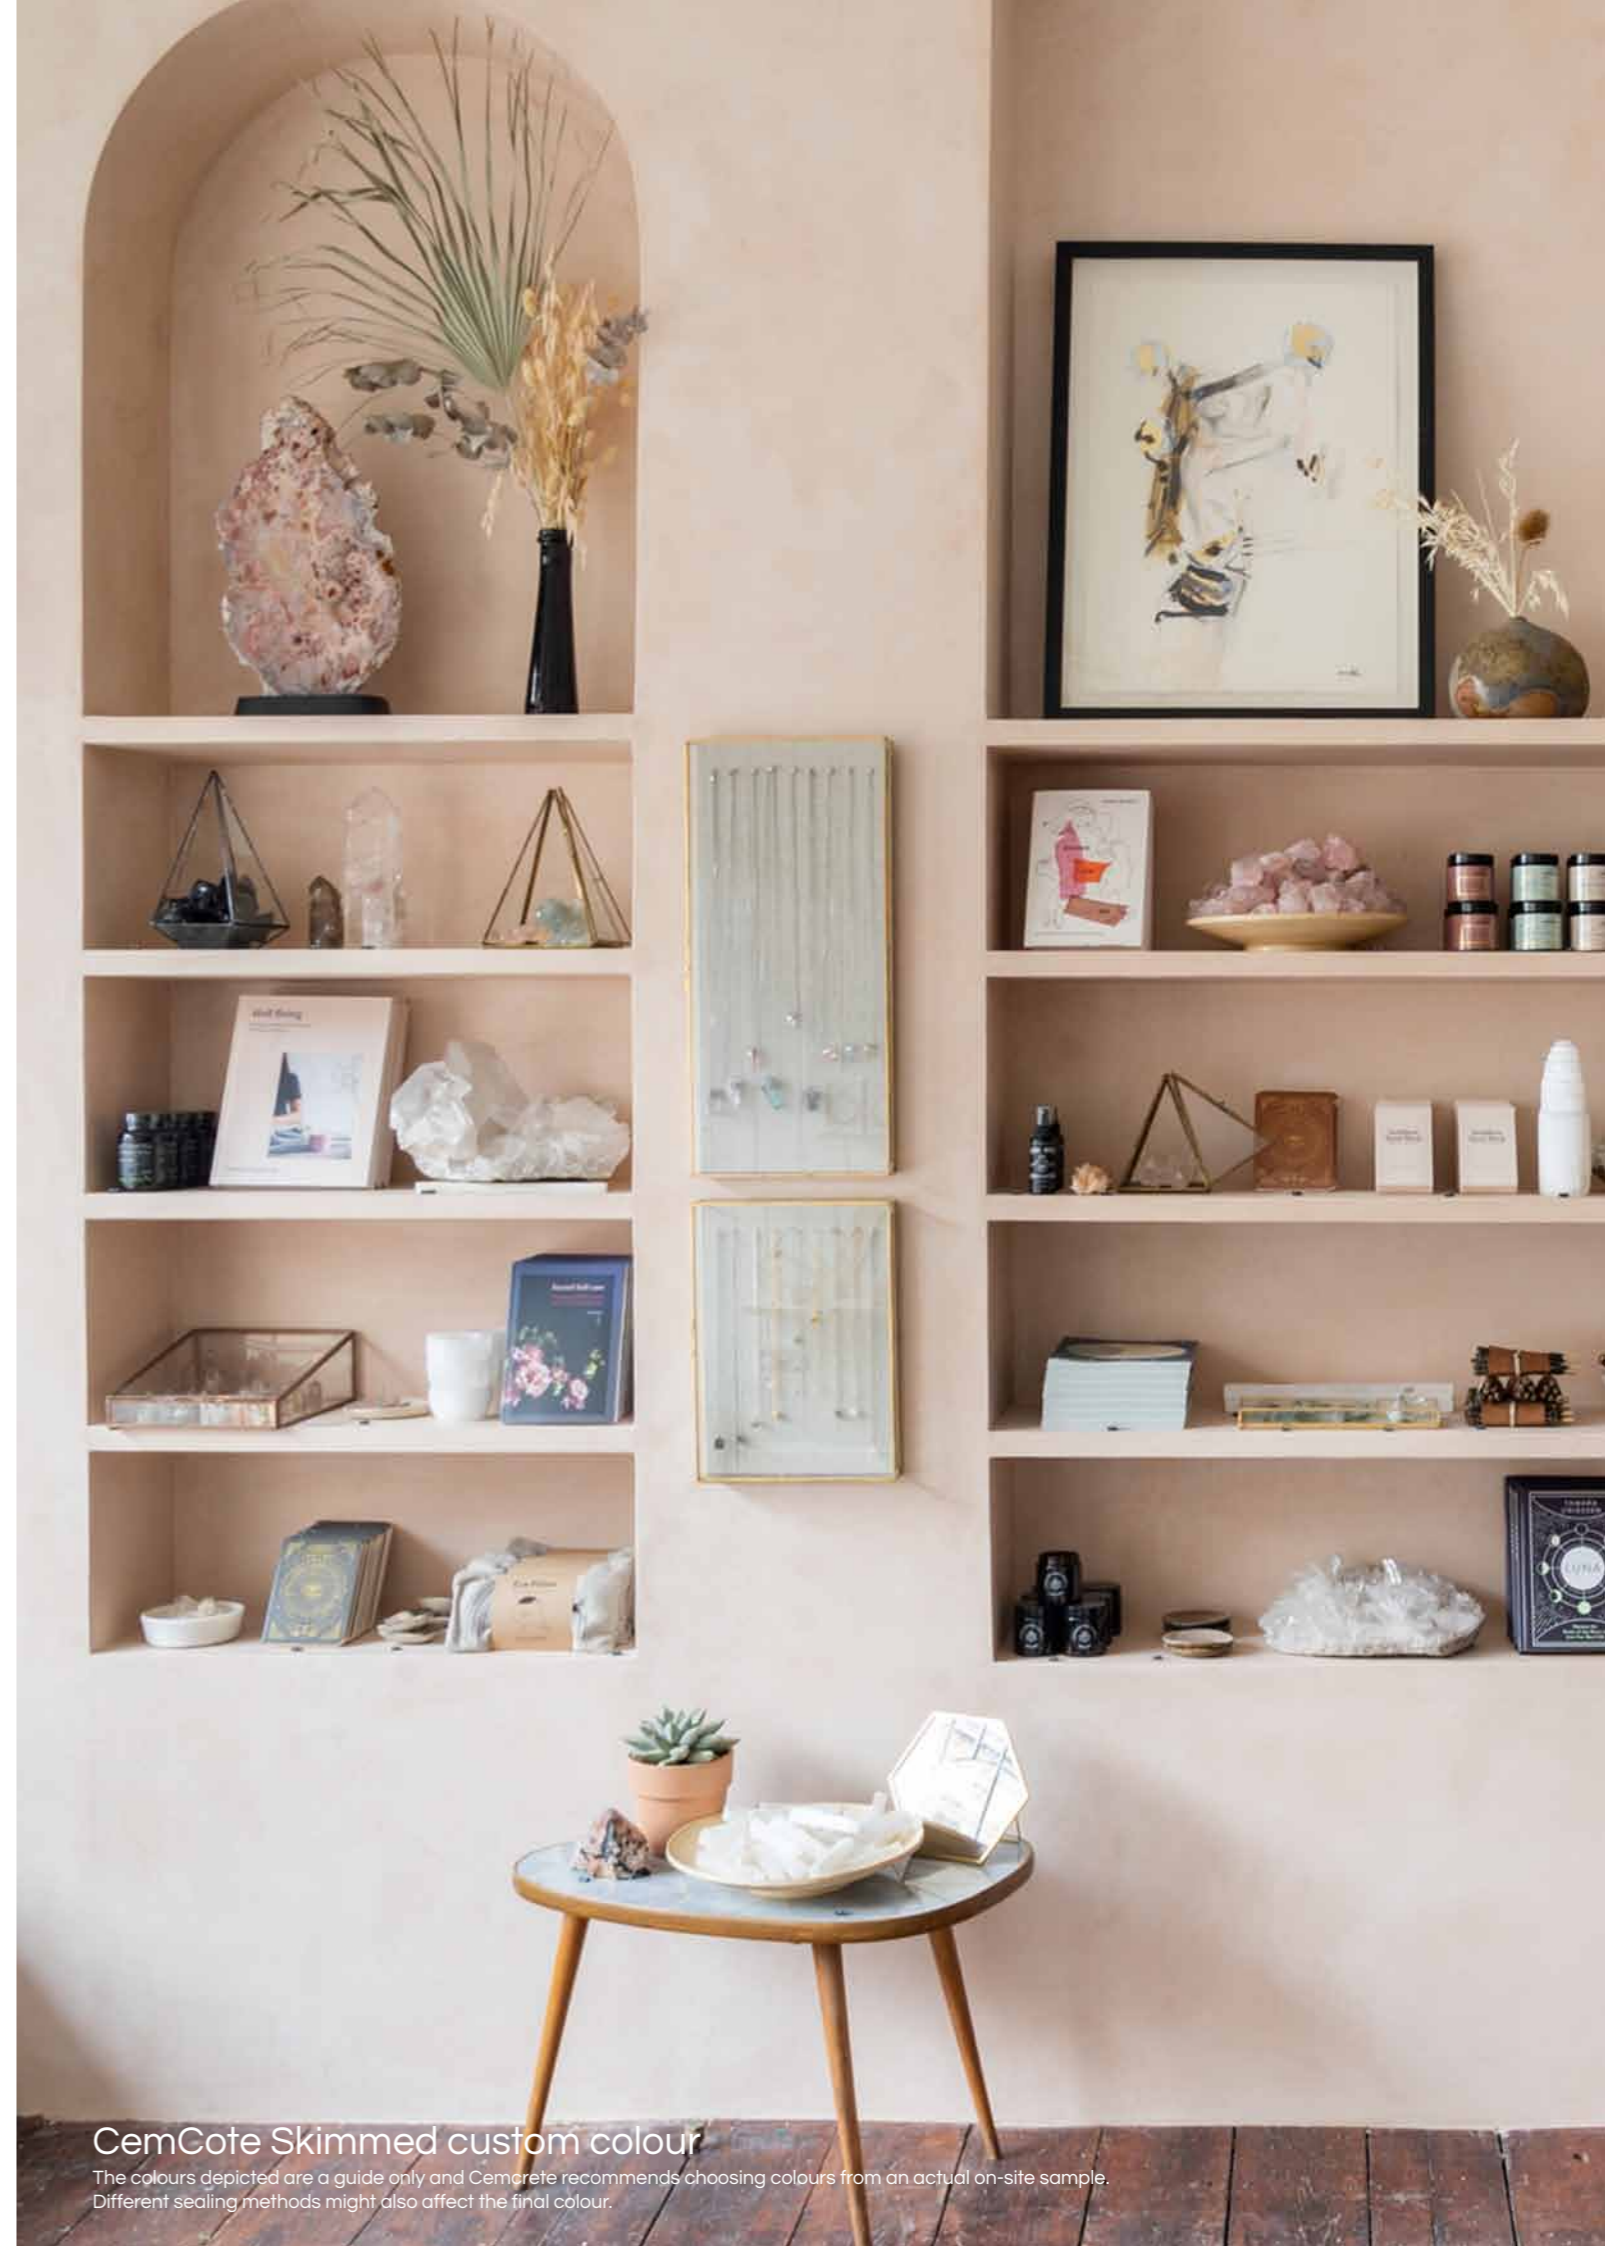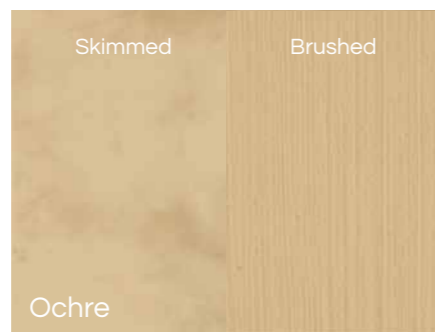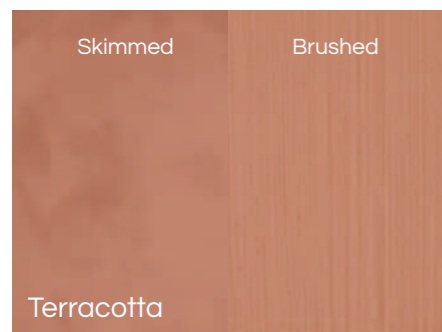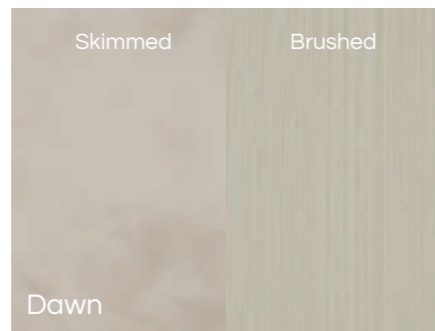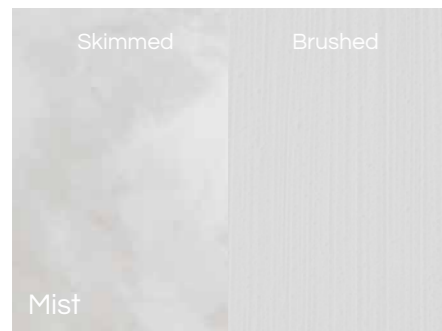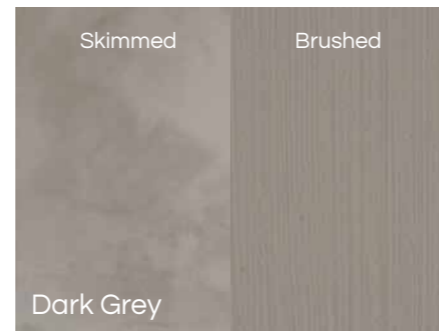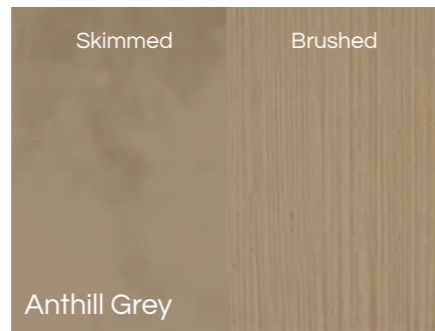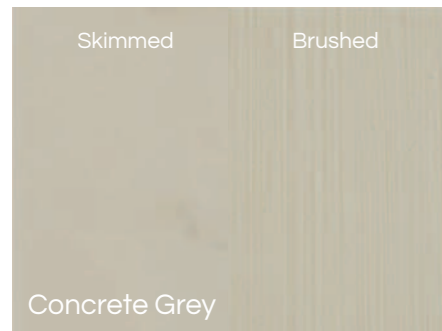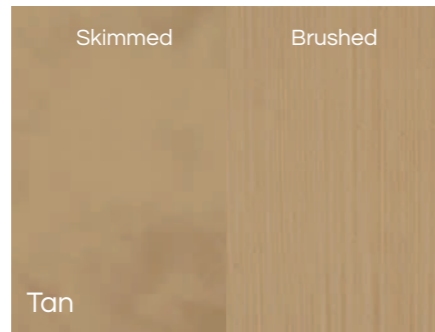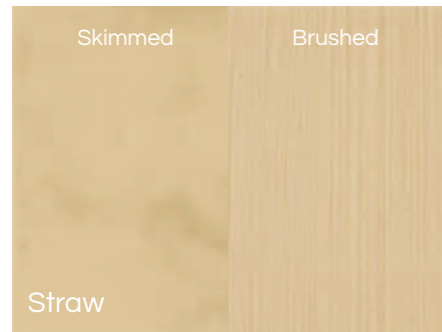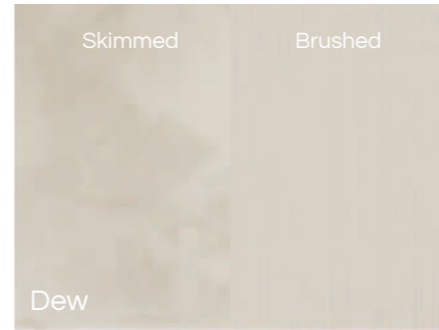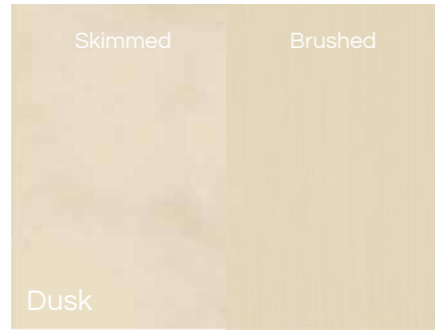

CemCote Skimmed custom colour

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.


SATINCRETE

DECORATIVE INTERIOR COLOURED PLASTER



SatinCrete Dolphin Grey

The colours depicted are a guide only and Concrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

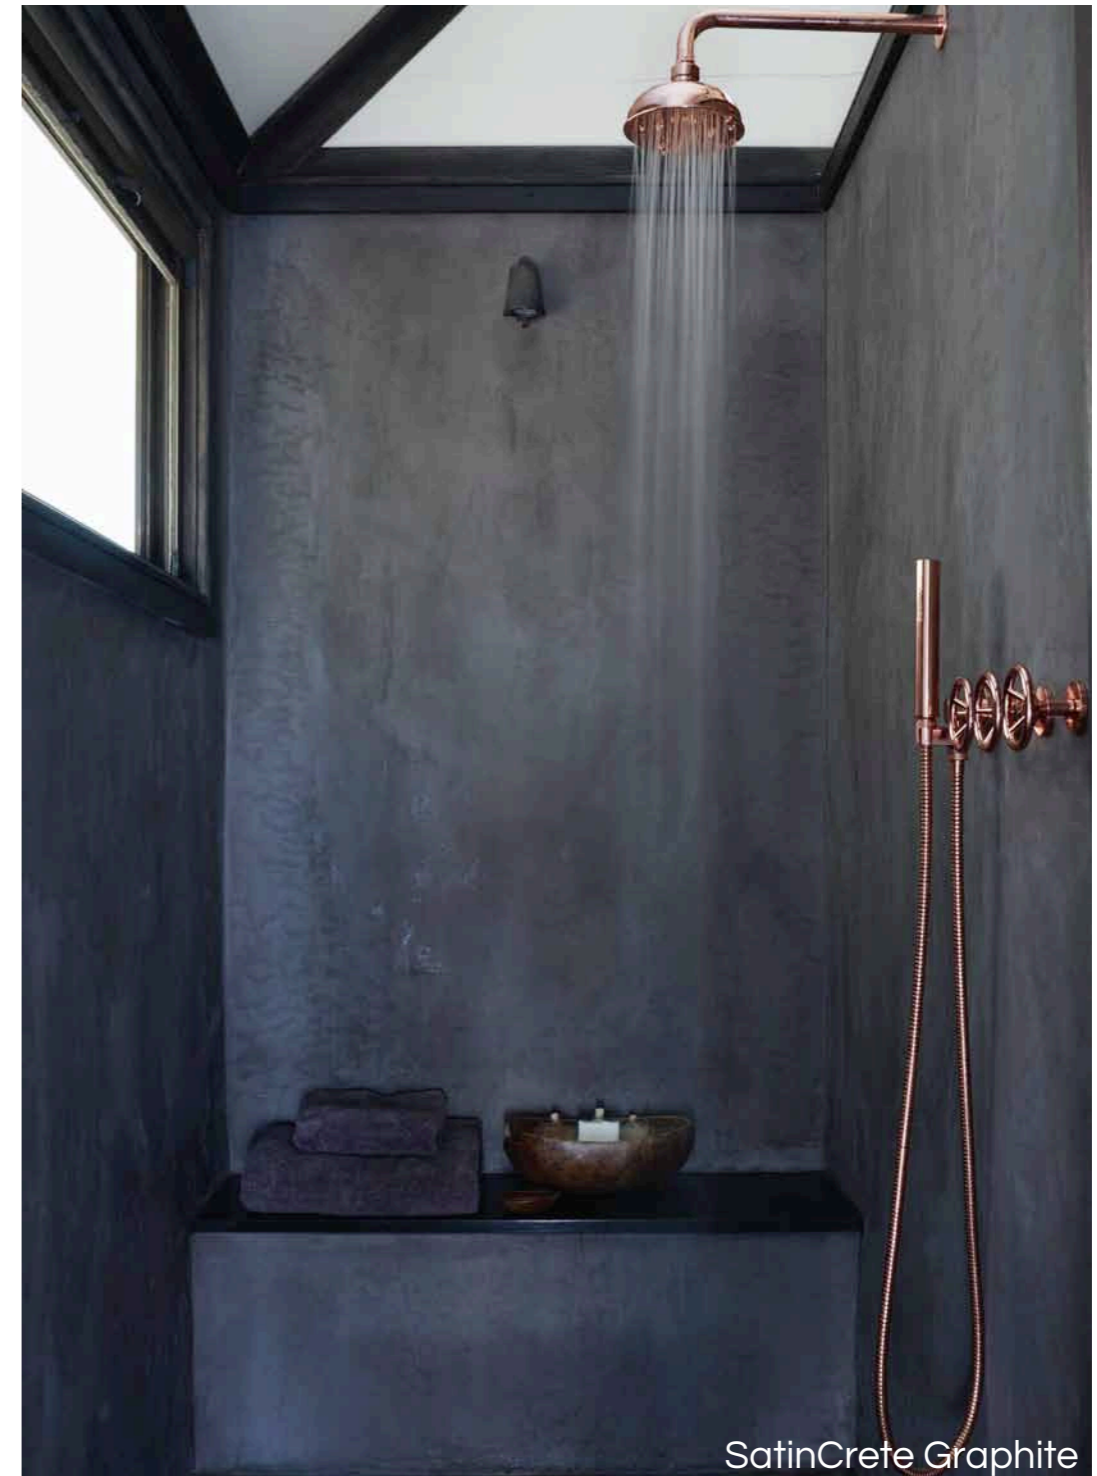

SatinCrete Graphite

SatinCrete is a 2 - 3mm pigmented, cement-based decorative plaster that creates a smooth, coloured finish for interior use only.

SUITABLE SURFACES

Wood floated plaster. Fibre cement board, new dry walling, previously painted surfaces & polystyrene all need to be primed with CemBond & coated with Cemcrete's EIFS BaseCoat or BaseCoat Paste.

FINISH

Smooth, sponge, brush or combed.

THICKNESS

2 - 3mm.

APPLICATION

Trowel-on.

CURING

Initial set: 1.5 - 2 hours. Leave to air cure for at least 24 hours before moist curing with a light mist spray of water at least 3 times during the day. Always spray from bottom to top to avoid water run marks. Allow to dry for at least 3 days before sealing. The moisture in the substrate must be less than 5% prior to sealing.

PACKAGING

20kg bag.

COVERAGE

Approximately 3 - 4m² per 20kg bag.




BENEFITS

- Stunning interior mottled wall coating
- Ideal for bathroom walls, including shower walls
- Once sealed, easy to clean and maintain due to its smooth finish
- Versatile application: can be applied to counter tops and vanities




COUNTERTOP / VANITY
SatinCrete Pewter


BUILT-IN SEATING, COUNTER & WALL
SatinCrete Clay

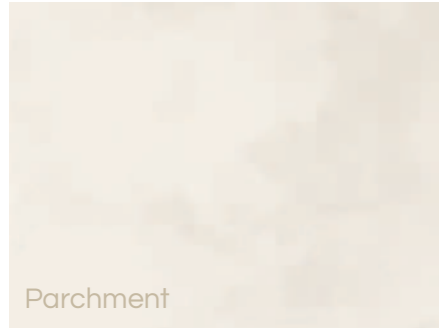


Parchment

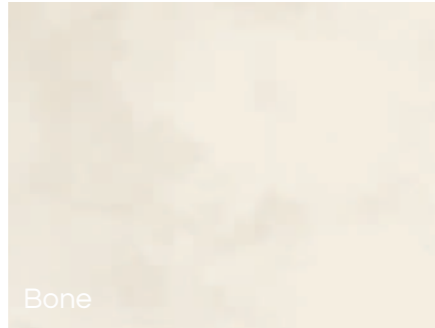


Bone

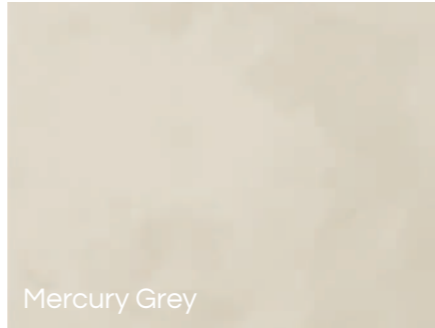


Mercury Grey

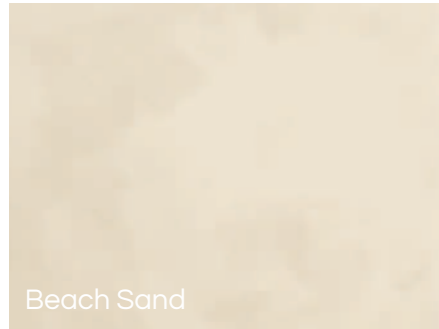

Beach Sand

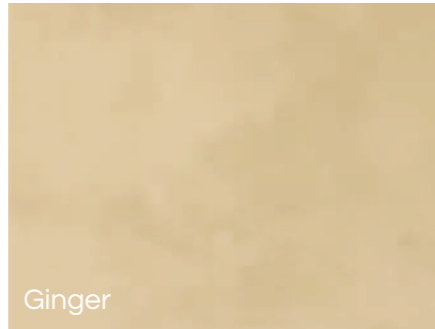

Ginger

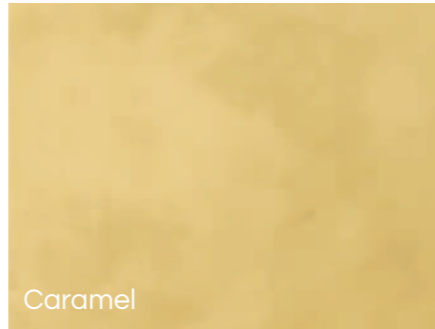


Caramel




Taupe




Cocoa

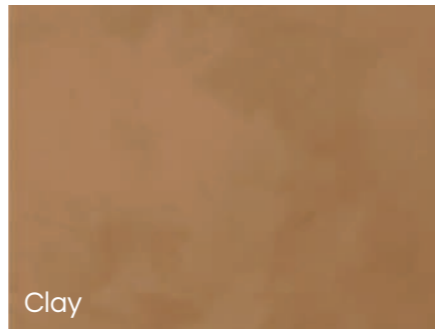


Clay

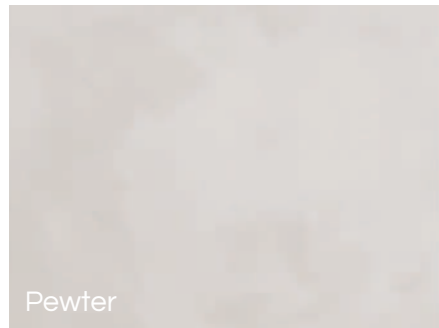


Pewter

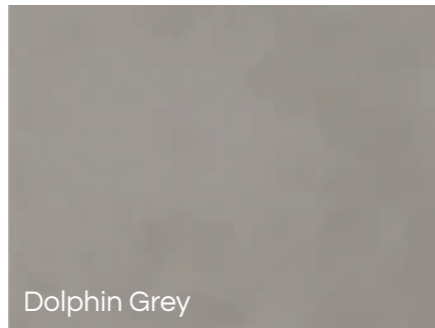

Dolphin Grey

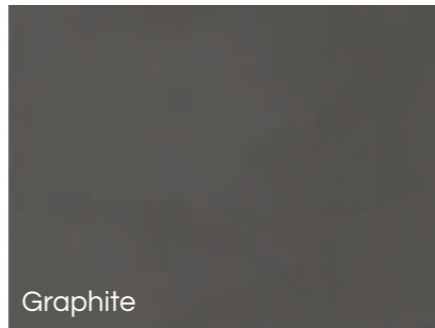

Graphite

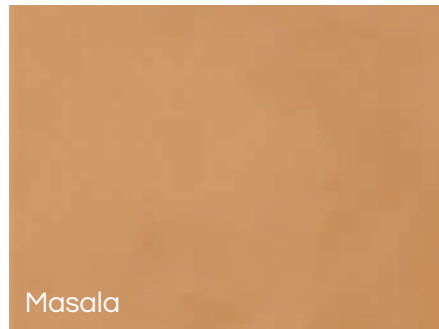

Masala

Did you know

Like many of our products, SatinCrete is very versatile and can be used to coat counters, artwork, showers and even baths.



SatinCrete Pewter

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

TPC

DURABLE PIGMENTED COATING FOR WALLS, CEILING & ROOFS



Thermoplastic Coating Custom Colour

Thermoplastic Coating is a tough, thermoplastic, textured, weatherproof coating. Contains Mica & Silica for maximum film protection against ultra-violet light & weather abrasion.

SUITABLE SURFACES
Can be applied to exterior or interior walls of industrial, commercial or domestic buildings. Concrete & corrugated iron roofs. Ceilings.

FINISH
Smooth.
Slightly textured version (by order only).

THICKNESS
Approximately 60 microns per coat; the Mica chips protrude higher.

APPLICATION
Paint or roller. Can also be sprayed-on.


CURING
Two coat application with a minimum 6 hour interval between coats.

PACKAGING
5 & 20 litre containers.

COVERAGE
Approximately 3 - 6m²/ litre/ coat.




Cream



Ivory



Concrete Grey




Straw



Charcoal



Cocoa




Jasmine



White



Terracotta



Corn




Apricot



Slate



Mushroom



Oyster Pink



Clay



Green

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



HEAD OFFICE

Showroom & Warehouse
8 Telford Street
Industria
(011) 474 2415
info@cemcrete.co.za

GAUTENG

Johannesburg Showroom
227 Jan Smuts Avenue
Parktown North
(011) 447 3149
jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park
26 Jakaranda Street
Centurion
(012) 653 6808
pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse
Unit 3 Eagle Park
cnr Bosmansdam & Omuramba Roads
Montague Gardens
(021) 555 1034
cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.

CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes
as *unique* as you are.