



ICEMCRETE®

Manufacturers of Distinctive Decorative Coatings

COLOUR HARDENER

DRY-SHAKE SCREED FLOOR FINISH


COLOUR HARDENER

DRY-SHAKE SCREED FLOOR FINISH



Colour Hardener House Blend

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

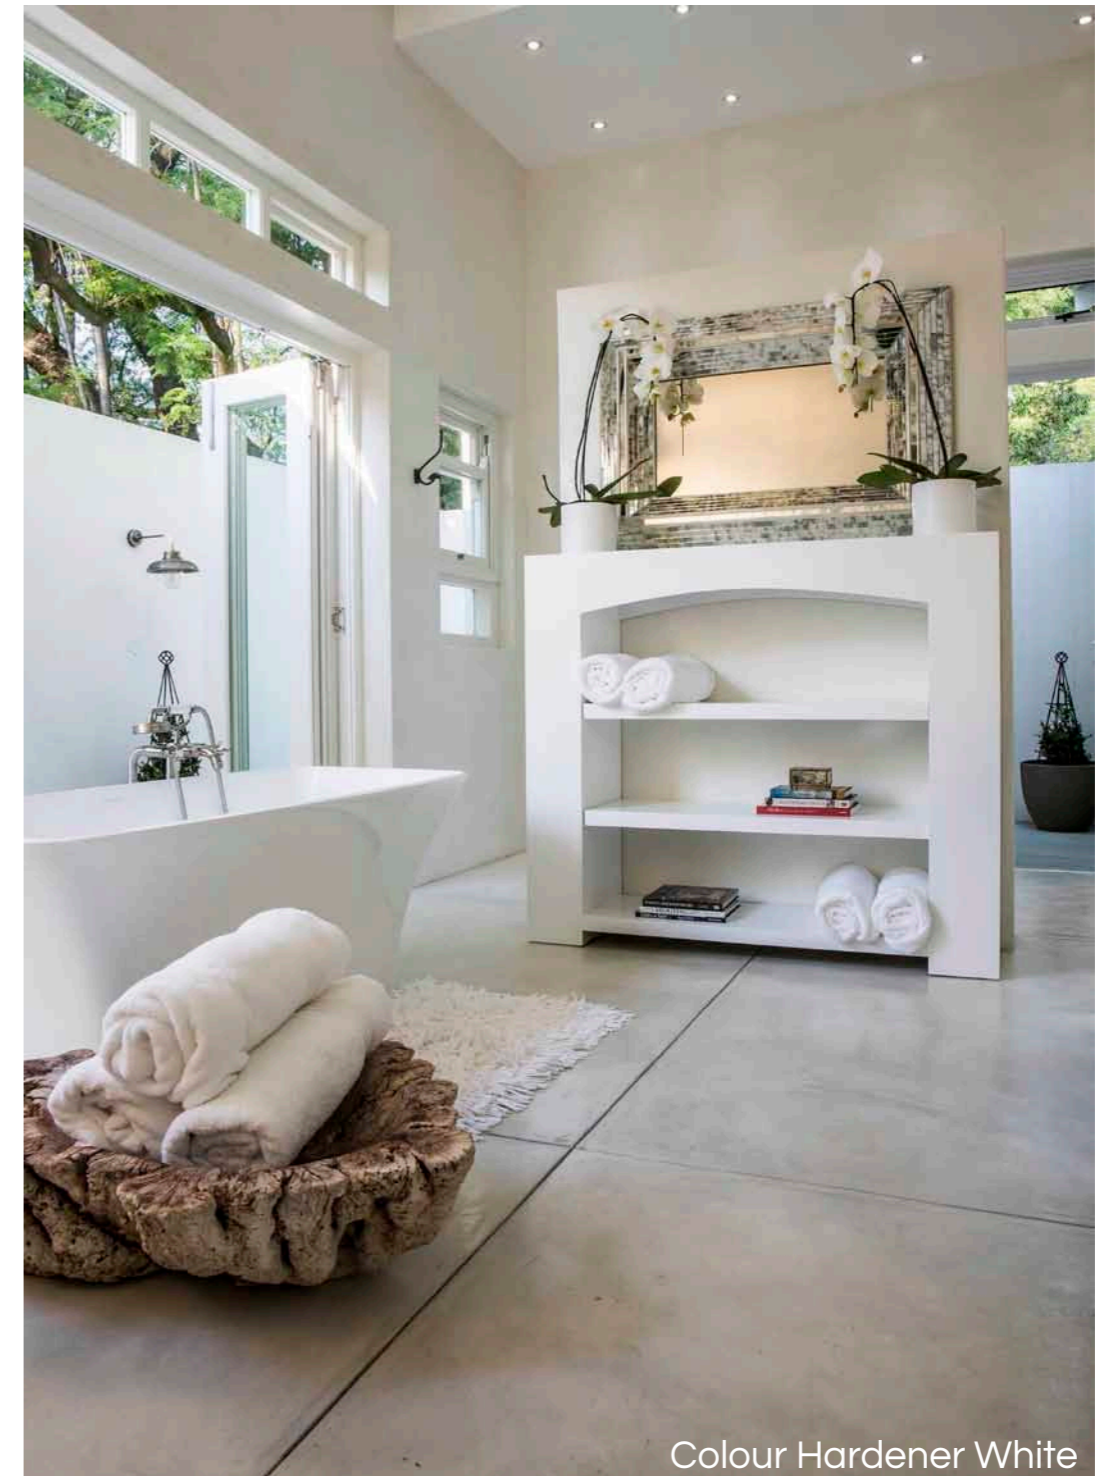

Colour Hardener White

A granolithic concrete material that is floated into fresh screed or concrete which colours, strengthens & creates durable surfaces for concrete floors. It is a special blend of cement incorporating very hard-wearing aggregates, light fast pigments & additives which set rock-hard.

SUITABLE SURFACES

New / fresh interior & exterior concrete or screed base.

FINISH

Steel trowel to a smooth finish. Can be textured, stamped or rolled to obtain different tiled or paved effects.

THICKNESS

Depending on screed design - colour penetrates 2 - 3mm into screed.

APPLICATION

Sprinkle-on & trowelled. Can be power floated as well.

CURING

Leave to air cure for 1 day after completion. Damp down with water twice daily for 7 days. Allow to dry for a minimum of 14 days before sealing.


PACKAGING

20kg bag.

COVERAGE

Approximately 5m² per 20kg bag.

**WATCH
THE VIDEO**

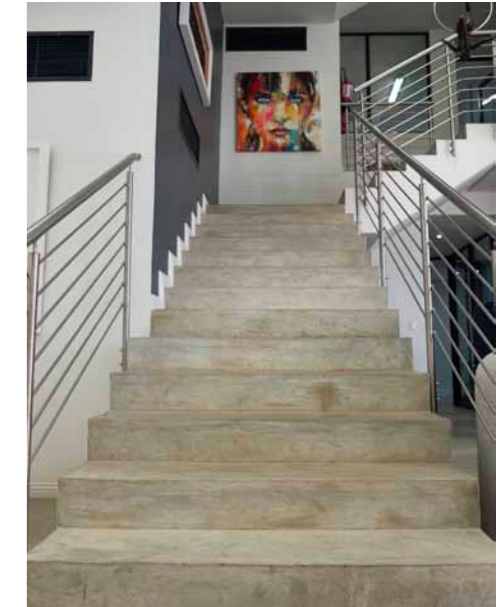

COUNTERTOPS
Colour Hardener House Blend



POOL COPINGS
Colour Hardener White

BENEFITS

- Suitable for interior & exterior floors
- Suitable for domestic or commercial projects
- Colours concrete to a depth of 2 - 3mm (no risk of colour being rubbed off or abraded)
- Extremely durable (dependent on screed mix and curing)
- Can be used in conjunction with SuperScreed (10 - 20mm) where there are height restrictions
- Can be imprinted
- Can be power floated for large industrial applications




CUSTOM PANELS
Colour Hardener Grey



IMPRINTING
Colour Hardener Chai Latte



COLOUR HARDENER | COLOUR RANGE

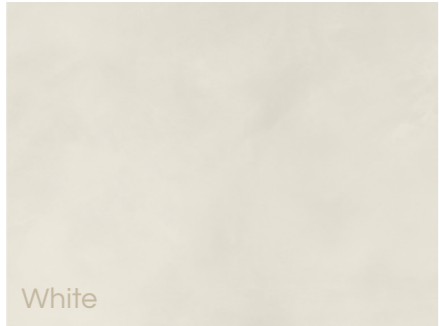

White




Vanilla Bean



Stone



Cobble Milk

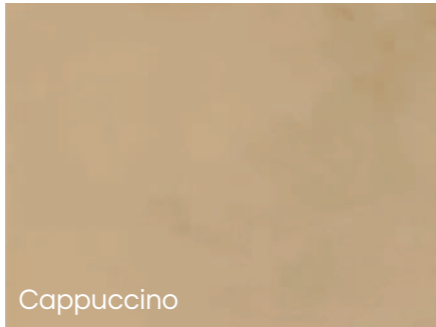


Cappuccino




Ochre




Ivory

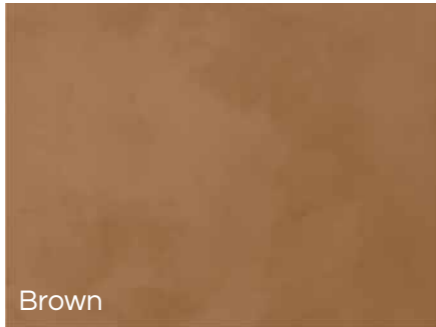


Brown

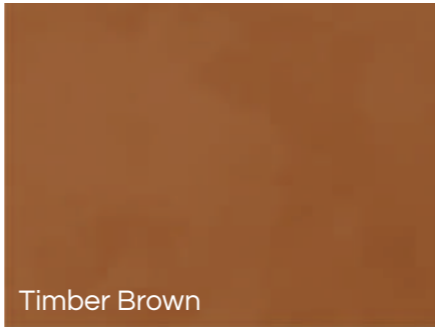

Timber Brown

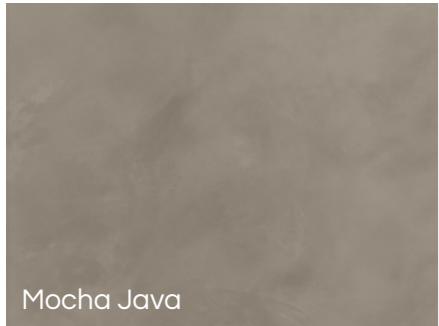

Mocha Java

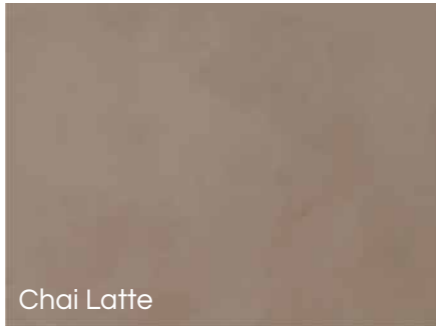


Chai Latte



Espresso



Grey

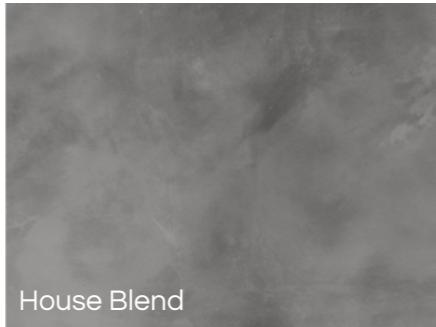

House Blend



Slate



Did you know

Colour Hardener floors should be designed with expansion / control joints incorporated into them, which will minimize the risk of large unsightly cracks when subjected to large changes in temperature, soil or foundation movement etc. Panel sizes should be as symmetrical as is possible and should not exceed 9m².

Colour Hardener Stone

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



HEAD OFFICE

Showroom & Warehouse
8 Telford Street
Industria
(011) 474 2415
info@cemcrete.co.za

GAUTENG

Johannesburg Showroom
227 Jan Smuts Avenue
Parktown North
(011) 447 3149
jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park
26 Jakaranda Street
Centurion
(012) 653 6808
pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse

Unit 3 Eagle Park
cnr Bosmansdam & Omuramba Roads
Montague Gardens
(021) 555 1034
cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.

CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes
as *unique* as you are.