

ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings



COUNTERTOPS

PRODUCTS TO CREATE / COAT COUNTERTOPS

COUNTERTOP MIX

CONCRETE COUNTERTOP PRE-CASTING MIX

COUNTERTOP MIX | PRODUCT INFORMATION & COLOUR RANGE



Countertop Mix White

Countertop Mix is a 3 component pre-casting mix that contains a proprietary blend of cements, and other admixtures to produce a high strength countertop.

SUITABLE SURFACES

Cast into mould made from wood (melamine) or rubber. All seams must be tight to prevent seepage of the Countertop Mix using silicon & a caulking gun. If caulk or any other fillers are used on the mould they must be fully hardened and dry before Countertop Mix is poured

FINISH

Picks up the finish of the mould. Can be diamond pad polished to expose aggregate.

APPLICATION

Casted.

THICKNESS

Minimum application thickness: 20mm. Maximum application thickness: Can go to 40mm but Check aggregate grading.

CURING


See datasheet for more information.

PACKAGING

20kg bags.

COVERAGE

Varies.

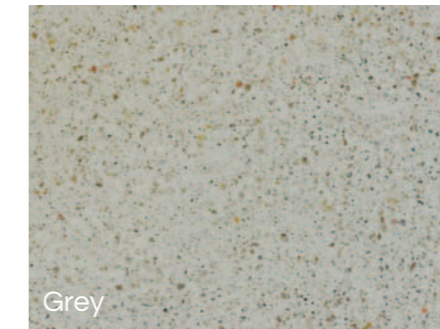

BENEFITS

- Suitable for use in commercial, residential and restaurant use
- Fully customisable to your specific requirements such as size, colour, shape, built-in features, etc
 - Produces a high-strength countertop
- Fully customisable casting mix i.e. can use a variety of aggregates to change the appearance
 - Can cast counters according to any mould
- Unique cement counter and not premanufactured



Colour Hardener Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

COLOUR HARDENER

DRY-SHAKE SCREED FLOOR FINISH



Colour Hardener House Blend

A granolithic concrete material that is floated into fresh screed or concrete which colours, strengthens & creates durable surfaces for concrete floors. It is a special blend of cement incorporating very hard-wearing aggregates, light fast pigments & additives which set rock-hard.

SUITABLE SURFACES

New / fresh interior & exterior concrete or screed base.

FINISH

Steel trowel to a smooth finish. Can be textured, stamped or rolled to obtain different tiled or paved effects.

THICKNESS

Depending on screed design - colour penetrates 2 - 3mm into screed.

APPLICATION

Sprinkle-on & trowelled.

CURING

Leave to air cure for 1 day after completion. Damp down with water twice daily for 7 days. Allow to dry for a minimum of 14 days before sealing.

PACKAGING

20kg bag.

COVERAGE

Approximately 5m² per 20kg bag.



COUNTERTOPS
Colour Hardener House Blend



POOL COPINGS
Colour Hardener White

BENEFITS



- Suitable for interior & exterior floors
- Suitable for domestic or commercial projects
- Colours concrete to a depth of 2 - 3mm (no risk of colour being rubbed off or abraded)
- Extremely durable (dependent on screed mix and curing)
- Can be used in conjunction with SuperScreed (10 - 20mm) where there are height restrictions
- Can be imprinted




CUSTOM PANELS
Colour Hardener Grey



IMPRINTING
Colour Hardener Chai Latte

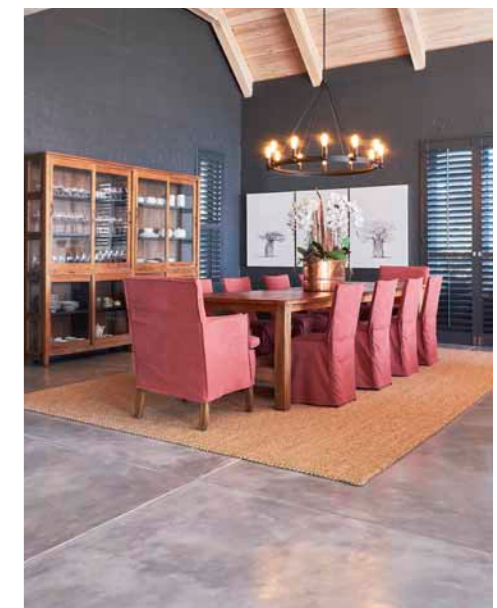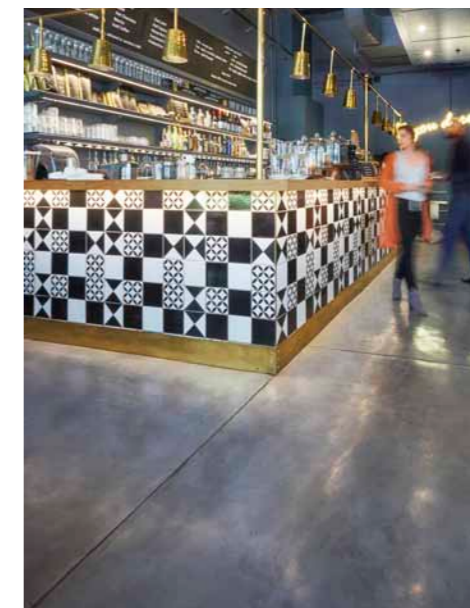

COLOUR HARDENER | COLOUR RANGE

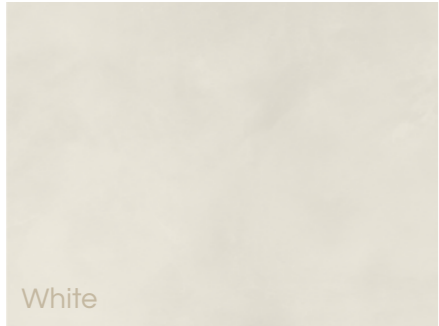

White




Vanilla Bean



Stone



Cobble Milk

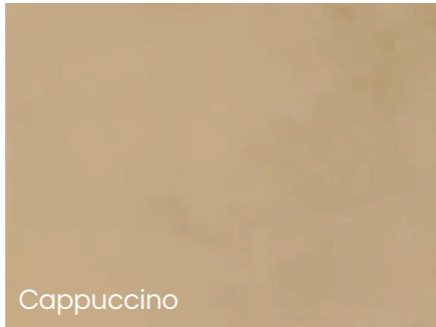


Cappuccino




Ochre



Ivory

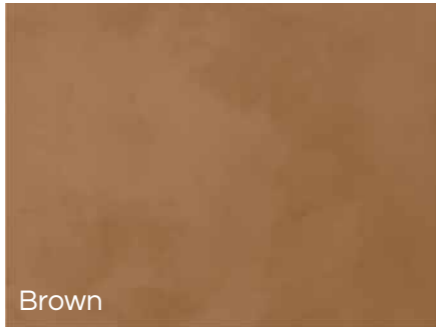


Brown

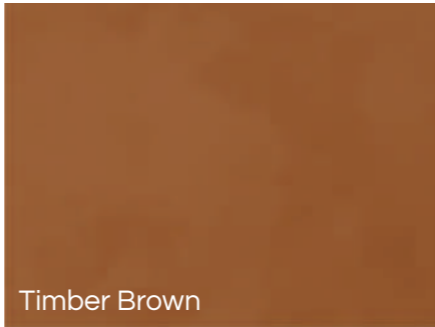

Timber Brown



Mocha Java

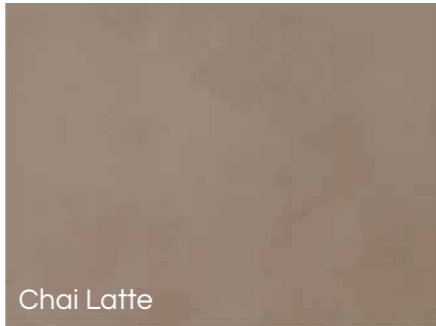


Chai Latte



Espresso



Grey

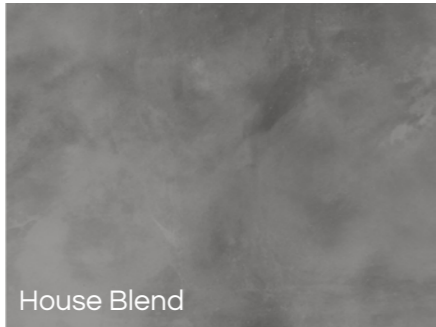

House Blend



Slate



Did you know

Colour Hardener floors should be designed with expansion / control joints incorporated into them, which will minimize the risk of large unsightly cracks when subjected to large changes in temperature, soil or foundation movement etc. Panel sizes should be as symmetrical as is possible and should not exceed 9m².

Colour Hardener Cobble Milk

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.


CRETECOTE

THIN SKIM-ON FLOOR COATING



CreteCote Nickel Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

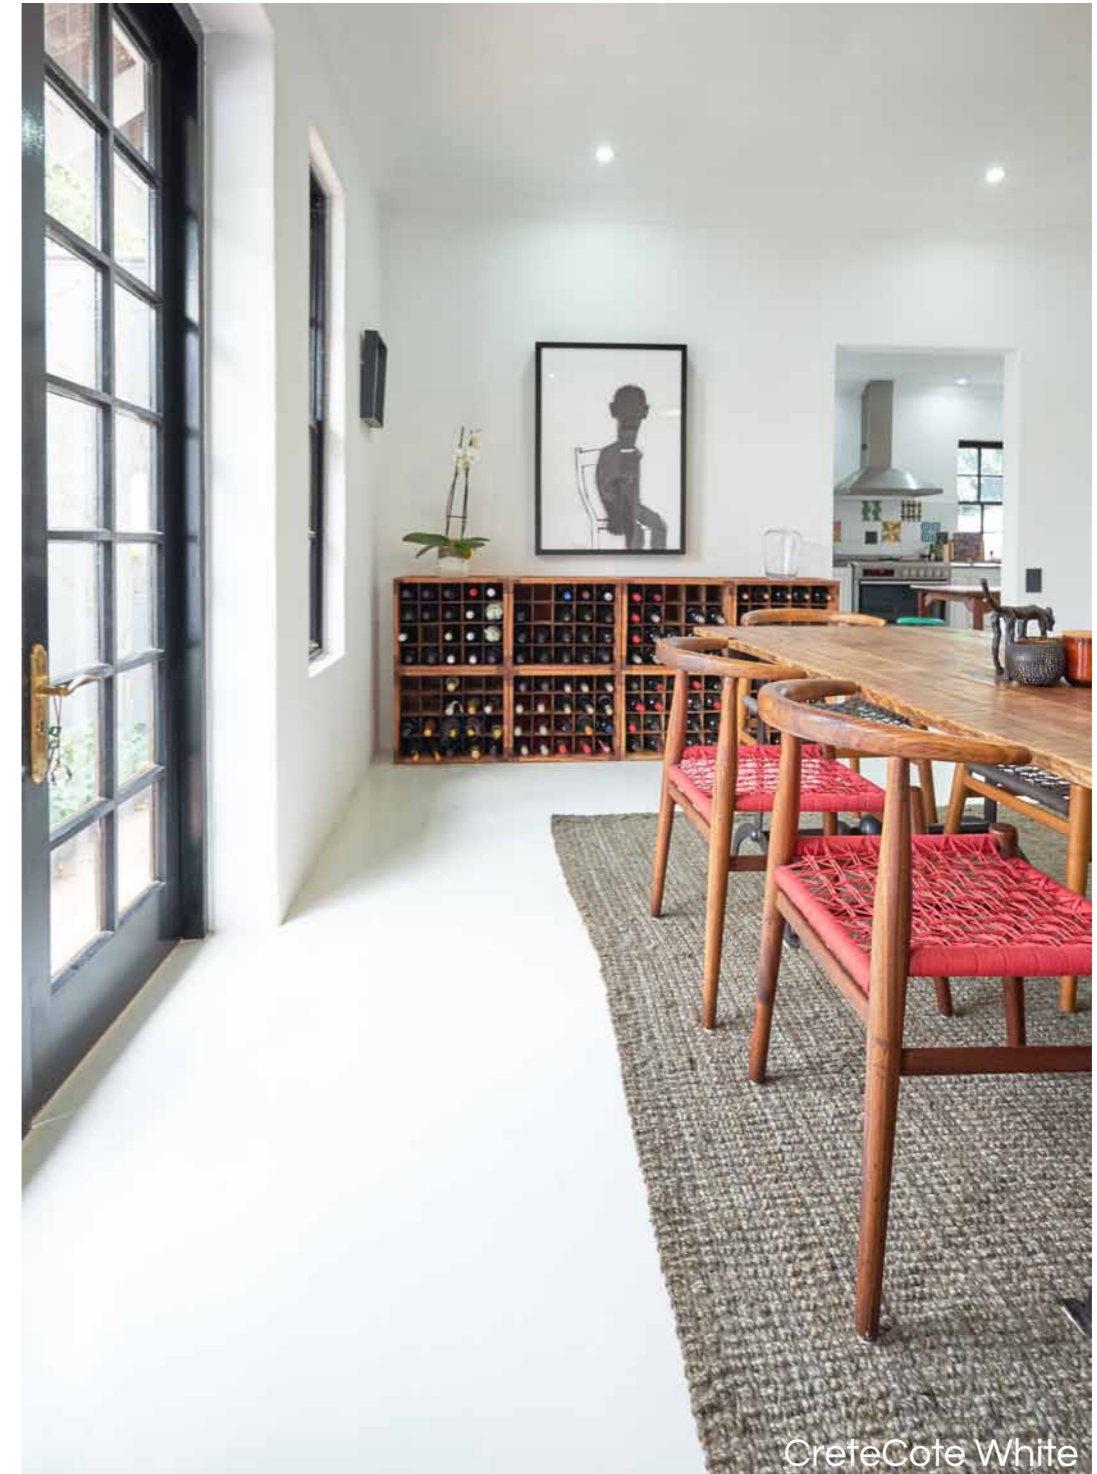

CreteCote White

A coloured, thin film cement-based floor covering which is versatile & durable. It is a two coat system which produces a 1.6mm smooth decorative finish ideal for internal domestic renovations. Comes complete with powder & catalyst as a twin-pack.

SUITABLE SURFACES

Interior surfaces only. Wood or steel floated concrete floor slabs or screeds. New surfaces should be allowed to cure for at least 28 days. Tiles with the necessary preparation steps to ensure even suction & adhesion (refer to coating over tiles datasheet).

FINISH

Smooth.

THICKNESS

1.6mm (maximum 0.8mm per coat – 2 coat application).

APPLICATION

Sponge & trowel-on.

CURING

The completed work should be allowed to air cure for 48 hours before sealing. The moisture in the floor must be less than 5% prior to sealing.

PACKAGING

15kg twin-pack container.

COVERAGE

8 - 10 m² per 15kg container.



COUNTERTOP / VANITY
CreteCote Nickel Grey



BUILT-IN SEATING
CreteCote custom colour

BENEFITS

- Thin skim-on coating perfect for renovations
- Application with a steel trowel
- Versatile application – can be used to coat counters & vanities
- Reaches a compressive strength of 35MPa after 28 days (this is solely dependent on the substrate)



TILE INLAY
CreteCote custom colour




SEAMLESS FLOOR & BATH
CreteCote Shale






White

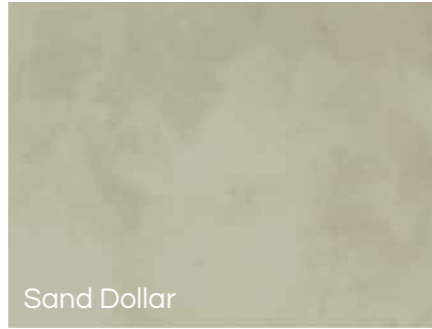

Sand Dollar




Grey

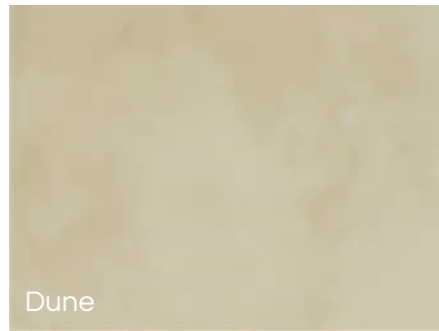

Dune




Coconut

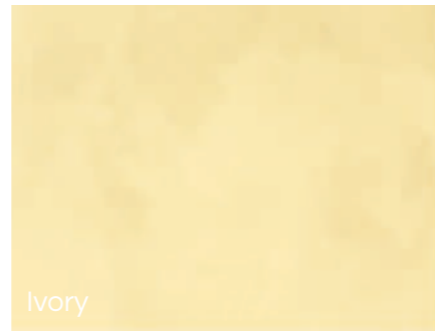

Ivory



Mushroom

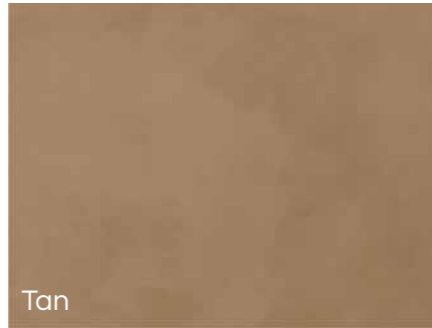


Tan



Brown Suede




Nickel Grey

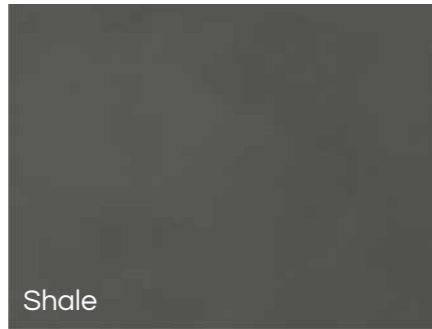

Shale

Did you know

CreteCote is a micro coating and was created to provide the look and feel of concrete, but at a fraction of the cost and weight of real concrete.

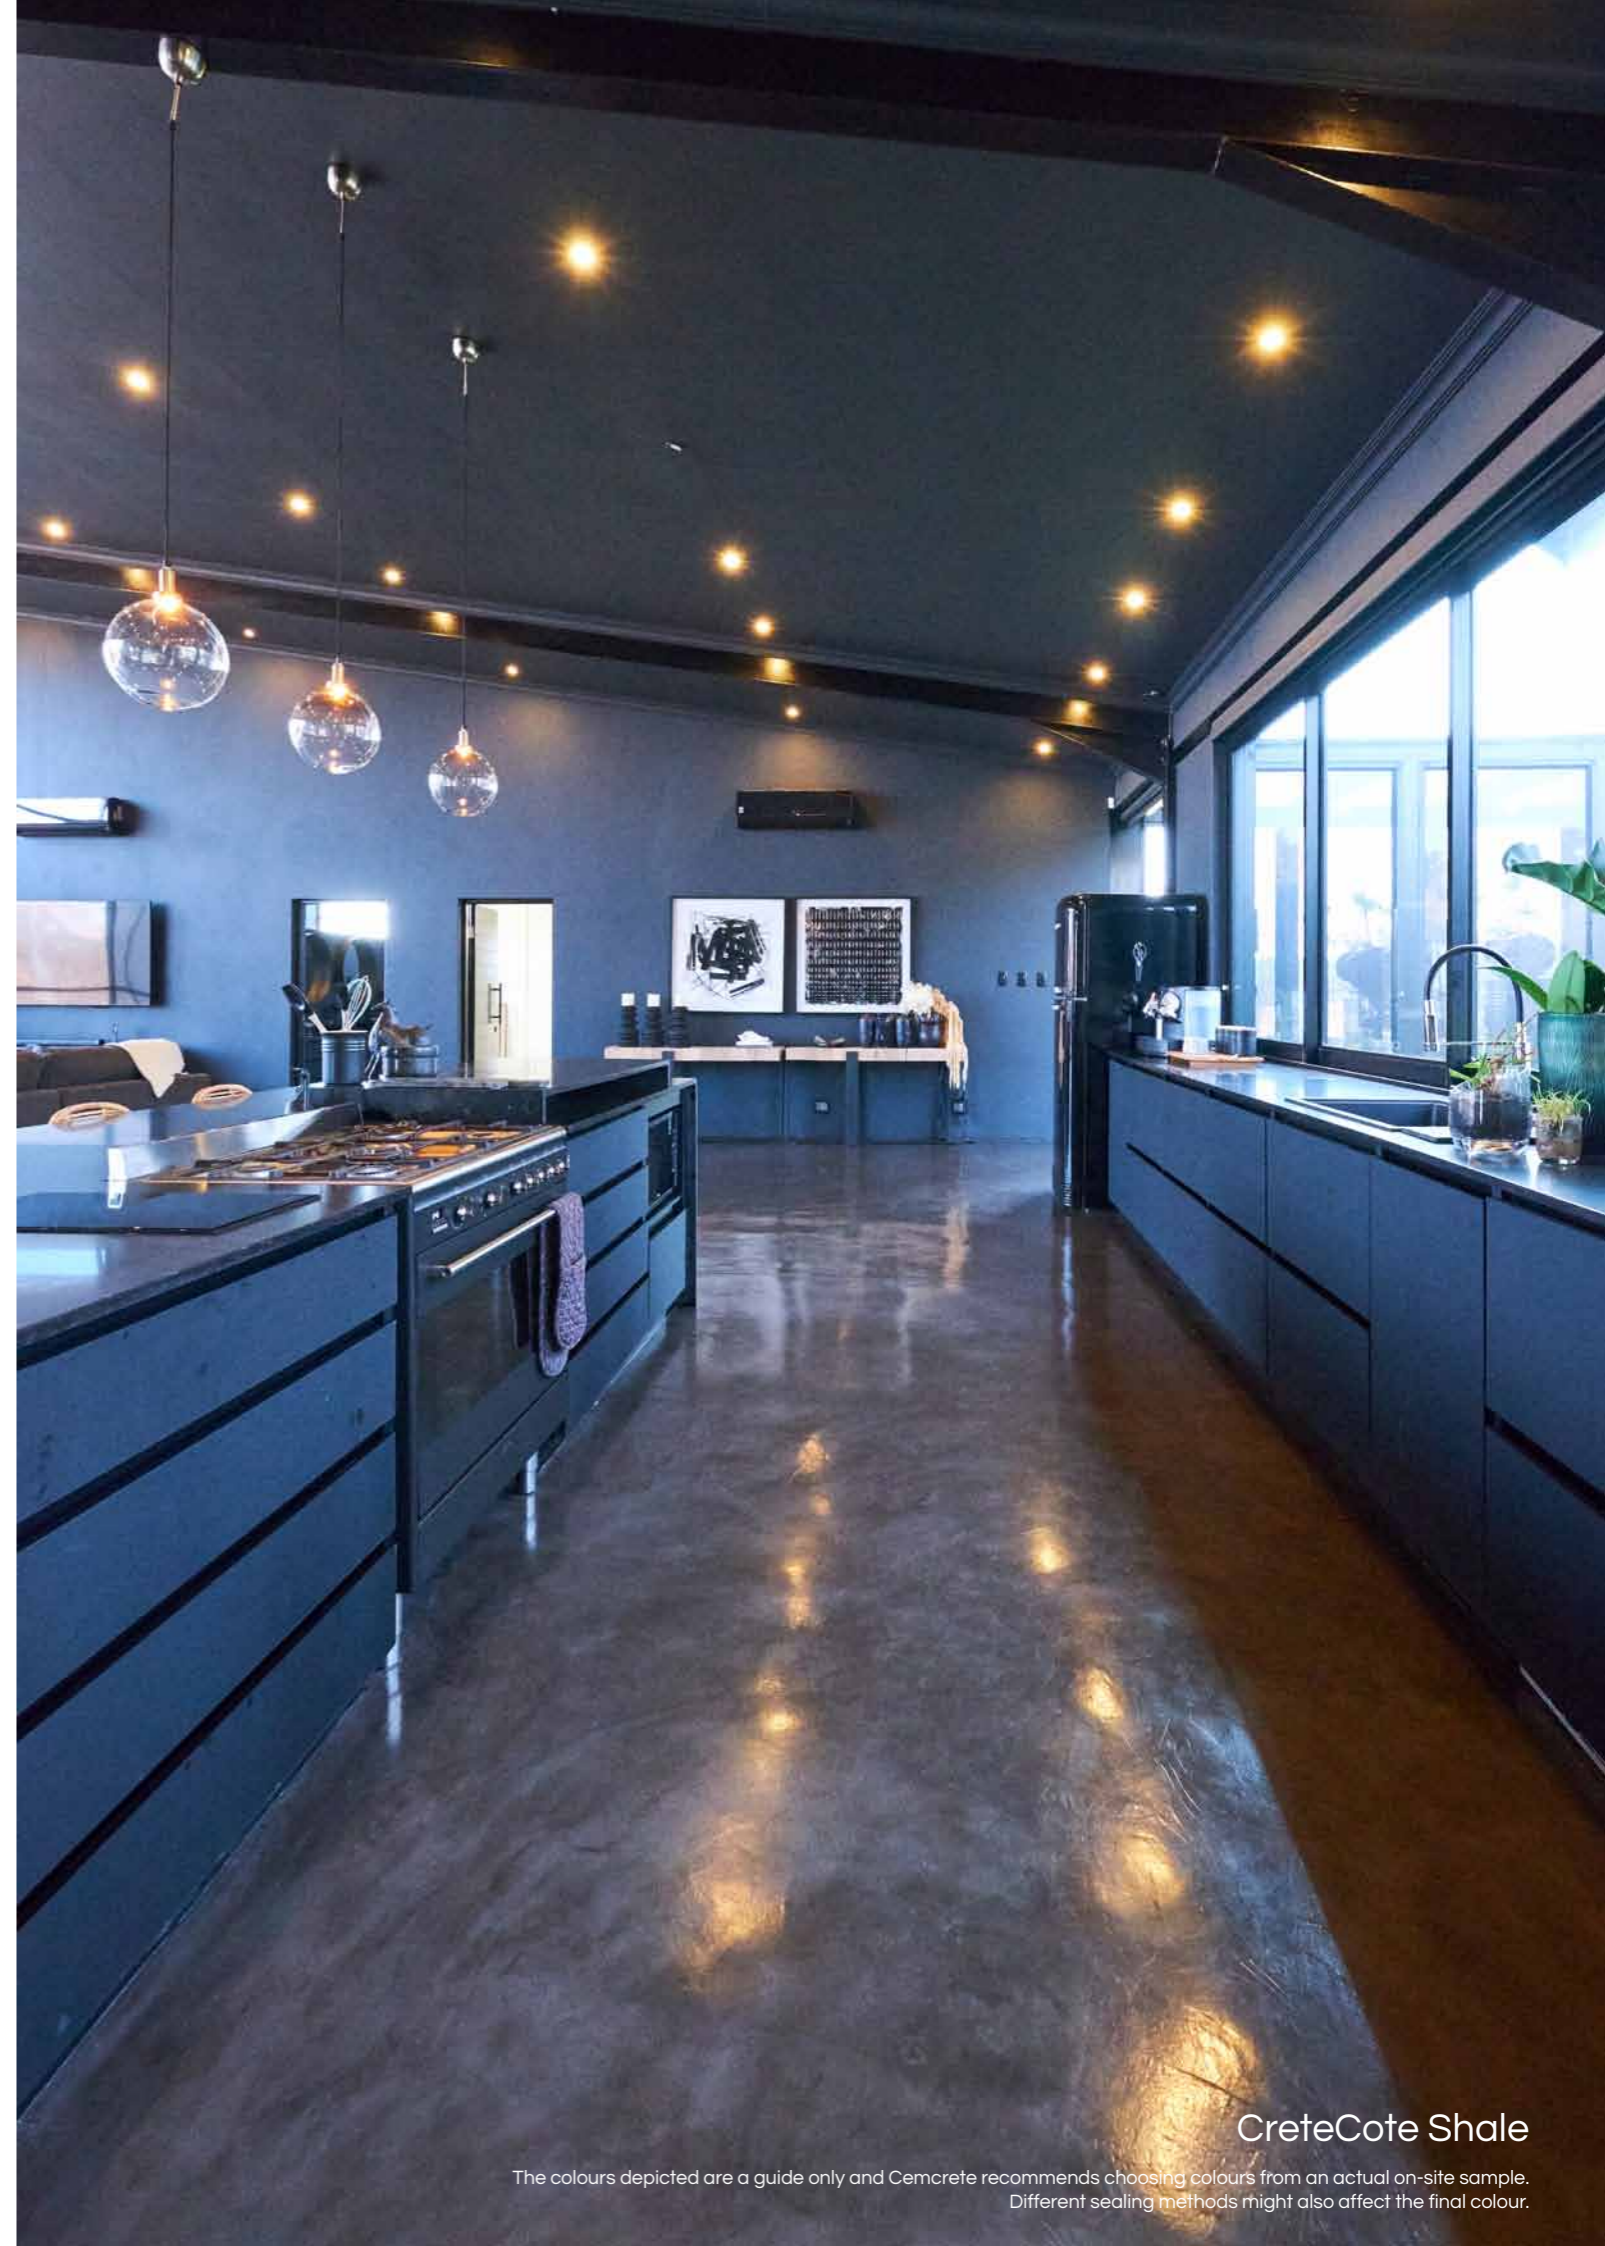

CreteCote Shale

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



RenoCrete Cloud Grey - Smooth Application

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

RENOCRETE

VERSATILE SMOOTH / TEXTURED OVERLAY



RenoCrete Driftwood - Knock-Down Application

RenoCrete is a pre-coloured spray or trowelled-on cement-based polymer modified two-part resurfacing systems. RenoCrete beautifies existing surfaces while achieving good compressive, tensile & flexural strength.

SUITABLE SURFACES

Interior & exterior concrete or screed base such as driveways, patios, walkways, pool surrounds, etc.

FINISH

Sprayed-on / Trowelled-on / Knock-down.

THICKNESS

2 - 3mm.

APPLICATION

Spray-on with a hopper gun or steel trowelled.

CURING

Approximately 3 - 5m² per 20kg bag.

PACKAGING

20kg bag.

COVERAGE

Approximately 3 - 5m² per 20kg bag.





POOL SURROUND
RenoCrete Cloud Grey

BUILT-IN SEATING
RenoCrete Oyster


BENEFITS

- Beautifies existing concrete surfaces
- Achieves good compressive, tensile & flexural strength with abrasion resistance
- Suitable for redressing concrete; driveways, walkways, outside patios, pool surrounds & balconies
- Available in multiple finishes, from smooth trowelled to sprayed-on & knock-down
- Interior & exterior use
- UV stable

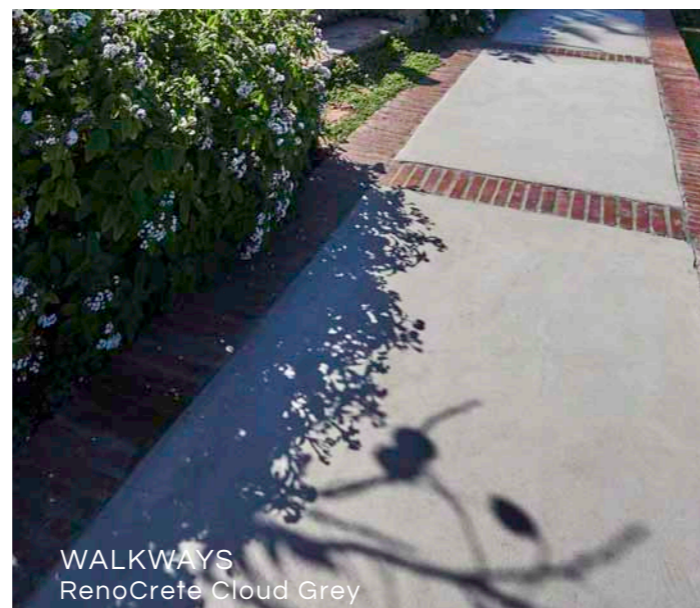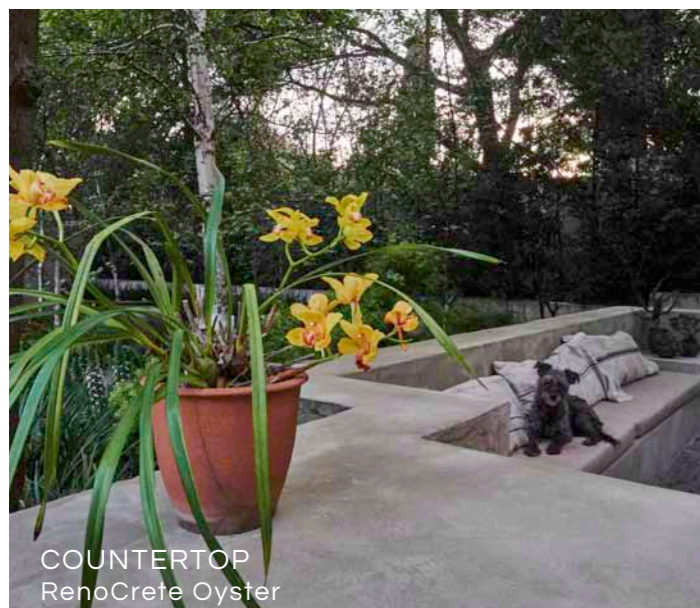


COUNTERTOP
RenoCrete Oyster

WALKWAYS
RenoCrete Cloud Grey

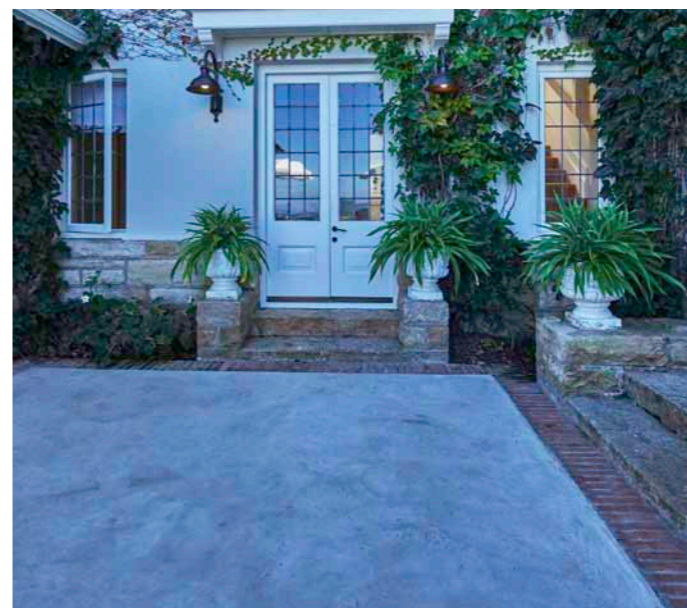


RENOCRETE | COLOUR RANGE

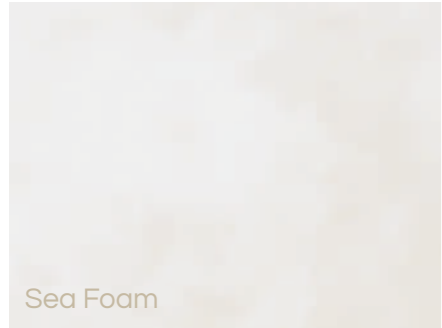


Sea Foam




Cuttlefish

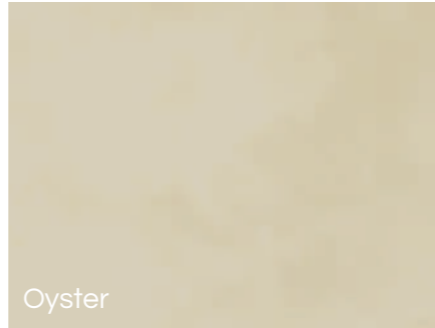


Oyster

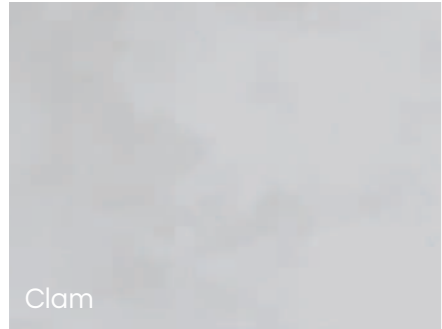


Clam

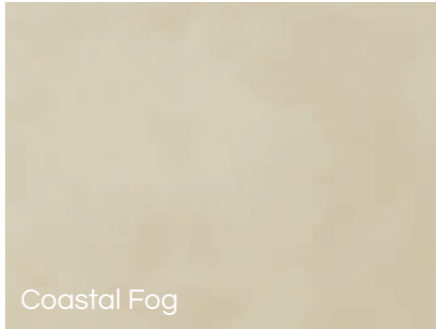

Coastal Fog

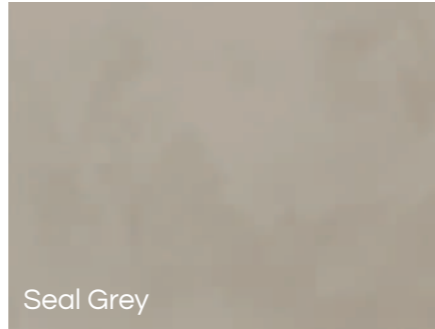


Seal Grey

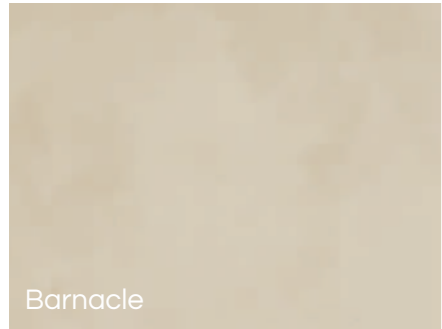


Barnacle



Cloud Grey

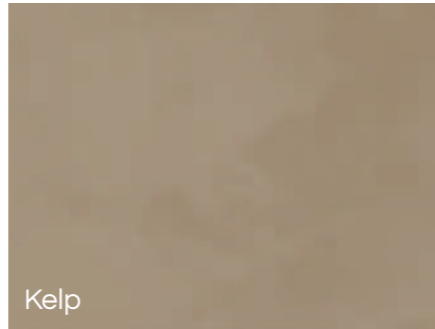


Kelp

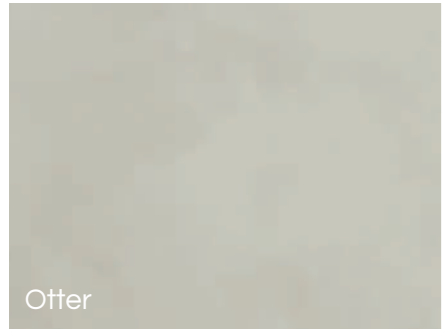


Otter




Dirftwood

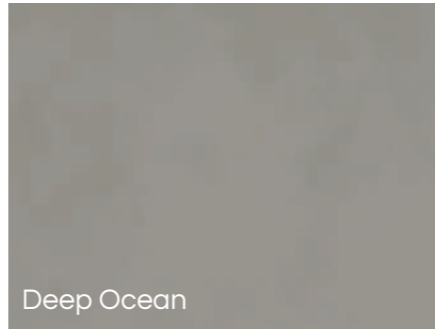

Deep Ocean

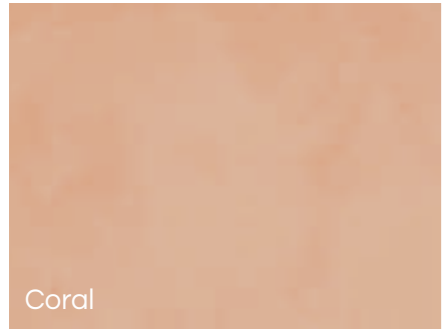

Coral

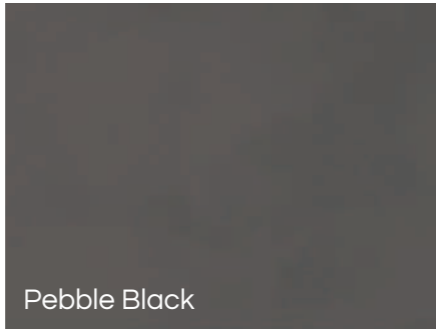

Pebble Black



Mollusc



RenoCrete Cloud Grey

Final colours for the spray and knock-down applications will vary from the smooth trowelled application. Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



CemCote Skimmed Custom Colour

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

CEMCOTE

BRUSH OR SKIM-ON CEMENT COATING



CemCote Skimmed Dark Grey

A finely ground mixture of white Portland cement, pigments and chemicals. It is supplied in powder form requiring mixing with water on-site to produce a smooth, flowing coating which sets rock hard.

SUITABLE SURFACES

Interior & exterior plastered or previously painted walls.

FINISH

Slightly textured when applied with a brush.
Smooth when applied with a trowel.

THICKNESS

1.6 - 2.5mm.

APPLICATION

Brush-on or Putzmeister application:
Refer to CemCote Brushed datasheet.
Skim-on:
Refer to CemCote Skimmed datasheet.

CURING



Initial set - 1 hour. The completed work should be allowed to air cure for 24 hours after application, before mist spraying the entire wall from bottom to top (to prevent run marks) evenly at least twice during the day thereafter. The moisture in the substrate must be less than 5% prior to sealing.

PACKAGING

5 & 25kg containers.

COVERAGE

Brush-on or Putzmeister application: 2 - 5m² per kg/coat depending on suction and texture of the surface or 25 - 50m² per 25kg (2 coats).
Skim-on: 1 - 1.1kg's per m² or 25 - 30m² (2 coats) per 25kg container. Depending on surface texture and porosity.

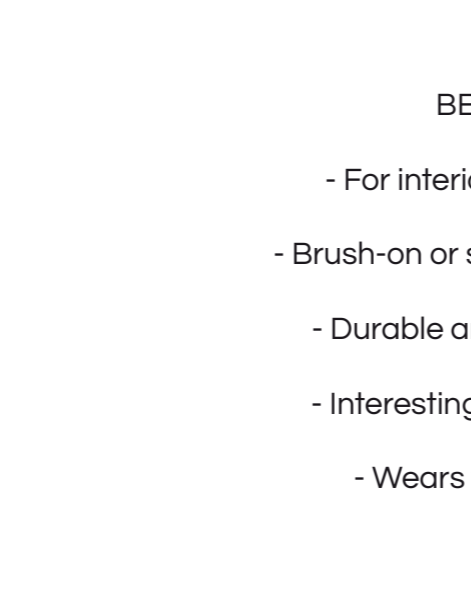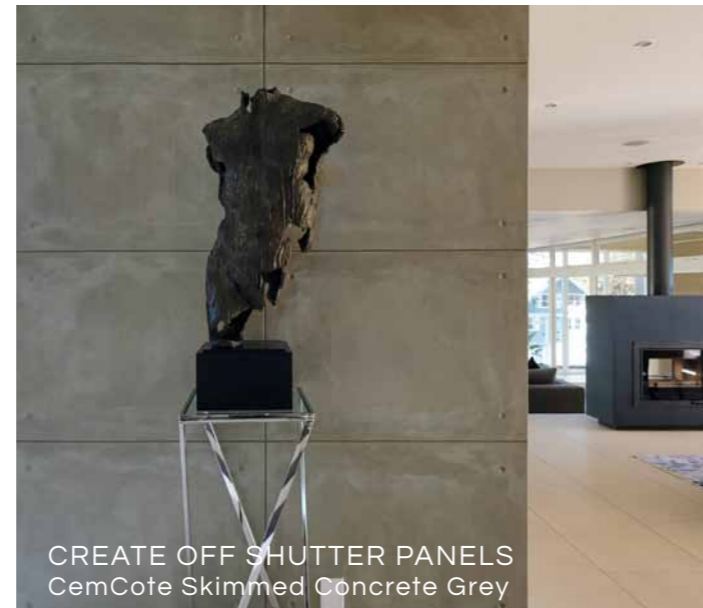












BENEFITS

- For interior & exterior use
- Brush-on or skim-on application
- Durable and weatherproof
- Interesting colour variation
- Wears well over time



HOLLOW CORE HARDBOARD DOOR
CemCote Skimmed Anthill Grey

CEILING
CemCote Brushed Dark Grey

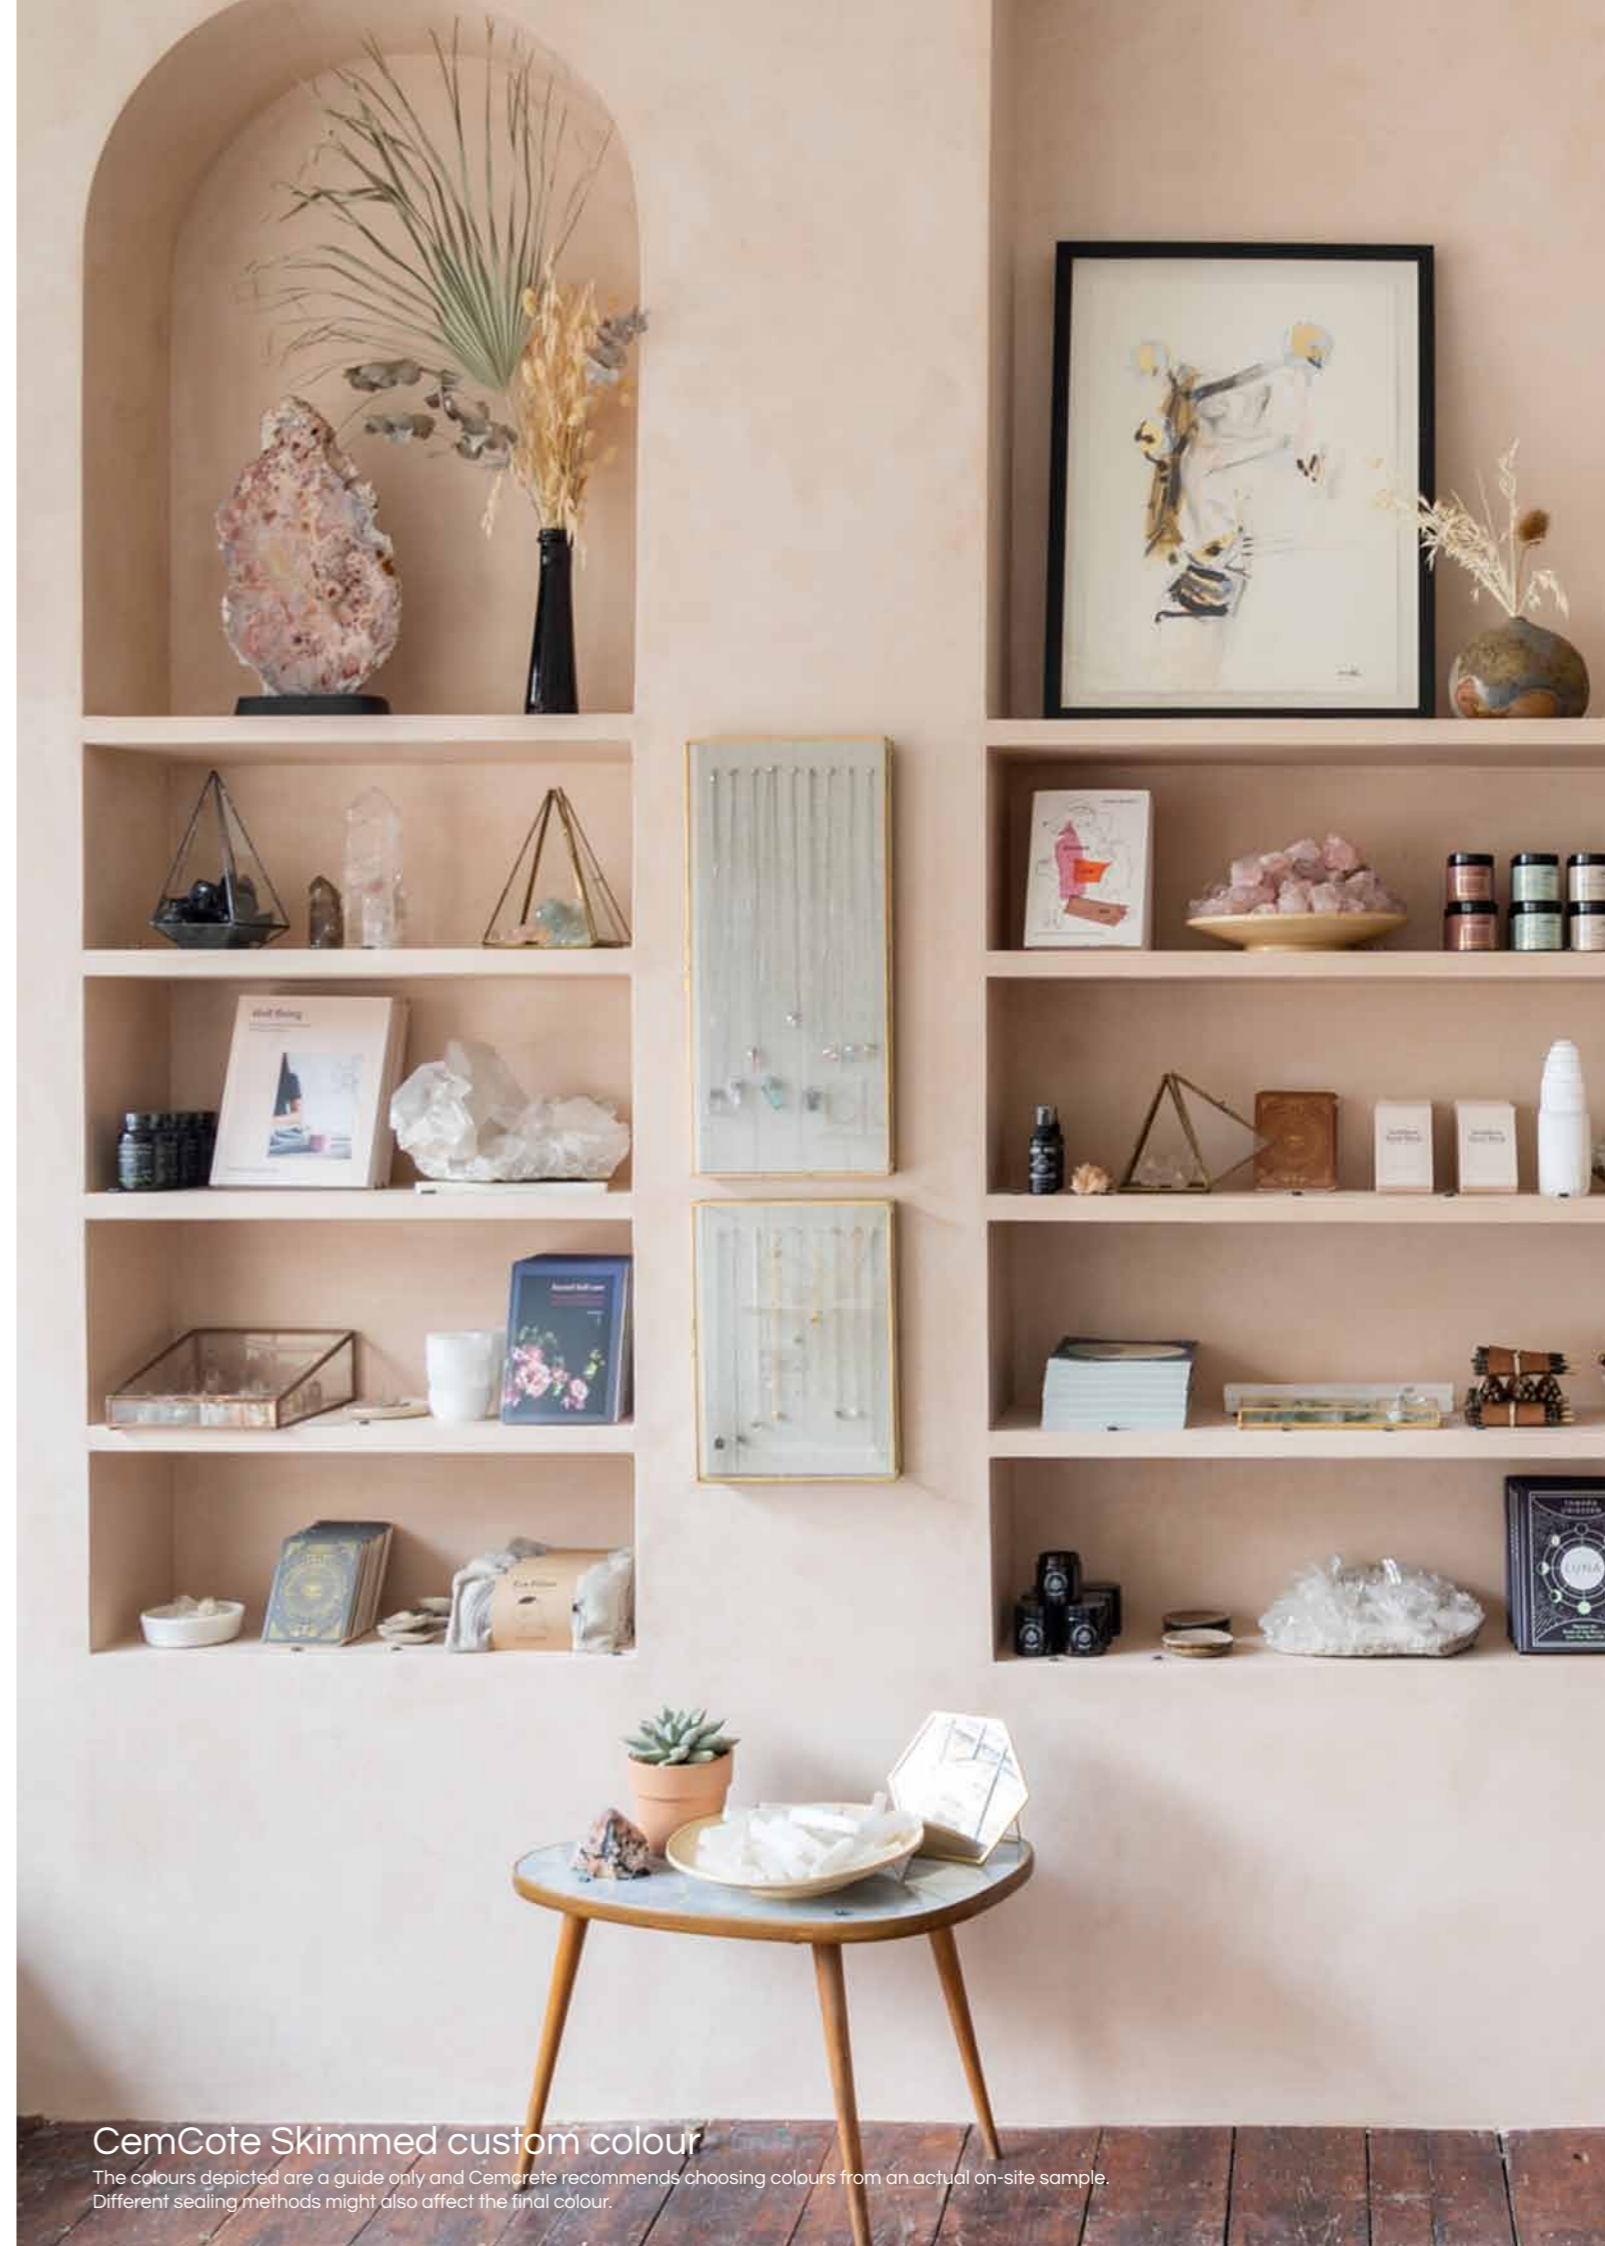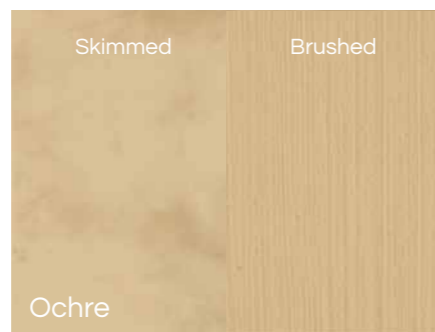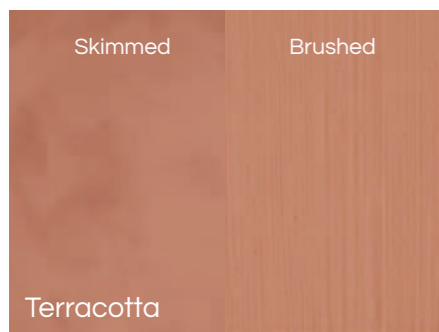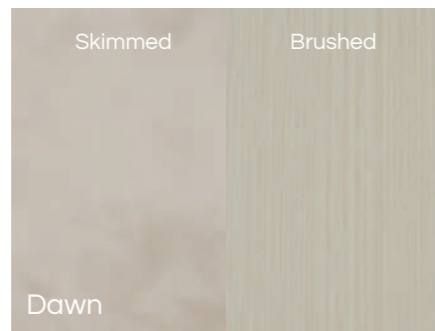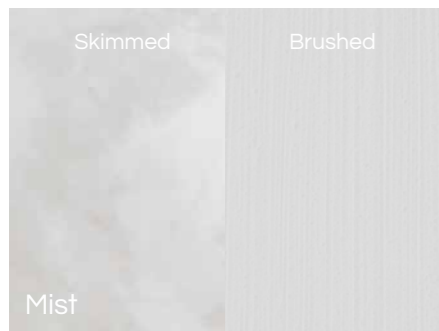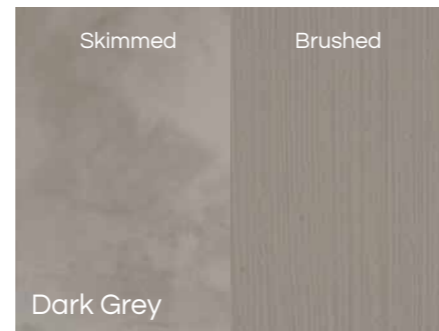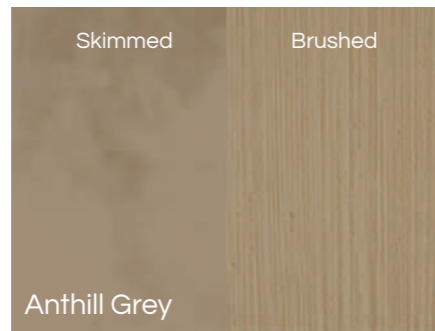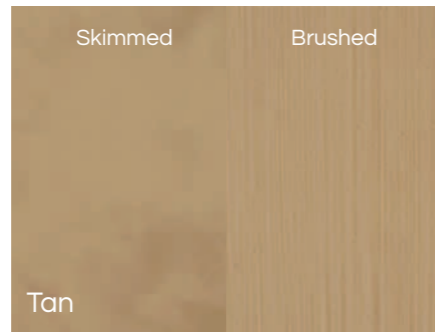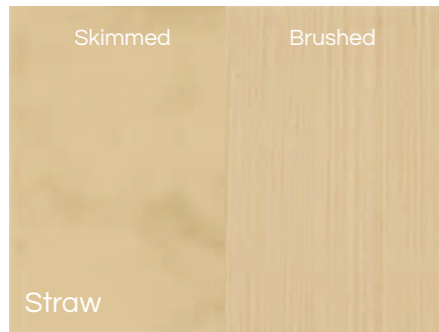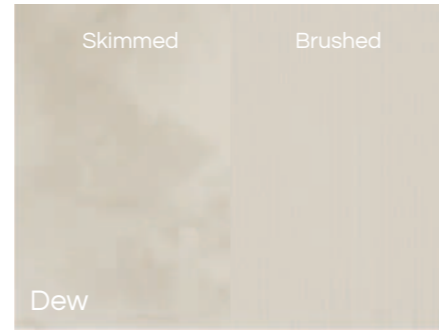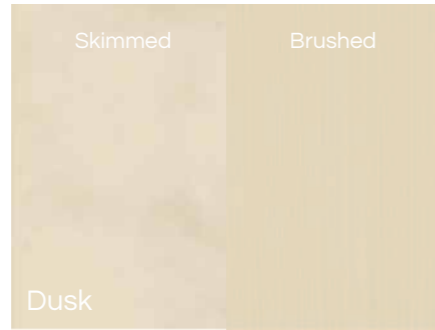

CemCote Skimmed custom colour

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.


SATINCRETE

DECORATIVE INTERIOR COLOURED PLASTER



SatinCrete Dolphin Grey

The colours depicted are a guide only and Concrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

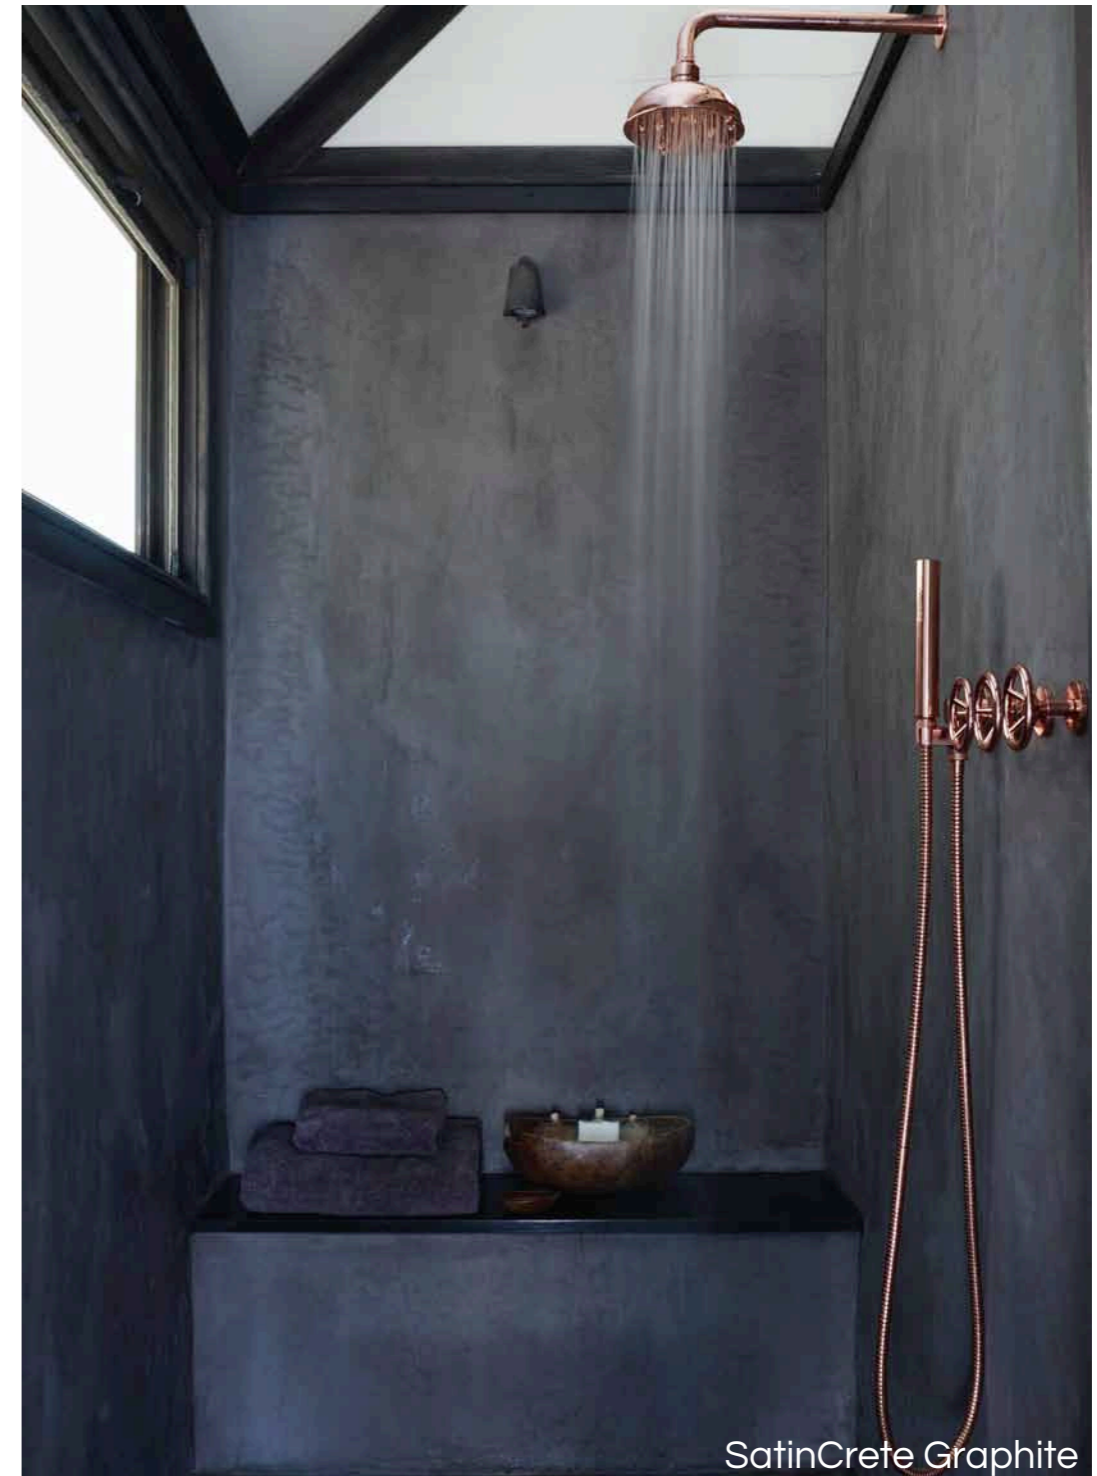

SatinCrete Graphite

SatinCrete is a 2 - 3mm pigmented, cement-based decorative plaster that creates a smooth, coloured finish for interior use only.

SUITABLE SURFACES

Wood floated plaster. Fibre cement board, new dry walling, previously painted surfaces & polystyrene all need to be primed with CemBond & coated with Cemcrete's EIFS BaseCoat or BaseCoat Paste.

FINISH

Smooth, sponge, brush or combed.

THICKNESS

2 - 3mm.

APPLICATION

Trowel-on.

CURING

Initial set: 1.5 - 2 hours. Leave to air cure for at least 24 hours before moist curing with a light mist spray of water at least 3 times during the day. Always spray from bottom to top to avoid water run marks. Allow to dry for at least 3 days before sealing. The moisture in the substrate must be less than 5% prior to sealing.

PACKAGING

20kg bag.

COVERAGE

Approximately 3 - 4m² per 20kg bag.




BENEFITS

- Stunning interior mottled wall coating
- Ideal for bathroom walls, including shower walls
- Once sealed, easy to clean and maintain due to its smooth finish
- Versatile application: can be applied to counter tops and vanities




COUNTERTOP / VANITY

BUILT-IN SEATING, COUNTER & WALL
SatinCrete Clay

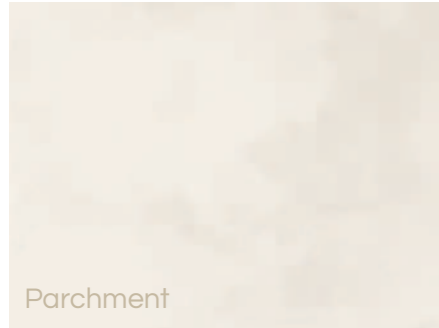


Parchment

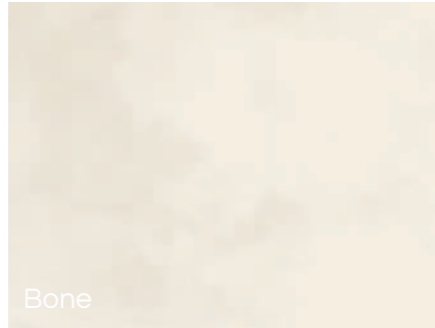


Bone




Mercury Grey

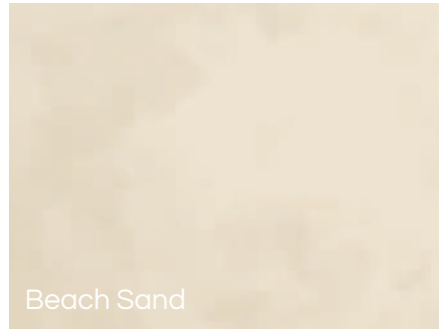

Beach Sand

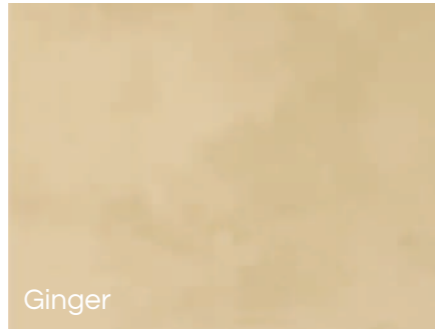

Ginger

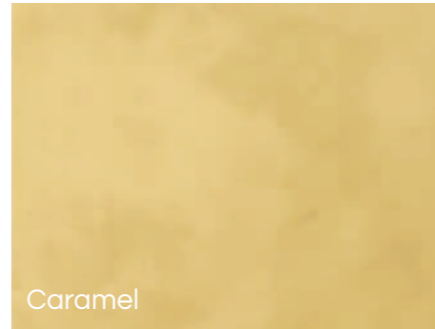


Caramel




Taupe




Cocoa

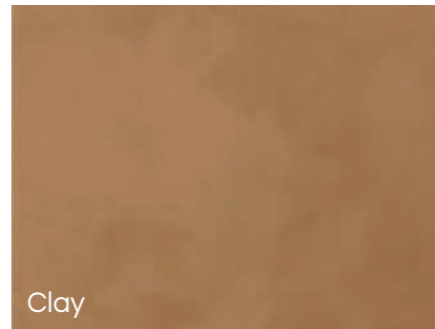


Clay

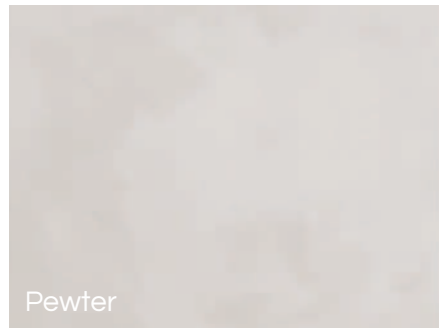


Pewter

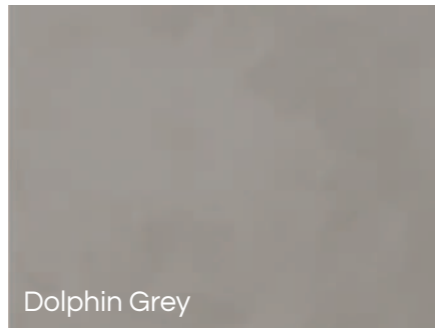

Dolphin Grey

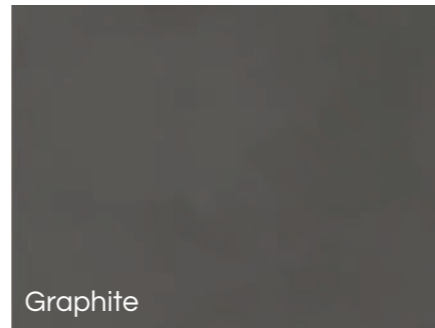

Graphite

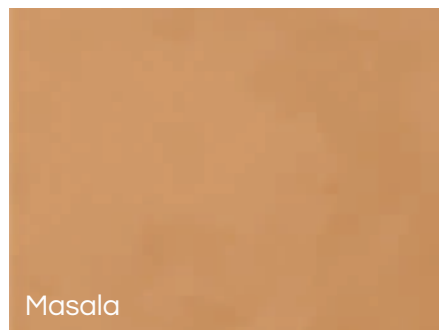

Masala

Did you know

Like many of our products, SatinCrete is very versatile and can be used to coat counters, artwork, showers and even baths.



SatinCrete Pewter

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



HEAD OFFICE

Showroom & Warehouse
8 Telford Street
Industria
(011) 474 2415
info@cemcrete.co.za

GAUTENG

Johannesburg Showroom
227 Jan Smuts Avenue
Parktown North
(011) 447 3149
jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park
26 Jakaranda Street
Centurion
(012) 653 6808
pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse
Unit 3 Eagle Park
cnr Bosmansdam & Omuramba Roads
Montague Gardens
(021) 555 1034
cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.

CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes
as *unique* as you are.