



ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

POOL COPINGS

FINISHES FOR CREATING POOL COPINGS

COLOUR HARDENER

DRY-SHAKE SCREED FLOOR FINISH



Colour Hardener Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



Colour Hardener House Blend

A granolithic concrete material that is floated into fresh screed or concrete which colours, strengthens & creates durable surfaces for concrete floors. It is a special blend of cement incorporating very hard-wearing aggregates, light fast pigments & additives which set rock-hard.

SUITABLE SURFACES

New / fresh interior & exterior concrete or screed base.

FINISH

Steel trowel to a smooth finish. Can be textured, stamped or rolled to obtain different tiled or paved effects.

THICKNESS

Depending on screed design - colour penetrates 2 - 3mm into screed.

APPLICATION

Sprinkle-on & trowelled.

CURING

Leave to air cure for 1 day after completion. Damp down with water twice daily for 7 days. Allow to dry for a minimum of 14 days before sealing.

PACKAGING

20kg bag.

COVERAGE

Approximately 5m² per 20kg bag.



COUNTERTOPS
Colour Hardener House Blend

POOL COPINGS
Colour Hardener White

BENEFITS

- Suitable for interior & exterior floors
- Suitable for domestic or commercial projects
- Colours concrete to a depth of 2 - 3mm (no risk of colour being rubbed off or abraded)
- Extremely durable (dependent on screed mix and curing)
- Can be used in conjunction with SuperScreed (10 - 20mm) where there are height restrictions
- Can be imprinted




CUSTOM PANELS
Colour Hardener Grey

IMPRINTING
Colour Hardener Chai Latte



COLOUR HARDENER | COLOUR RANGE

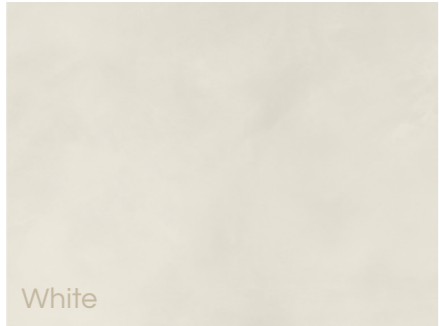

White




Vanilla Bean



Stone



Cobble Milk

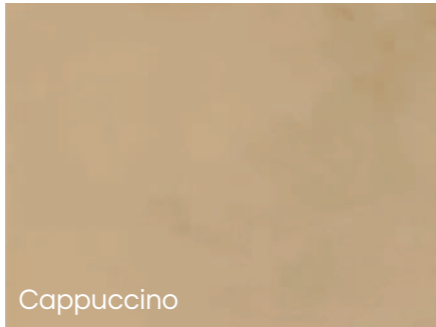


Cappuccino




Ochre




Ivory

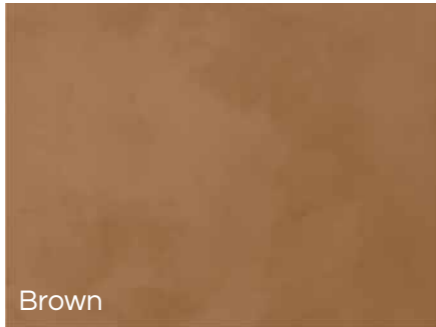


Brown

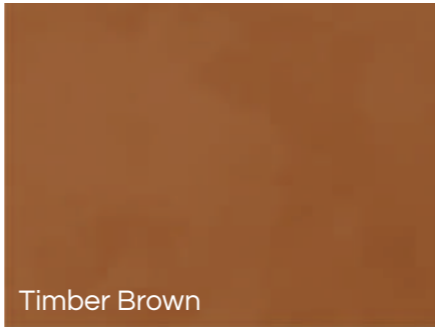

Timber Brown

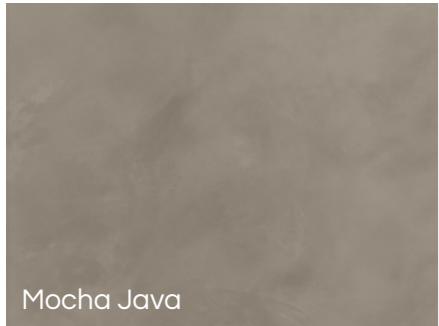

Mocha Java

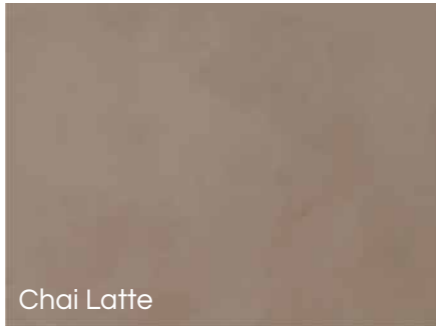


Chai Latte



Espresso



Grey

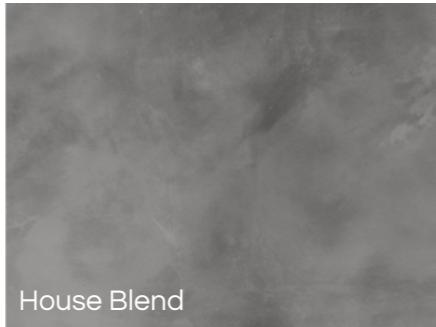

House Blend



Slate



Did you know

Colour Hardener floors should be designed with expansion / control joints incorporated into them, which will minimize the risk of large unsightly cracks when subjected to large changes in temperature, soil or foundation movement etc. Panel sizes should be as symmetrical as is possible and should not exceed 9m².

Colour Hardener Cobble Milk

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.




DecoCrete Greystone & ColourCem Black

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

DECOCRETE

SHAPEABLE TEXTURED PLASTER

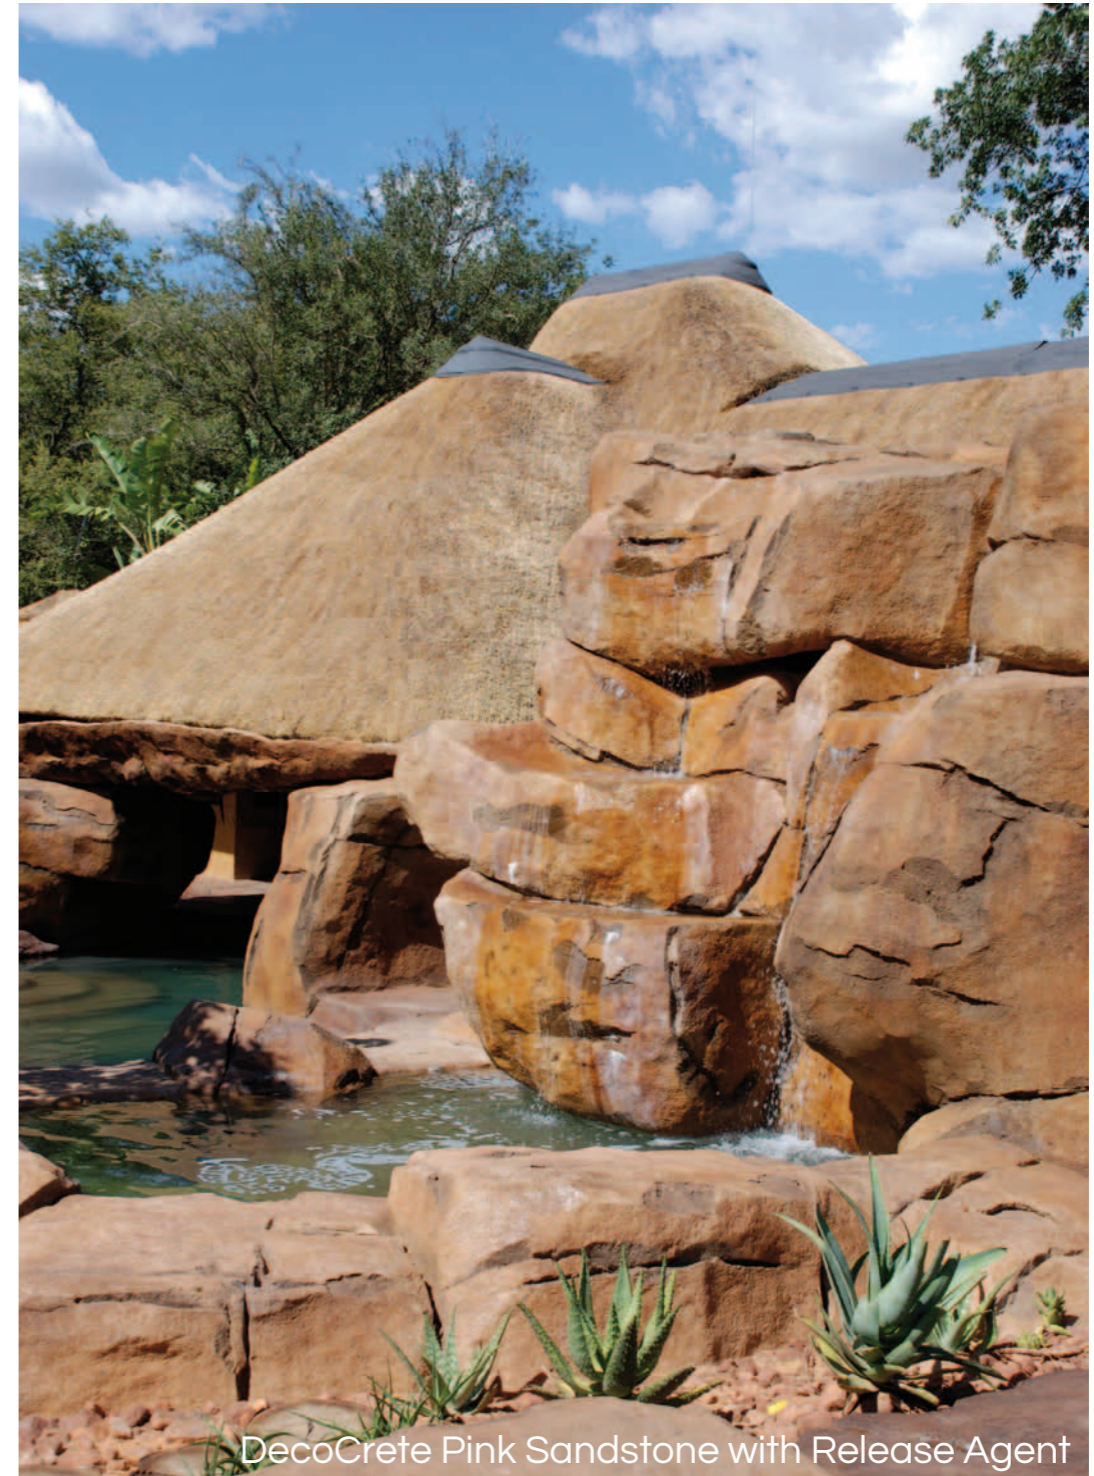

DecoCrete Pink Sandstone with Release Agent

A coloured, cement-based material formulated to be plastered to excessive thicknesses, but does not slide or shrink and dries rock-hard. A textured shaping system for the creation of artistic finishes, such as rock features, imitation brick walls and pool copings.

SUITABLE SURFACES

Shaped wire mesh (incorporating CemForce), interior & exterior concrete or screed base, interior & exterior wood or steel floated plaster, shaped polystyrene.

FINISH

Steel floated to a smooth finish. Textured to obtain different effects, can be carved with patterns or be imprinted.

THICKNESS

5 - 30mm per coat. When application is to be thicker than 10mm, the material can be pre-mixed with clean river sand to add bulk and texture.

APPLICATION

Steel trowel, hand packed, sponge finished and various other methods.

CURING

Cure by wetting with clean water 3 times on the day following the day of application to ensure hardness & durability. If Release Agent - Pigmented is used, the surface must be washed down after 72 hours curing time & subsequently cured by wetting with clean water.

PACKAGING

40kg bags.

COVERAGE


Approximately 1m² if applied 10mm thick.



FEATURE WALL - CARVING
DecoCrete Greystone



POOL COPING
DecoCrete Greystone with ColourCem Black

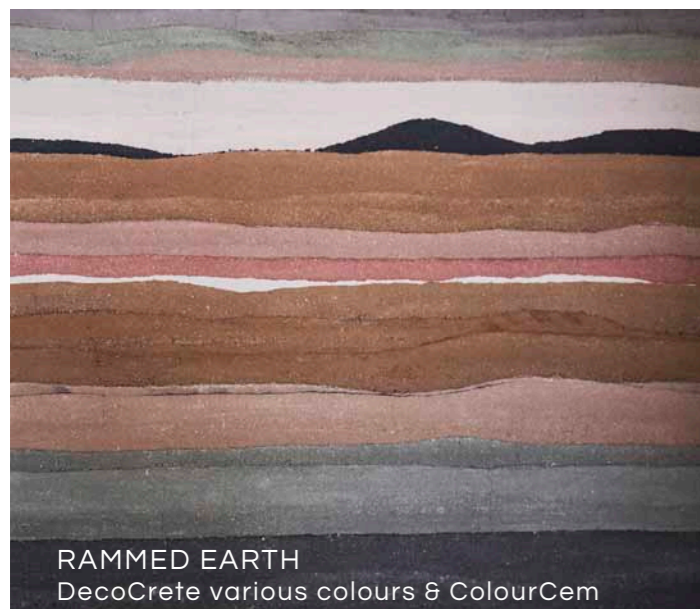

RAMMED EARTH
DecoCrete various colours & ColourCem



WALL CARVING
DecoCrete Sandstone



Machado




Sandstone




Pink Sandstone



Brown

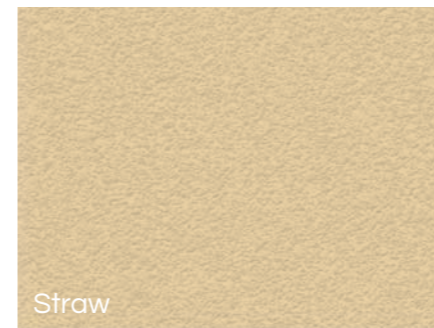

Straw

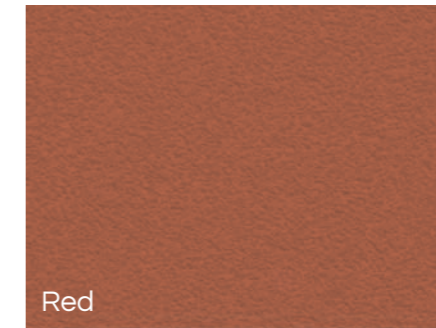

Red



Camel



Greystone

BENEFITS

- Slow setting gives time to work & manipulate the material in-situ
- For use on interior & exterior walls, floors & copings
- Abrasive resistance & coloured throughout
- UV & alkali proof
- Ideal for water features as it can continually be exposed to water

Did you know

DecoCrete can be applied to polystyrene shapes to provide speciality items such as floating rocks or crocodile heads for fish to hide under, or to create rock work or such to compliment dam/pond presentation.



RenoCrete Cloud Grey - Smooth Application

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

RENOCRETE

VERSATILE SMOOTH / TEXTURED OVERLAY



RenoCrete Driftwood - Knock-Down Application

RenoCrete is a pre-coloured spray or trowelled-on cement-based polymer modified two-part resurfacing systems. RenoCrete beautifies existing surfaces while achieving good compressive, tensile & flexural strength.

SUITABLE SURFACES

Interior & exterior concrete or screed base such as driveways, patios, walkways, pool surrounds, etc.

FINISH

Sprayed-on / Trowelled-on / Knock-down.

THICKNESS

2 - 3mm.

APPLICATION

Spray-on with a hopper gun or steel trowelled.

CURING


Approximately 3 - 5m² per 20kg bag.

PACKAGING

20kg bag.

COVERAGE

Approximately 3 - 5m² per 20kg bag.


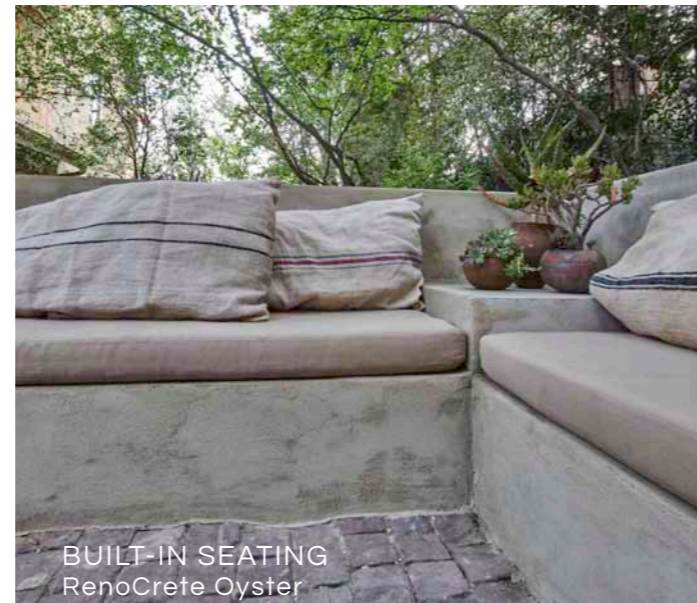


POOL SURROUND
RenoCrete Cloud Grey

BUILT-IN SEATING
RenoCrete Oyster



BENEFITS

- Beautifies existing concrete surfaces
- Achieves good compressive, tensile & flexural strength with abrasion resistance
- Suitable for redressing concrete; driveways, walkways, outside patios, pool surrounds & balconies
- Available in multiple finishes, from smooth trowelled to sprayed-on & knock-down
- Interior & exterior use
- UV stable

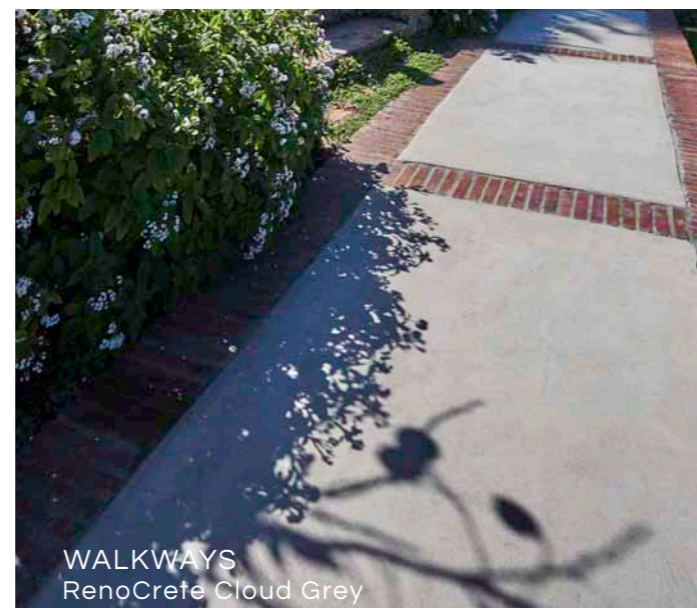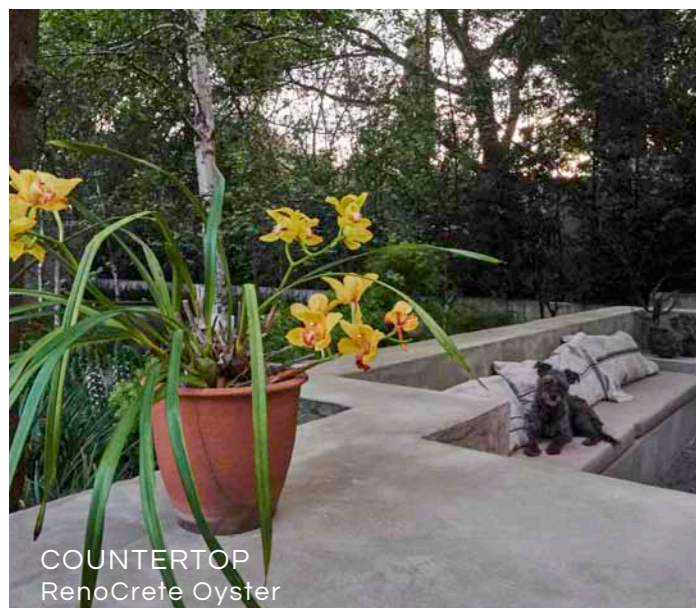


COUNTERTOP
RenoCrete Oyster

WALKWAYS
RenoCrete Cloud Grey

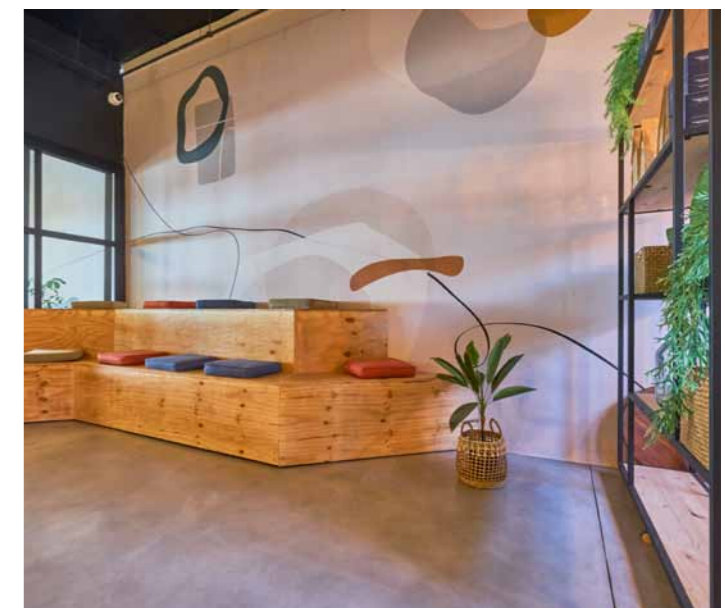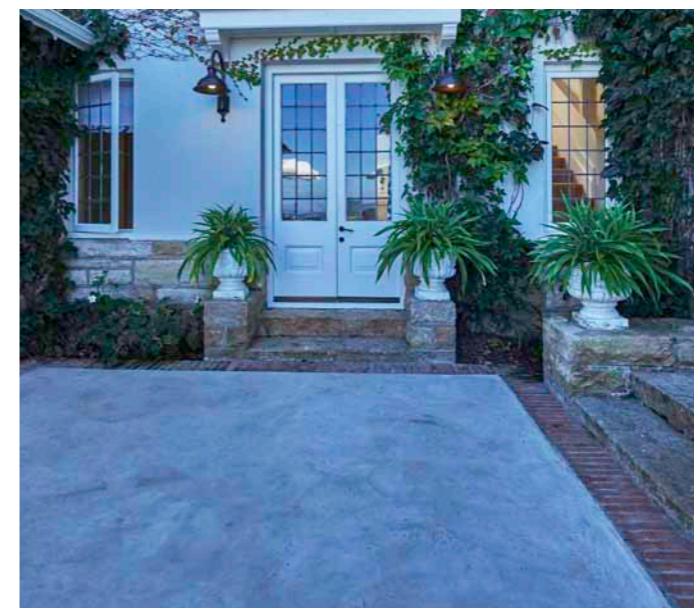


RENOCRETE | COLOUR RANGE

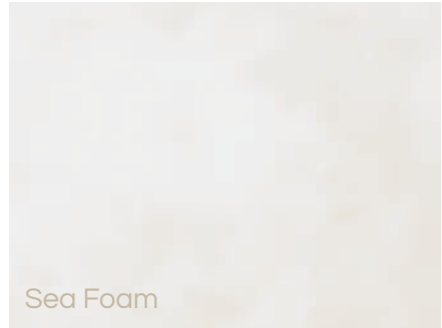


Sea Foam




Cuttlefish

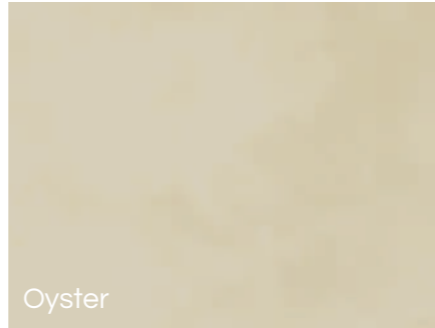


Oyster

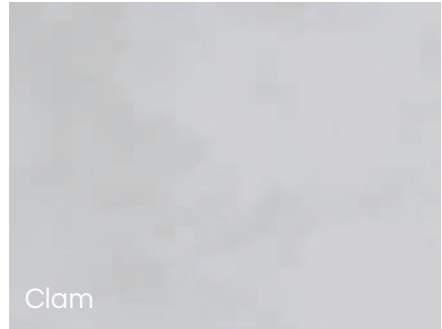


Clam

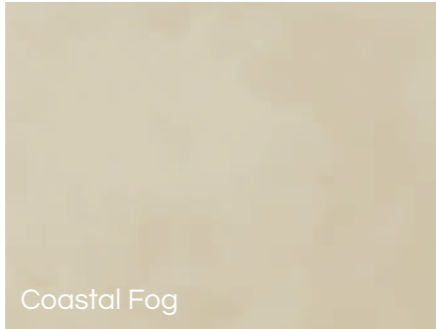

Coastal Fog

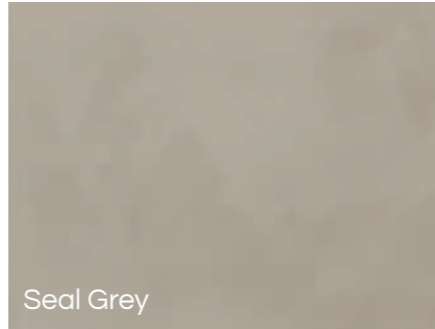


Seal Grey

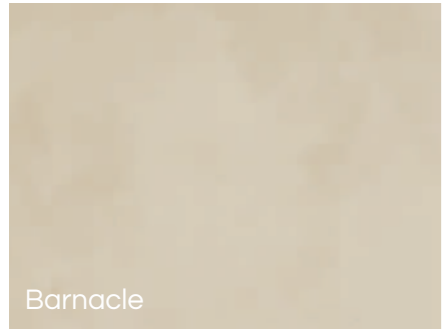


Barnacle




Cloud Grey

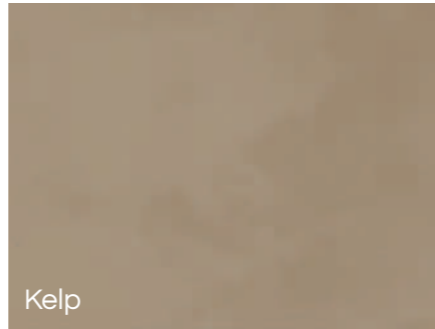


Kelp

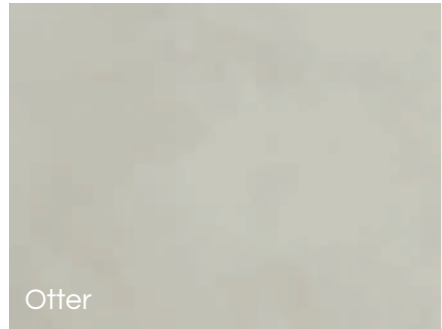


Otter

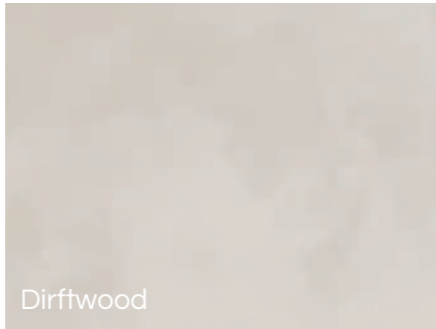


Dirftwood

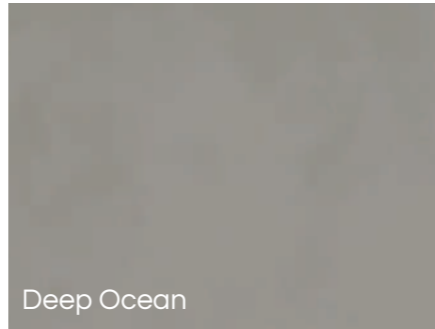

Deep Ocean

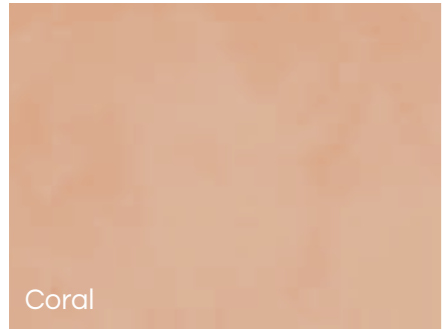

Coral

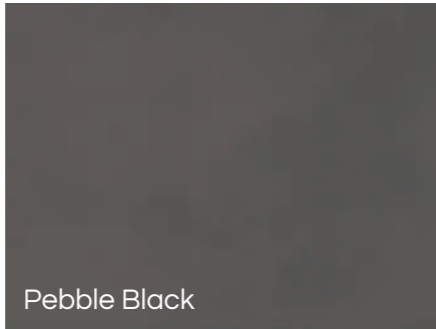

Pebble Black



Mollusc



RenoCrete Cloud Grey

Final colours for the spray and knock-down applications will vary from the smooth trowelled application. Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

EXPOSED AGGREGATE

DECORATIVE AGGREGATE COATING



Exposed Aggregate Tamarind

The colours depicted are a guide only and Cemere® recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



Exposed Aggregate Chia Seed

Exposed Aggregate mix is a thin decorative stone cementitious bound system. Ideally suited for external residential & commercial applications for example al fresco areas of retail shops, restaurants & parks, etc. where minimum maintenance is required with a decorative finish.

SUITABLE SURFACES

Suitable for external floors such as patios, walkways & driveways, bomas, pool surrounds, shower floors, etc.

FINISH

Rough textured exposed stone.

THICKNESS

8mm.

APPLICATION

Trowel-on and washed.

CURING

The panels should be kept moist or wet for at least 2 days after application.

PACKAGING


20kg bag.

COVERAGE


20kg should cover approximately 0.8m² at 8mm thick.




Tamarind

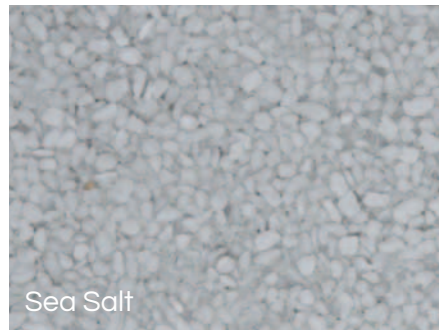

Sea Salt

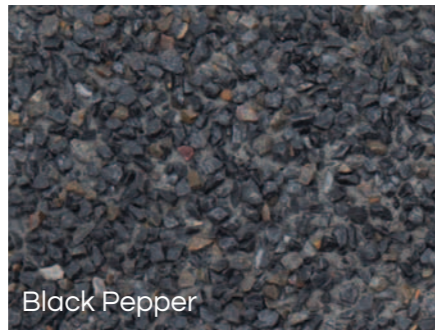

Black Pepper

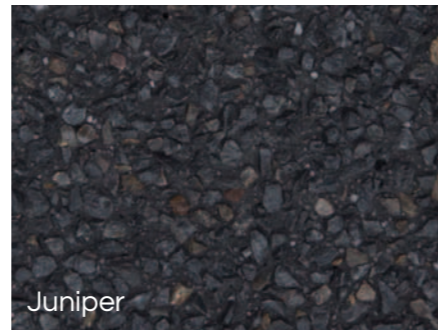

Juniper




Caraway




Cumin



Mustard

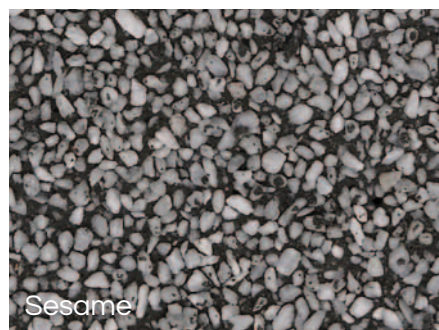

Sesame

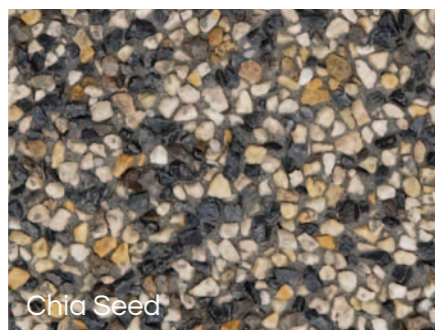

Chia Seed



Poppy Seed




BENEFITS

- Aesthetically pleasing
- Easy to clean & maintain
- Durable; abrasion & impact resistant
- Non-slip & UV stable
- Custom colours available on request

Did you know

Custom colours are easily achieved with the variety of aggregates available. You can also seed larger aggregates for a unique final finish.

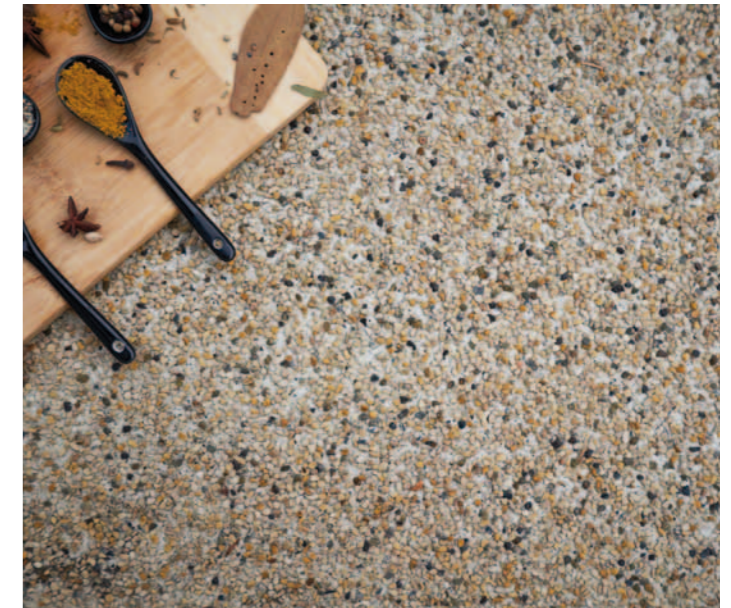

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



HEAD OFFICE

Showroom & Warehouse
8 Telford Street
Industria
(011) 474 2415
info@cemcrete.co.za

GAUTENG

Johannesburg Showroom
227 Jan Smuts Avenue
Parktown North
(011) 447 3149
jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park
26 Jakaranda Street
Centurion
(012) 653 6808
pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse
Unit 3 Eagle Park
cnr Bosmansdam & Omuramba Roads
Montague Gardens
(021) 555 1034
cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.

CEMCRETE®

Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes
as *unique* as you are.