

ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings



RENOCRETE

VERSATILE SMOOTH / TEXTURED OVERLAY


RENOCRETE

VERSATILE SMOOTH / TEXTURED OVERLAY



RenoCrete Cloud Grey - Smooth Application

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

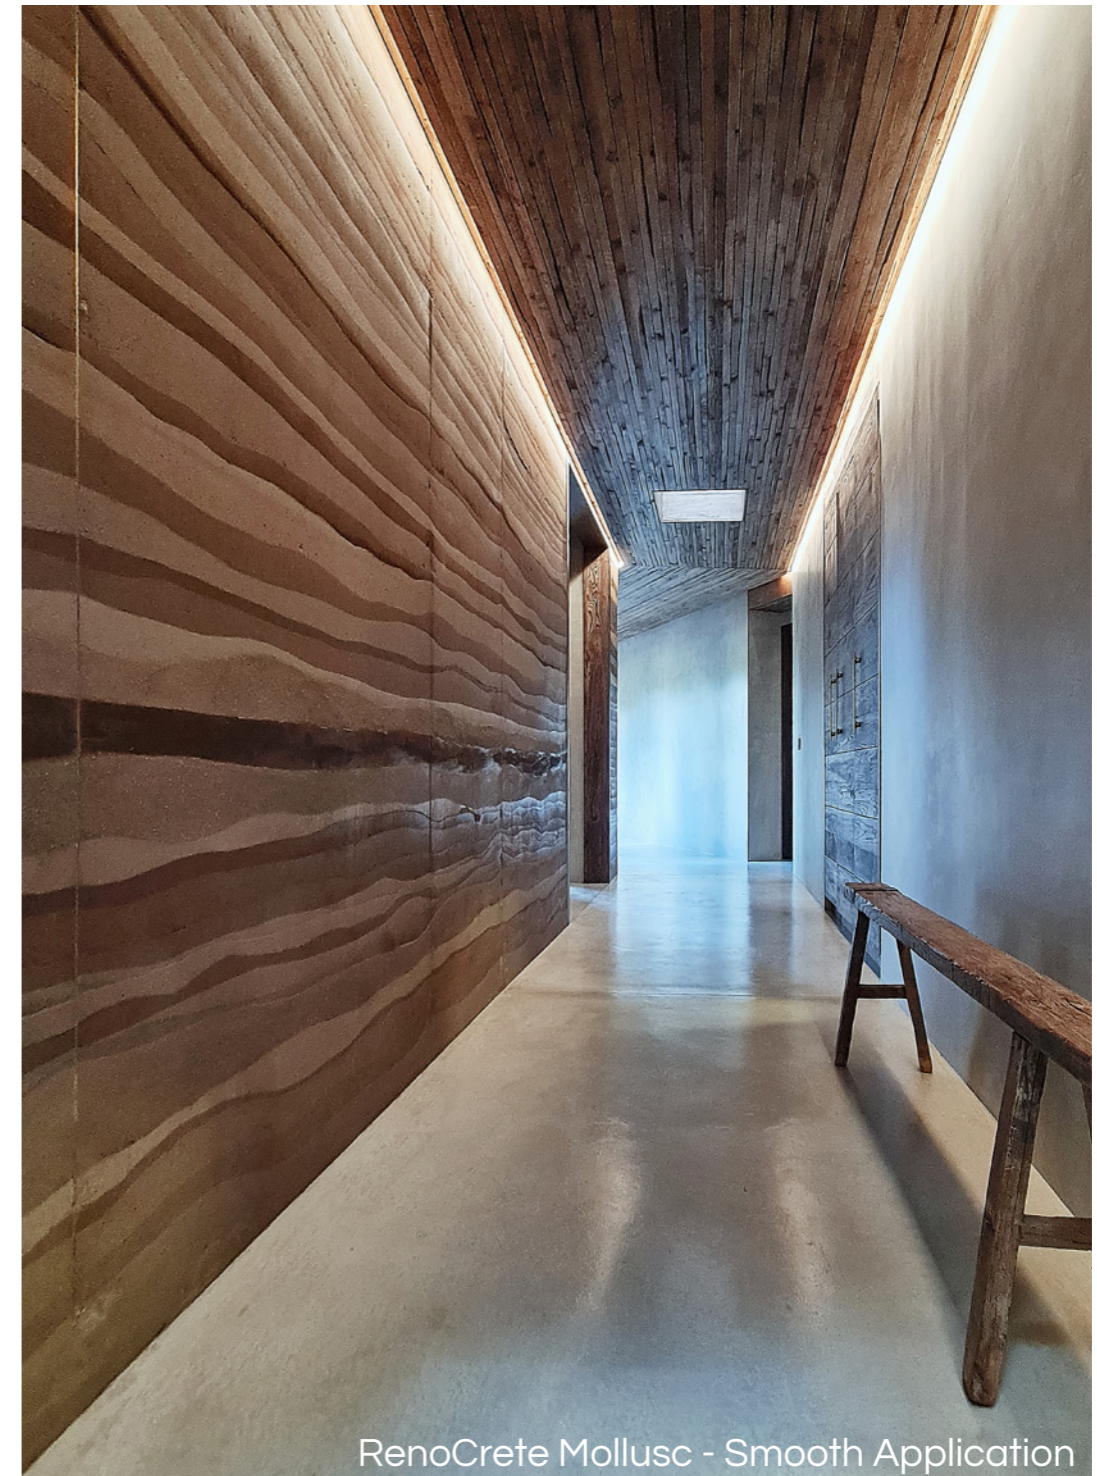

RenoCrete Mollusc - Smooth Application

A pre-coloured spray-on or trowel-on cement-based polymer modified two-part resurfacing system. RenoCrete beautifies existing surfaces (wall, floor and other) while achieving good compressive, tensile & flexural strength.

SUITABLE SURFACES

Interior & exterior concrete substrates (floors, pavements, walkways, driveways, pool surrounds & balconies).

FINISH

Sprayed-on / Trowelled-on / Knock-down.

THICKNESS

2 - 3mm.

APPLICATION

Spray-on with a hopper gun or steel trowel.

CURING

In hot dry conditions cure completed work by mist spraying with water 3 times the following day. In light commercial applications it is recommended to densify after 7 days using Cemcrete's Potassium Densifier, prior to sealing.

PACKAGING

20kg bag.




COVERAGE

Approximately 3 - 5m² per 20kg bag, depending on the finish, surface profile, thickness & nozzle settings.






BENEFITS

- Beautifies existing concrete surfaces
- Achieves good compressive, tensile & flexural strength with abrasion resistance
- Suitable for redressing concrete; driveways, walkways, outside patios, pool surrounds & balconies
- Available in multiple finishes, from smooth trowelled to sprayed-on & knock-down
- Interior & exterior use
- UV stable

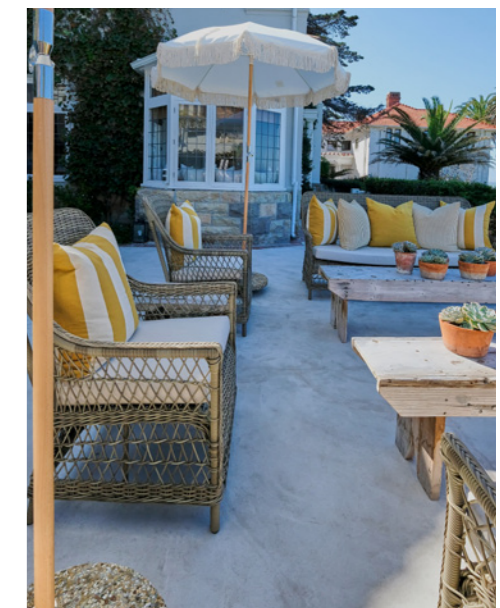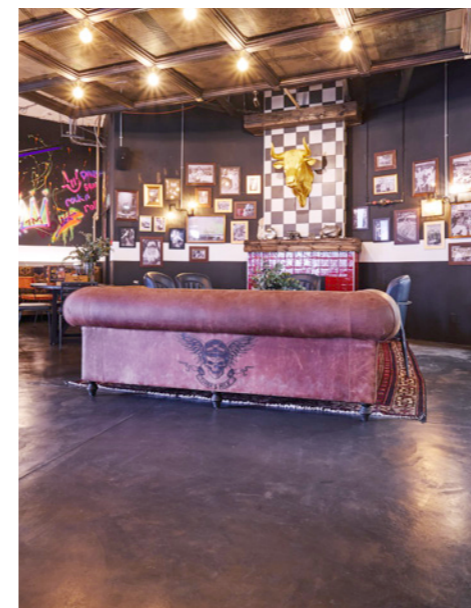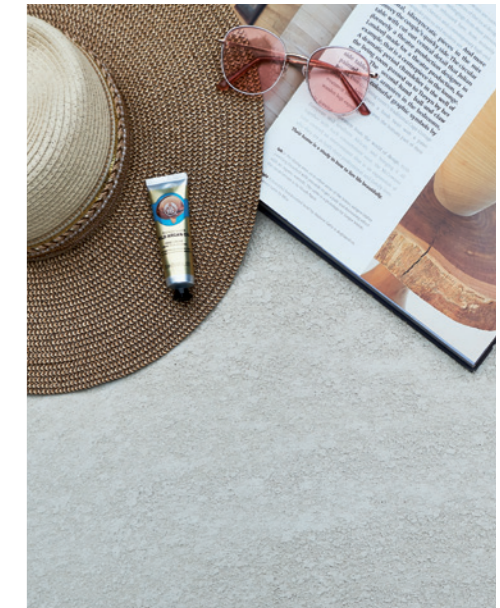


COUNTERTOP
RenoCrete Seal Grey

STAIRCASE
RenoCrete Pebble Black




RENOCRETE | COLOUR RANGE

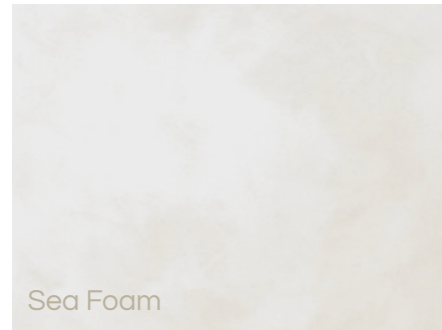


Sea Foam




Cuttlefish

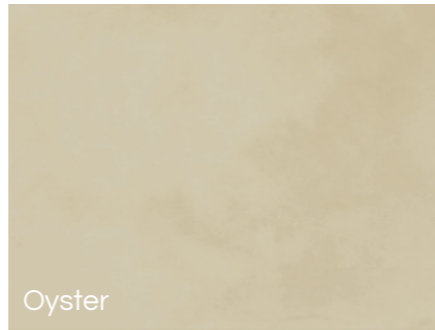


Oyster

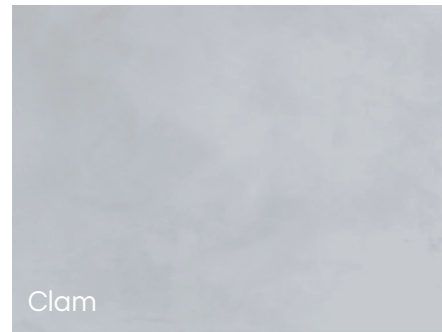


Clam

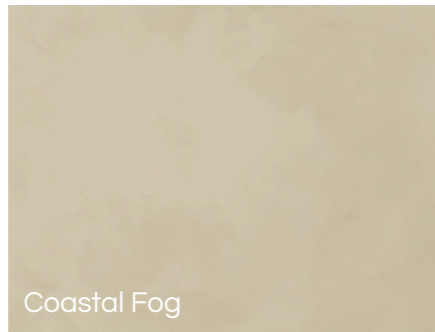


Coastal Fog

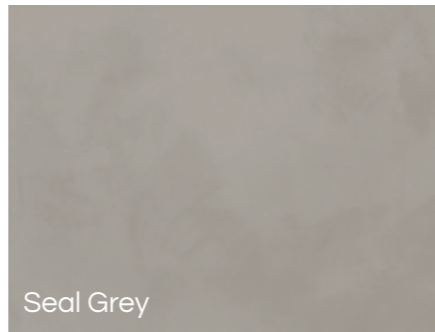


Seal Grey

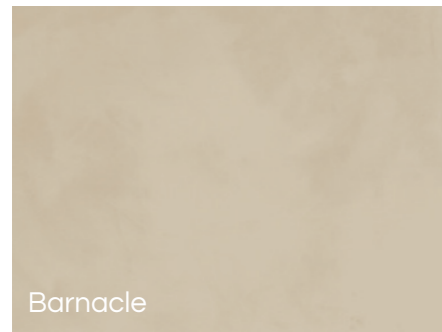


Barnacle

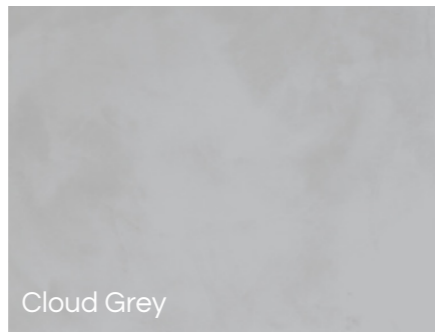


Cloud Grey

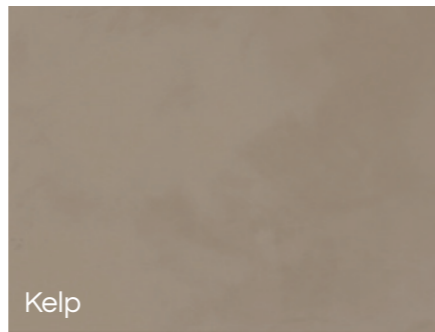


Kelp

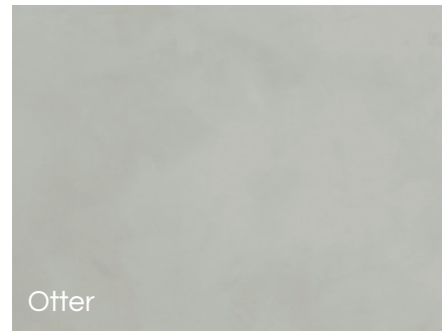


Otter

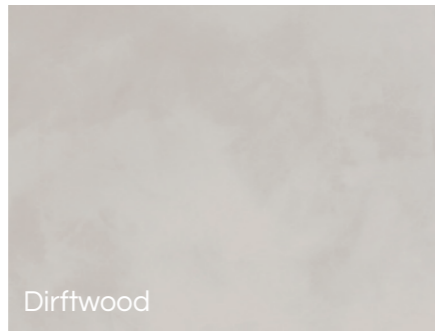


Dirftwood

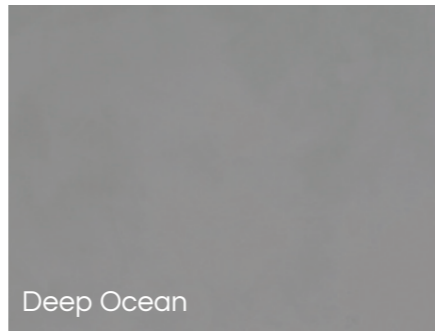


Deep Ocean

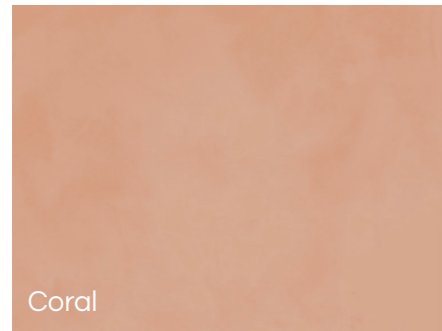

Coral

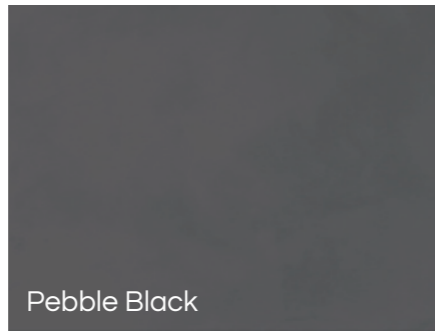

Pebble Black

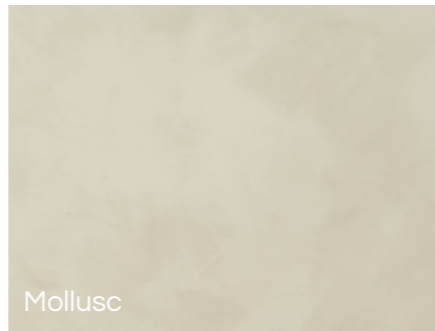

Mollusc



Final colours for the spray and knock-down applications will vary from the smooth trowelled application. Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

RenoCrete Pebble Black
The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



HEAD OFFICE

Showroom & Warehouse
8 Telford Street
Industria
(011) 474 2415
info@cemcrete.co.za

GAUTENG

Johannesburg Showroom
227 Jan Smuts Avenue
Parktown North
(011) 447 3149
jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park
26 Jakaranda Street
Centurion
(012) 653 6808
pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse
Unit 3 Eagle Park
cnr Bosmansdam & Omuramba Roads
Montague Gardens
(021) 555 1034
cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.

CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes
as *unique* as you are.