



CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

AFFORDABLE HOUSING

Cost-effective wall coatings for mass housing projects

KHOZI COAT

One coat acrylic PVA

Cemcrete's Khozi Coat is a one coat PVA acrylic paint suitable for interior and exterior surfaces. It is alkali resistant and is designed as a one-coat application for existing or newly plastered surfaces, cement bricks or building blocks.

BENEFITS

- One-coat application
- Good adhesion
- Outstanding hiding power
- Superior obliterations & spread ability
- Masks minor plastering defects
- Alkali resistant

SPECIFICATIONS

Suitable surfaces	Can be applied to exterior or interior walls of industrial, commercial or domestic buildings Onto surfaces primed with Cemcrete's CemBond according to the datasheet, or unprimed concrete, cement plaster, brickwork, building boards and suitably primed wood, metal, fibre cement and gypsum plaster
Finish	Smooth
Thickness	Approximately 60 microns depending on surface profile and porosity
Application	Brush-on, roll-on or spray-on
Packaging	20 litre container (minimum of 300 containers per order)
Coverage	Approximately 4 - 7m ² / litre/ coat
Curing	6 hours if required, touch dry in around 2 hours
Colour/s	Available in 9 colours

INTENDED FOR USE WITH

CemBond 1, 5 & 20 litre containers - 8m² / litres for 2 coats






TOOLS NEEDED

Brush
Roller
Airless sprayer

SUPPORTING CEMCRETE PRODUCTS

StippleCrete
PlasterCote

KHOZI COAT | COLOUR RANGE

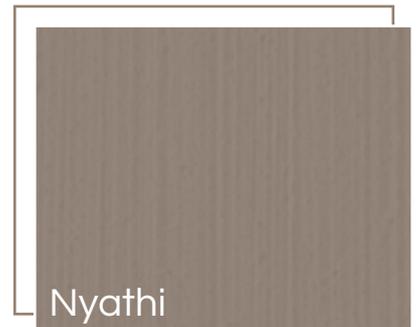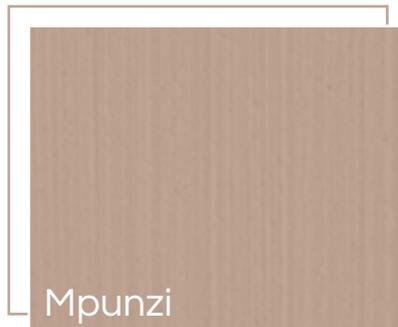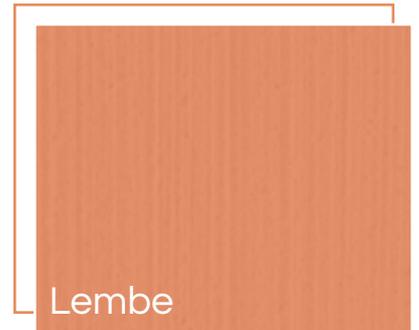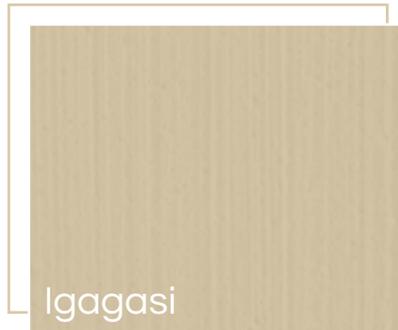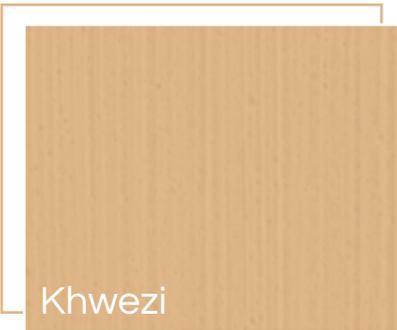

STIPPLECRETE

Direct to concrete and brick coating

StippleCrete provides an exceptionally long-lasting, weatherproof, economic coating for fairface brick-work or concrete in one coat.

BENEFITS

- Exterior and interior use
- Integrally coloured to eliminate painting
- Low-cost weatherproofing
- Decorating of affordable housing
- Plaster and colour all-in-one

SPECIFICATIONS

Suitable surfaces	Flush brickwork or blockwork, off-shutter concrete and scratched cement plaster – walls & ceilings
Finish	Textured
Thickness	Min application thickness: 1mm Max application thickness: 2mm
Application	Brush-on
Packaging	40kg bags (minimum of 300 bags per order)
Coverage	Approximately 14 - 18m ² per 40kg bag, depending on the coarseness of the texture and suction Less coverage will be obtained on ceilings
Curing	Cure by wetting all completed work 3 times daily with clean water following the day of application to ensure hardness and durability
Colour/s	Available in 8 colours

INTENDED FOR USE WITH

CemBond 1, 5 & 20 litre containers - 8m² / litres for 2 coats (not on cement brick or block otherwise the mortar joints grin through. Mix just with water but follow the shade and protect from the sun

TOOLS NEEDED

Block-brush
Soft carpet brush
Broom

SUPPORTING CEMCRETE PRODUCTS

Khozi Coat
SiliconSeal



STIPPLECRETE | COLOUR RANGE

