

ICEMCRETE®

Manufacturers of Distinctive Decorative Coatings



CEMCOTE BRUSHED

Brush-on cement wall coating

A finely ground mixture of white Portland cement, pigments and chemicals. It is supplied in powder form requiring mixing with water on-site to produce a smooth, flowing coating which sets rock hard.

BENEFITS

- For interior and exterior use
- Brush-on or skim-on application
- Durable and weatherproof
- Interesting colour variation
- Wears well over time

SPECIFICATIONS

Suitable surfaces	Interior & exterior plastered or previously painted walls
Finish	Slightly textured when applied with a brush
Thickness	1.6 - 2.5mm
Application	Brush-on & trowel-on
Packaging	5 & 25kg container
Coverage	1 - 1.1kg's per m ² or 25 - 30m ² (2 coats) per 25kg drum, depending on surface texture and porosity
Curing	Initial set - 1 hour The completed work should be allowed to air cure for 24 hours after application, before mist spraying the entire wall from bottom to top (to prevent run marks) evenly at least twice during the day thereafter The moisture in the substrate must be less than 5% prior to sealing
Colour/s	Available in 14 colours




INTENDED FOR USE WITH

CemBond mixed 1:3 with water to prime the wall
CemBond mixed 1:5 with water to mix with the first coat of CemCote

Relevant sealers as required



CEMCOTE BRUSHED | COLOUR RANGE

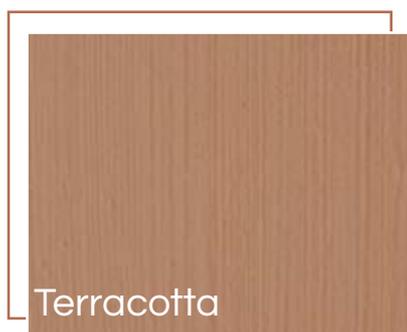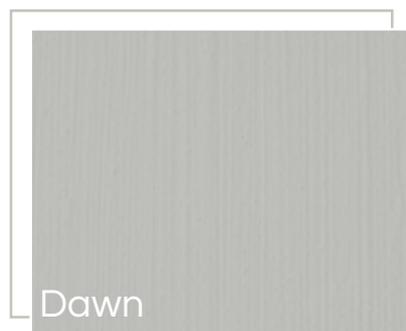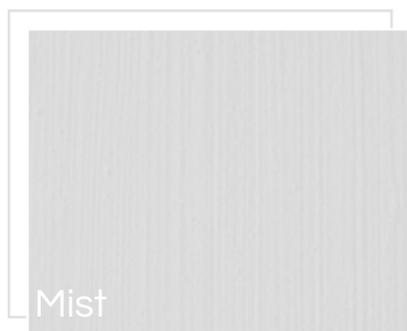

CEMCOTE BRUSHED | USES


CemCote Brushed Anthill Grey



CemCote Brushed Dark Grey



CemCote Brushed Dark Grey Ceiling

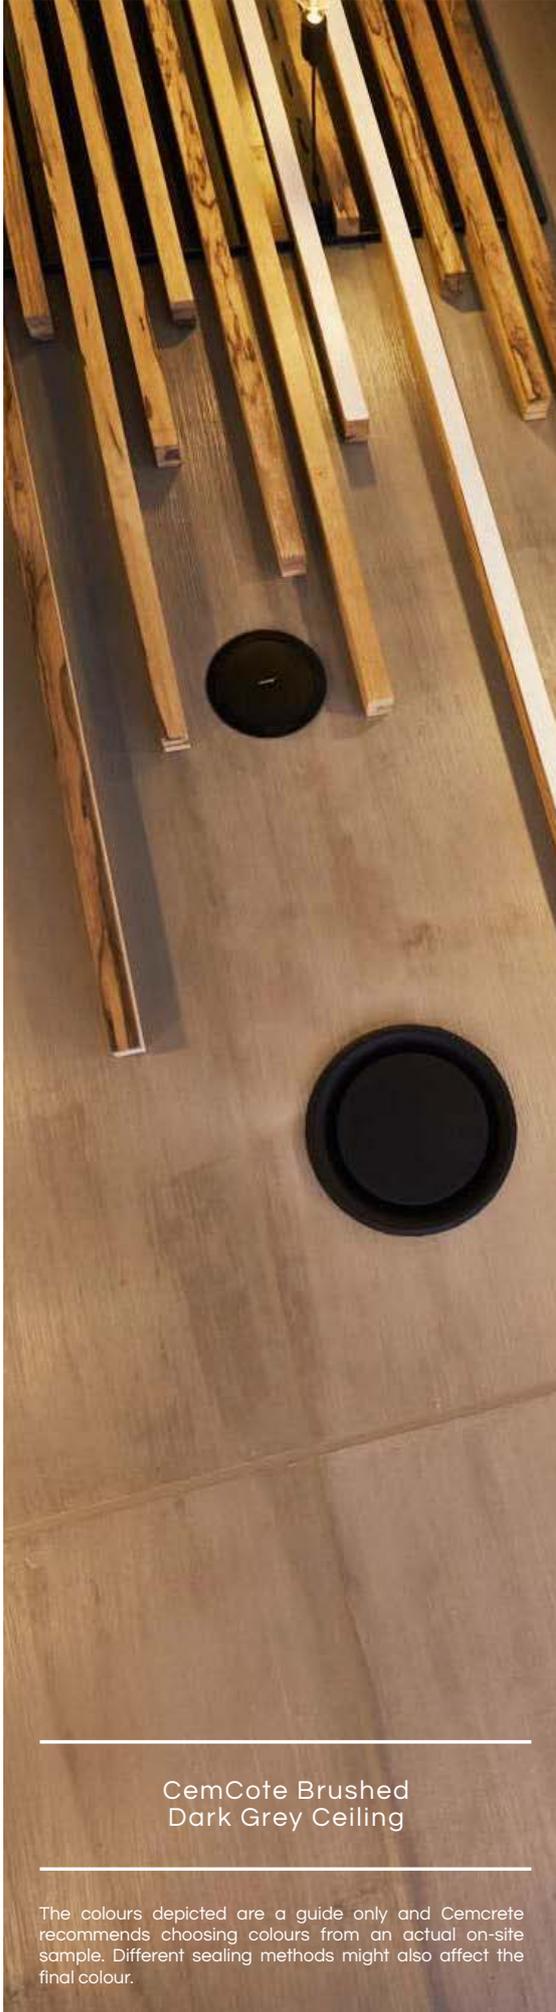

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

CemCote Brushed White

