

ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

2
USE LIFT

1



0

CEMCOTE SKIMMED

Trowel-on cement wall coating

A finely ground mixture of white Portland cement, pigments and chemicals. It is supplied in powder form requiring mixing with water on-site to produce a smooth, flowing coating which sets rock hard.

BENEFITS

- For interior and exterior use
- Brush-on or skim-on application
- Durable and weatherproof
- Interesting colour variation
- Wears well over time

SPECIFICATIONS

Suitable surfaces	Interior & exterior plastered or previously painted walls
Finish	Smooth
Thickness	1.6 - 2.5mm
Application	Sponge & trowel-on
Packaging	5 & 25kg container
Coverage	1 - 1.1kg's per m ² or 25 - 30m ² (2 coats) per 25kg container, depending on surface texture and porosity
Curing	Initial set – 1 hour The completed work should be allowed to air cure for 24 hours after application The moisture in the substrate must be less than 5% prior to sealing
Colour/s	Available in 14 colours

INTENDED FOR USE WITH






FlexBond mixed 1:3 with water
Relevant sealers as required

NOTE: For exterior use, replace the FlexBond with CreteBond. Dilution ratios stay the same as for FlexBond.

YouTube tiny.cc/cemcoteskimmed



CEMCOTE SKIMMED | COLOUR RANGE

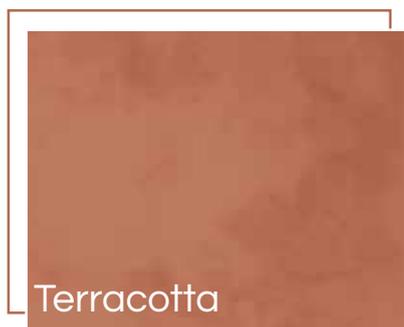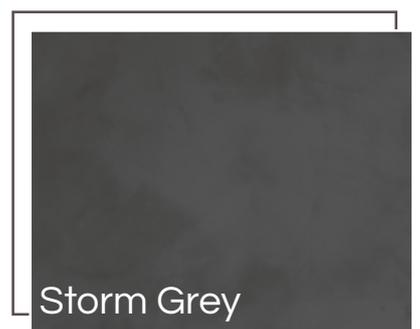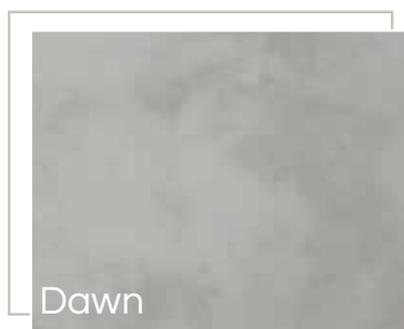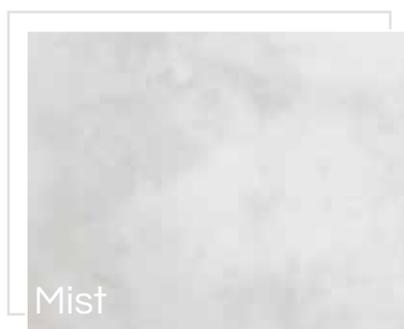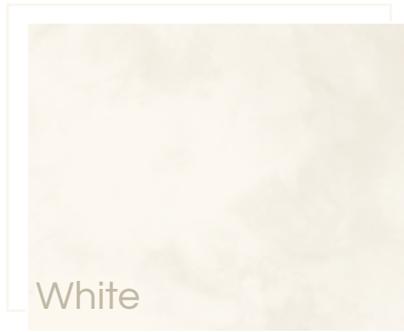



CemCote Skimmed Dark Grey

The colours depicted are a guide only and Cemcrete recommend choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

CEMCOTE SKIMMED | USES



CemCote Skimmed Dark Grey wall & basin

CemCote Skimmed Anthill Grey coated hollow core hardboard door



CemCote Skimmed Concrete Grey fire place



CemCote Skimmed Concrete Grey off-shutter panels

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.