



THIN SKIM-ON FLOOR & WALL COATING

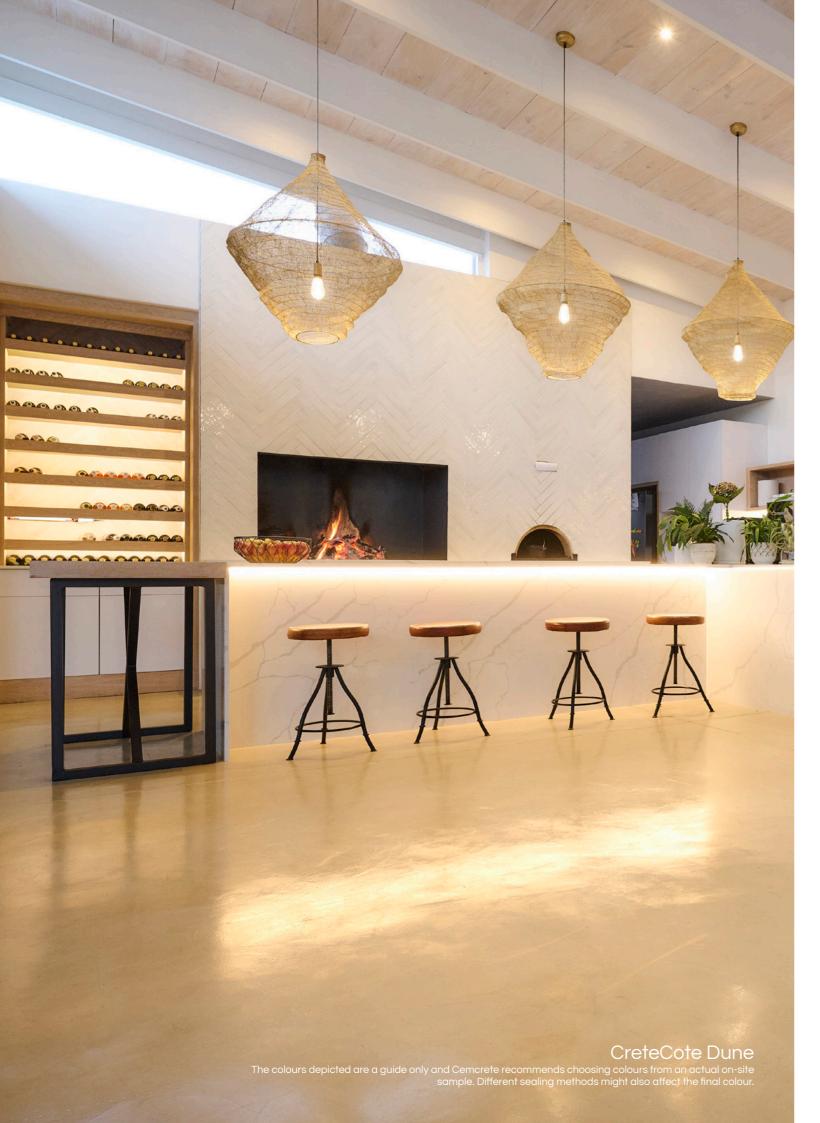

CRETECOTE THIN SKIM-ON FLOOR & WALL COATING

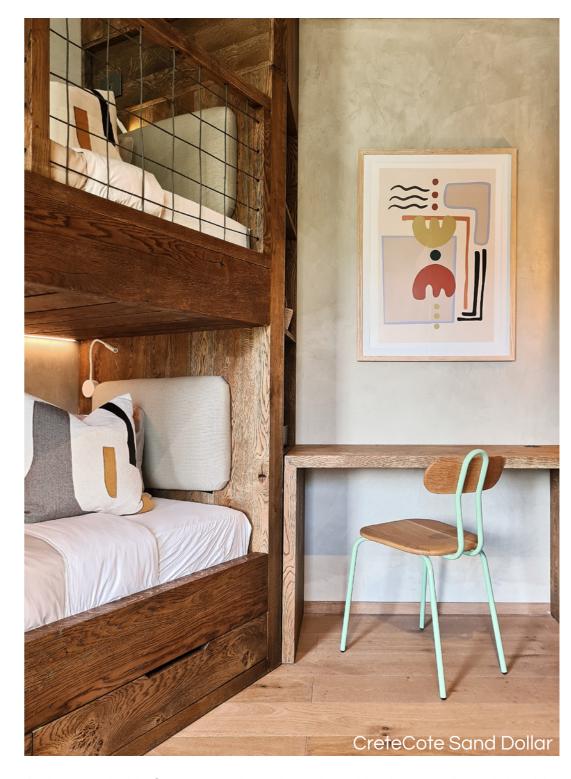

A pigmented, thin film cement-based coating which is versatile and durable. It is a two coat system which produces a 1.6mm smooth decorative finish suitable for application onto wood or steel floated concrete floor slabs and screeds, ceilings and plastered or previously painted walls. For interior and exterior walls, and interior floors only.

SUITABLE SURFACES

Interior & exterior walls as well as interior floors. New surfaces should be allowed to cure for at least 28 days.

Tiles - with the necessary preparation steps to ensure even suction 8 adhesion (refer to coating over tiles datasheet).

FINISH Smooth.

THICKNESS

Minimum 1.6mm (maximum 0.8mm per coat – 2 coat application).

APPLICATION

Sponge & trowel-on.

The completed work should be allowed to air cure for 48 hours before sealing. The moisture in the floor must be less than 5% prior to sealing.



CreteCote Powder (Part 1) 10kg paper bag CreteCote Catalyst (Part 2) 5L container CreteCote also available as a 15kg twin-pack drum

COVERAGE

8 - 10 m² per 10kg powder and 5L liquid combined.











CreteCote Nickel Grey








BENEFITS

- Thin skim-on coating perfect for renovations
 - Interesting colour variation
- Versatile application can be used for walls, ceilings, interior floors, counters & vanities
- Reaches a compressive strength of 35MPa after 28 days (this is solely dependent on the substrate)











CRETECOTE | COLOUR RANGE





