

THIN HIGH-STRENGTH SCREED

SUPERSCREED

THIN HIGH-STRENGTH SCREED

A 10 - 20mm high-strength, shrinkage compensated granolithic type screed mix.

SUITABLE SURFACES

New concrete, 8 old concrete surfaces that are at least 28 days old. Appropriate surface preparation is essential.

APPLICATION

Wood float or steel trowel.

FINISH

Steel trowel to a smooth finish, or textured, stamped or rolled to obtain different tiled or paved effects.

THICKNESS 10 - 20 mm.

CURING


Cure the floor with a fine mist spray for the next 3 days to ensure limited water loss. Refer to datasheet for final cure instructions with different application options.

PACKAGING 40kg bags.

COVERAGE

Approximately 0.9m² when applied at 10mm thick.

APPEARANCE / COLOUR(S) Grey.

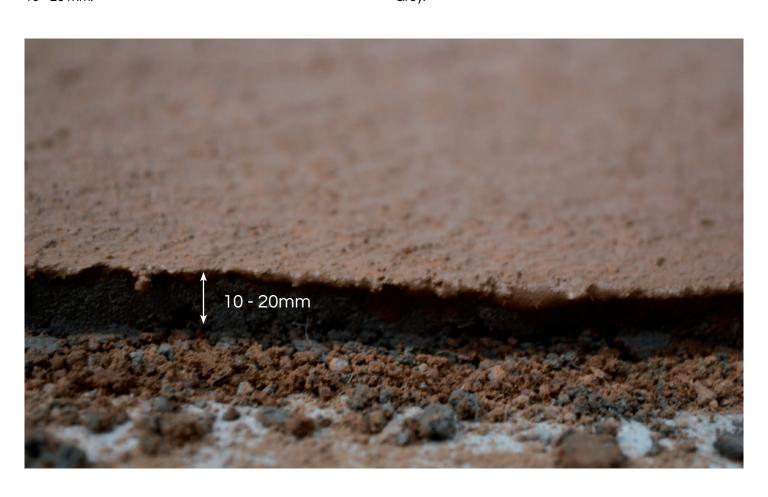

BENEFITS

- Can be used where height restrictions do not allow for a standard screed
- Can be used in conjunction with Colour Hardener to achieve a coloured cement floor finish
 - Can be used for rectifying imperfections in floor surfaces
- To provide a suitable surface for micro coatings (CreteCote), tiles, carpets and wooden flooring
 - Supplied in a single bag (cement component bagged separately in the same bag)



info@cemcrete.co.za www.cemcrete.co.za











HEAD OFFICE

Showroom & Warehouse & Telford Street Industria (011) 474 2415 info@cemcrete.co.za

GAUTENG

Johannesburg Showroom

227 Jan Smuts Avenue Parktown North (011) 447 3149 jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park 26 Jakaranda Street Centurion (012) 653 6808 pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse

Unit 3 Eagle Park cnr Bosmansdam & Omuramba Roads Montague Gardens (021) 555 1034 cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.



Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes as wou are.