


PRODUCTS



POOLCRETE

WHITE & COLOURED MARBLE POOL PLASTER

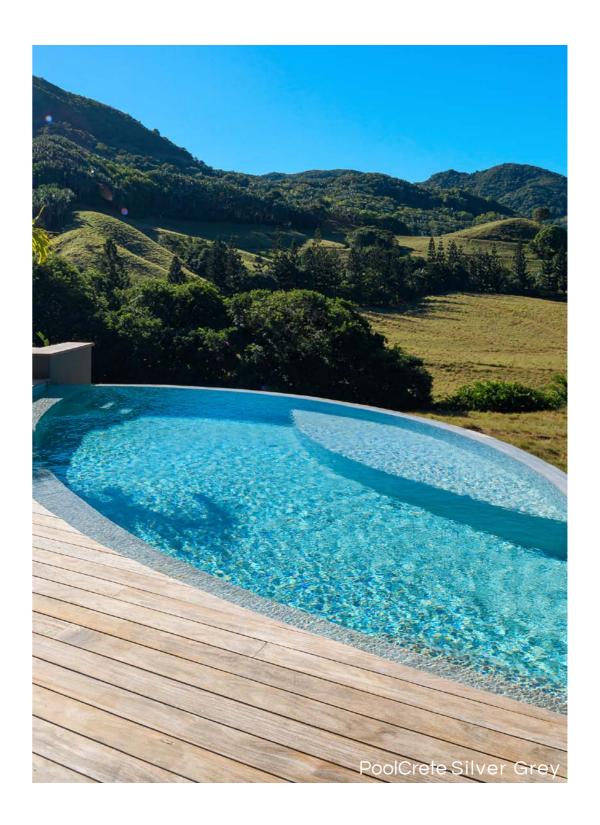

A 6mm thick smooth plaster, recommended for the interior plastering of walls and floors of swimming pools, which becomes a very hard integral part of the pool structure. Not for use above the water level.

SUITABLE SURFACES Gunite. Hand-packed concrete. Scratch coat cement plaster that has cured for 28 days. Must NOT contain blast furnace slag as this could cause

mottling of the PoolCrete.

FINISH

Smooth surface.

THICKNESS 6mm.

APPLICATION Rounded pool trowel.

CURING

Damp down exposed PoolCrete every hour to prevent premature drying, commence filling the pool from the deep end, approximately 6 to 8 hours after application or the following morning.

Filling of pool - See PoolCrete Start-Up Guide.

PACKAGING 40kg bags

COVERAGE Approximately 2m² per 40kg bag.
















- Durable marble pool plaster
- Applied to new or renovated pools
 - Trowel-on application
- Over 40 years proven performance
 - Extensive colour range
 - Superior quality





POOLCRETE | COLOUR RANGE

Moroccan Blue

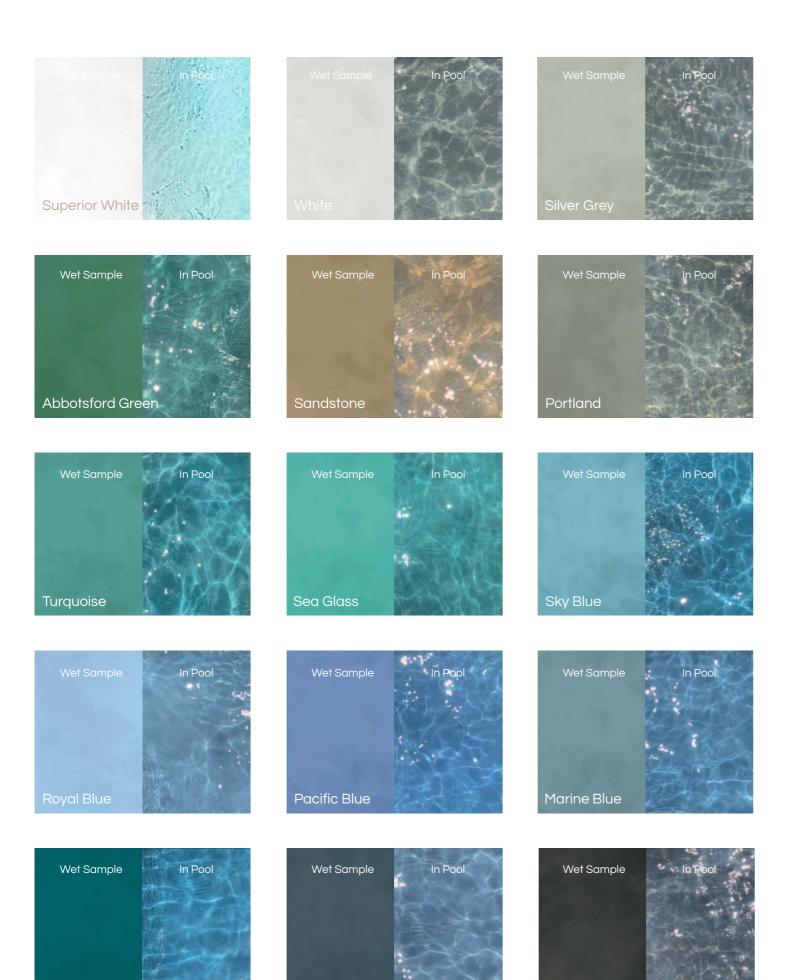


Ocean Blue

Charcoal



POOLCRETE | FEATURED PROJECTS

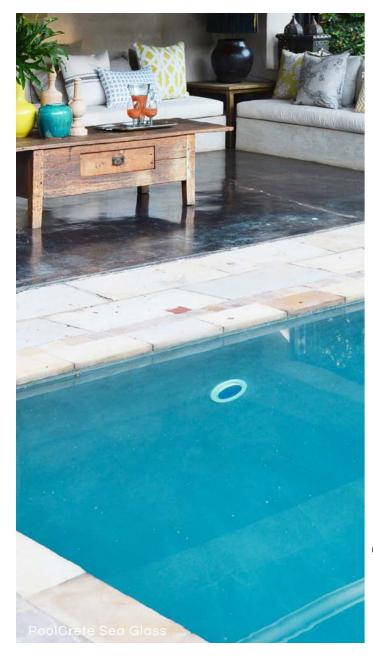






The colour appearance of PoolCrete will change once water is added to the pool - the depth of water and exposure to sunlight will further affect the appearance of the PoolCrete colour.










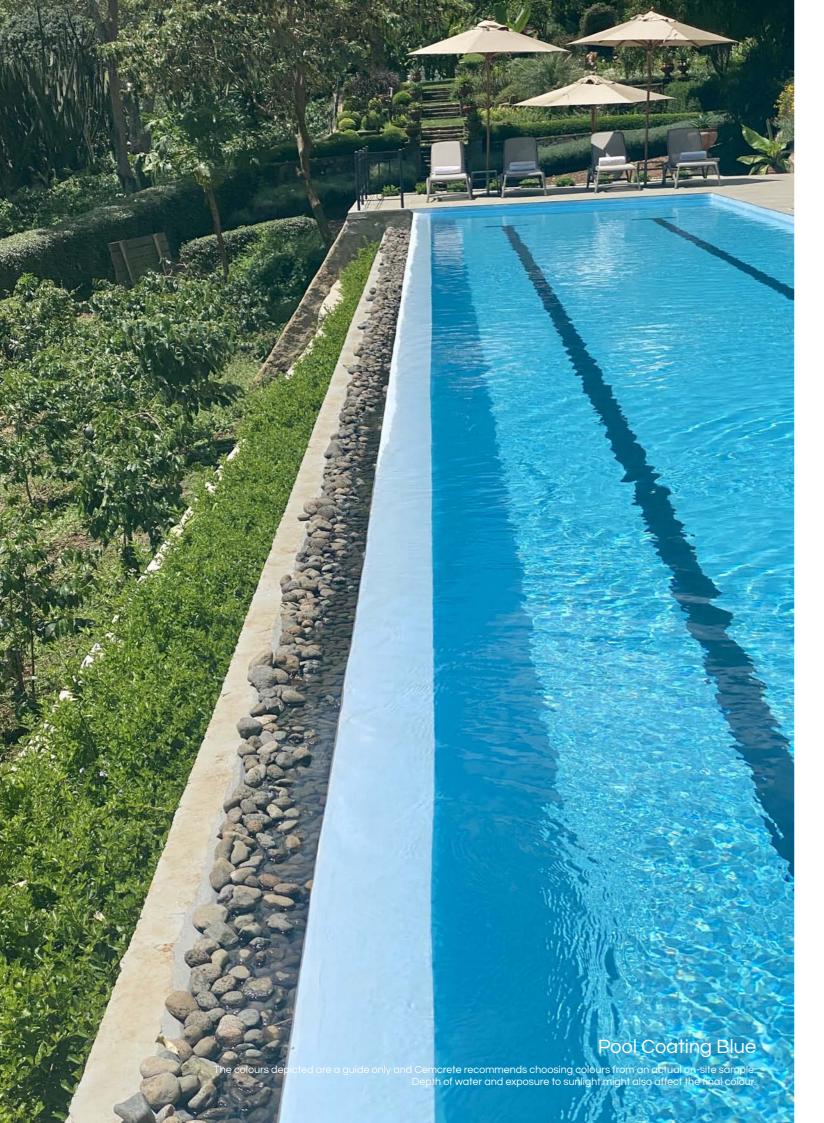

POOL COATING BRUSH-ON CEMENT-BASED POOL PAINT

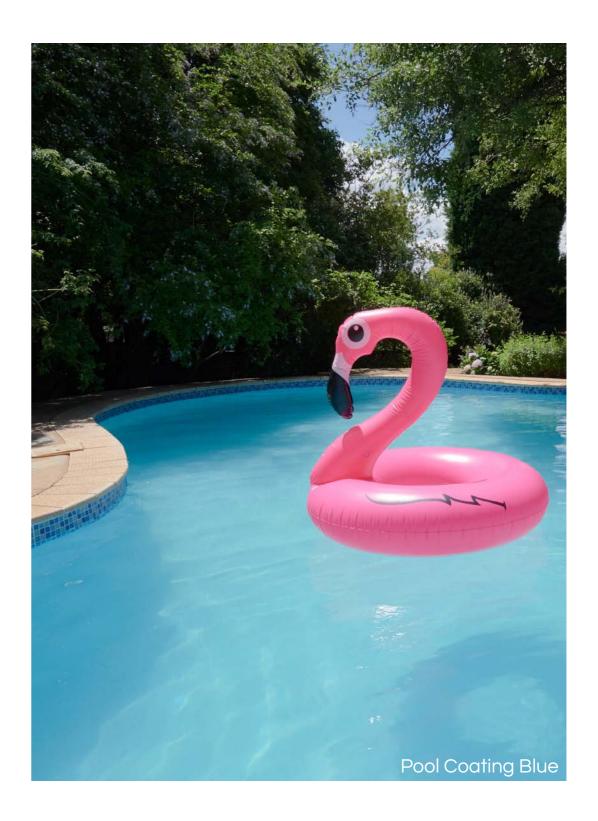

A cement-based coating which can be applied easily and quickly using a roof paint brush. Pool Coating is intended to revitalise your old, pitted, dirty pool plaster as an alternative to re-plastering. It must be noted that Pool Coating is a once-off application.

POOL COATING | PRODUCT INFORMATION & COLOUR RANGE

SUITABLE SURFACES

Old, dirty pool plaster that has been acid-washed.

Not for application to oil paint, plastic paint, new cement surfaces, fibre glass or new pool plaster.

FINISH

Smooth - light brush/roller texture.

THICKNESS

1.1 -1.2mm over 2 coats.

APPLICATION

Roof paint brush / or roller.

CURING

The completed work should be air cured for 6 days before filling the pool with water. Any rain water that does fall during this period should be immediately removed from the pool. Allow an extra days air curing for each day of rain during the six day curing period.

Filling of pool - See Pool Coating Start-Up Guide.

PACKAGING

15kg twin pack.

COVERAGE

Approximately 25m² per 15kg twin pack.












BENEFITS

- Application with a roof paint brush and/or roller
 - Economical & easy to apply
 - Fresh finish to old surfaces
- Excellent bond, flexural and tensile strength
- Good abrasion and chemical resistance
- Becomes an integral part of the pool plaster












BEADCRETE UNIQUE GLASS BEADED POOL PLASTER

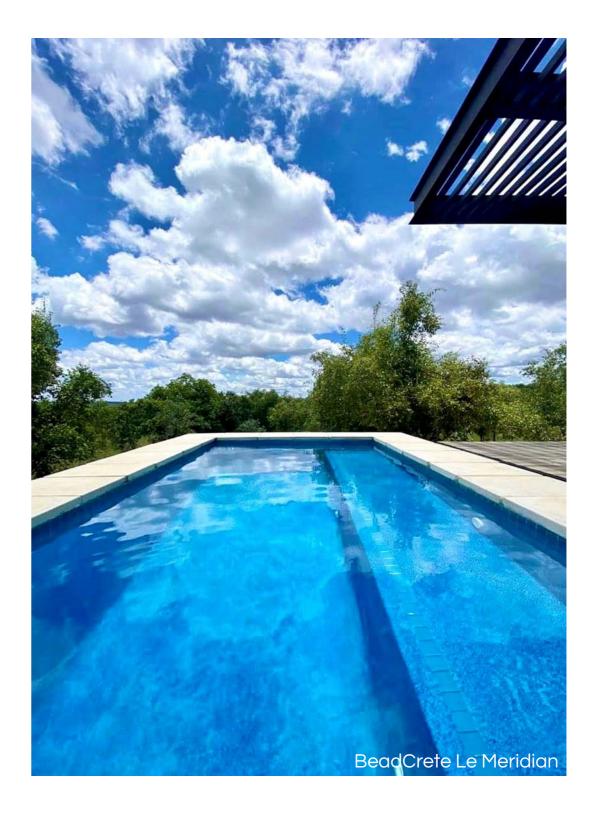

A unique glass beaded decorative pool plaster for use on reinforced concrete pool interiors. The pure glass beads in BeadCrete produce a reflective surface that enhances water sparkle.

SUITABLE SURFACES

New or renovated reinforced concrete pool interiors.

FINISH

Smooth pebble finish.

THICKNESS

8mm.

APPLICATION

Steel trowel & high pressure hose.

CURING

Commence filling the pool from the deep end on the day of application. Damp down exposed BeadCrete every hour to prevent premature drying.

Filling of pool - See BeadCrete Start-Up Guide.


PACKAGING 20kg bag.


COVERAGE

Approximately 0.9m² per 20kg bag.












BENEFITS

- Cost competitive replacement for traditional exposed pebble finishes





BeadCrete contains glass beads that enhances the reflective properties of the water and provides a gentle and soothing feeling under your feet.





POOL PATCHING

UNDERWATER PATCHING FOR PLASTER POOLS

A quick-setting compound having a base of white cement and white marble, specially formulated to enable it to be taken underwater without disintegrating and later becomes rock hard.

APPLICATION Small rounded trowel.

CURING
Approximately 5 minutes - do not disturb for 24 hours.

PACKAGING 1kg & 5kg containers.

COVERAGE 200mm x 200mm requires 1kg or 1.5m²/40kg.

APPEARANCE / COLOUR(S) Available in white only. PoolCrete colours available on order.



POOL SEALER

LIQUID SEALER FOR TREATING PLASTER POOL LEAKS

An inexpensive sealer for treating leaking pools where seepage is through general porosity or thinness of the plaster. It will not seal plumbing leaks or structural cracks.

APPLICATION Add to water of pool.

CURING 10 days to see if treatment is effective.

PACKAGING 5 & 20 litre containers.

COVERAGE 5 litres / 15 000 litre pool. 20 litres / 60 000 litre pool.

APPEARANCE / COLOUR(S) Clear liquid.



BENEFITS

- Treat leaking pools where seepage is caused by general porosity and fine hairline cracks, without removing the water
 - Seals hairline cracks in grout lines on tiled balconies to prevent moisture ingress
 - Can be used in conjunction with sanding to revitalize old dirty pool plaster

POOL CRACK FILLER

FIBRE-REINFORCED FLEXIBLE PASTE CRACK FILLER

A heavily fibre-reinforced flexible paste which, after being allowed to dry, remains flexible under water. Requires the pool to be emptied and all cracks to be hacked open.

PURPOSE

Concrete or gunite pools, will not adhere to fibre glass or plastic.

APPLICATION Knife.

THICKNESS

Remove marble pool plaster 75mm each side of crack through to concrete. V out crack in the concrete 10mm deep and 10mm wide.

CURING

Allow filler to air cure for 2 days.


PACKAGING

1 & 5kg containers.

COVERAGE

Depends on the width and depth of the joint. 6.6 linear meters per 1kg & 33 linear meters per 5kg.

APPEARANCE / COLOUR(S)
Available in grey only.

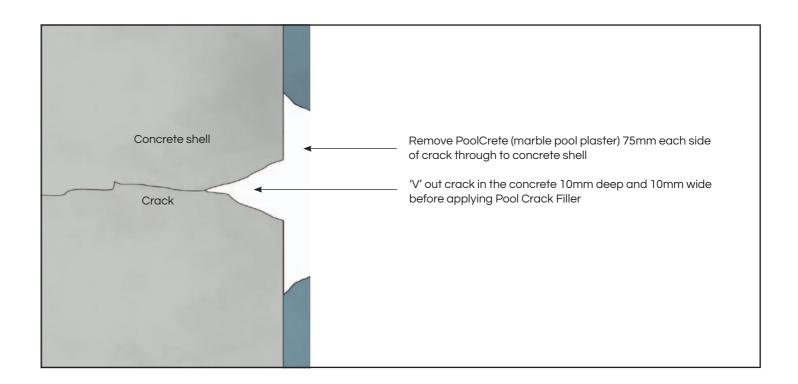

BENEFITS

- To provide a knifing grade filler for cracks in water containing structures
 - Remains flexible under water
 - Supplied in paste form
- Pool Crack Filler is elastomeric (polymer that displays rubberlike elasticity) which is helpful in structures that show movement
 - Cement-based coatings and marble pool plaster bond well to Pool Crack Filler
 - Can be used as a crack filler for floors and walls



info@cemcrete.co.za www.cemcrete.co.za











HEAD OFFICE

Showroom & Warehouse & Telford Street Industria (011) 474 2415 info@cemcrete.co.za

GAUTENG

Johannesburg Showroom

227 Jan Smuts Avenue Parktown North (011) 447 3149 jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park 26 Jakaranda Street Centurion (012) 653 6808 pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse

Unit 3 Eagle Park cnr Bosmansdam & Omuramba Roads Montague Gardens (021) 555 1034 cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.



Creating distinctive cement finishes us unique as you are.