


ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

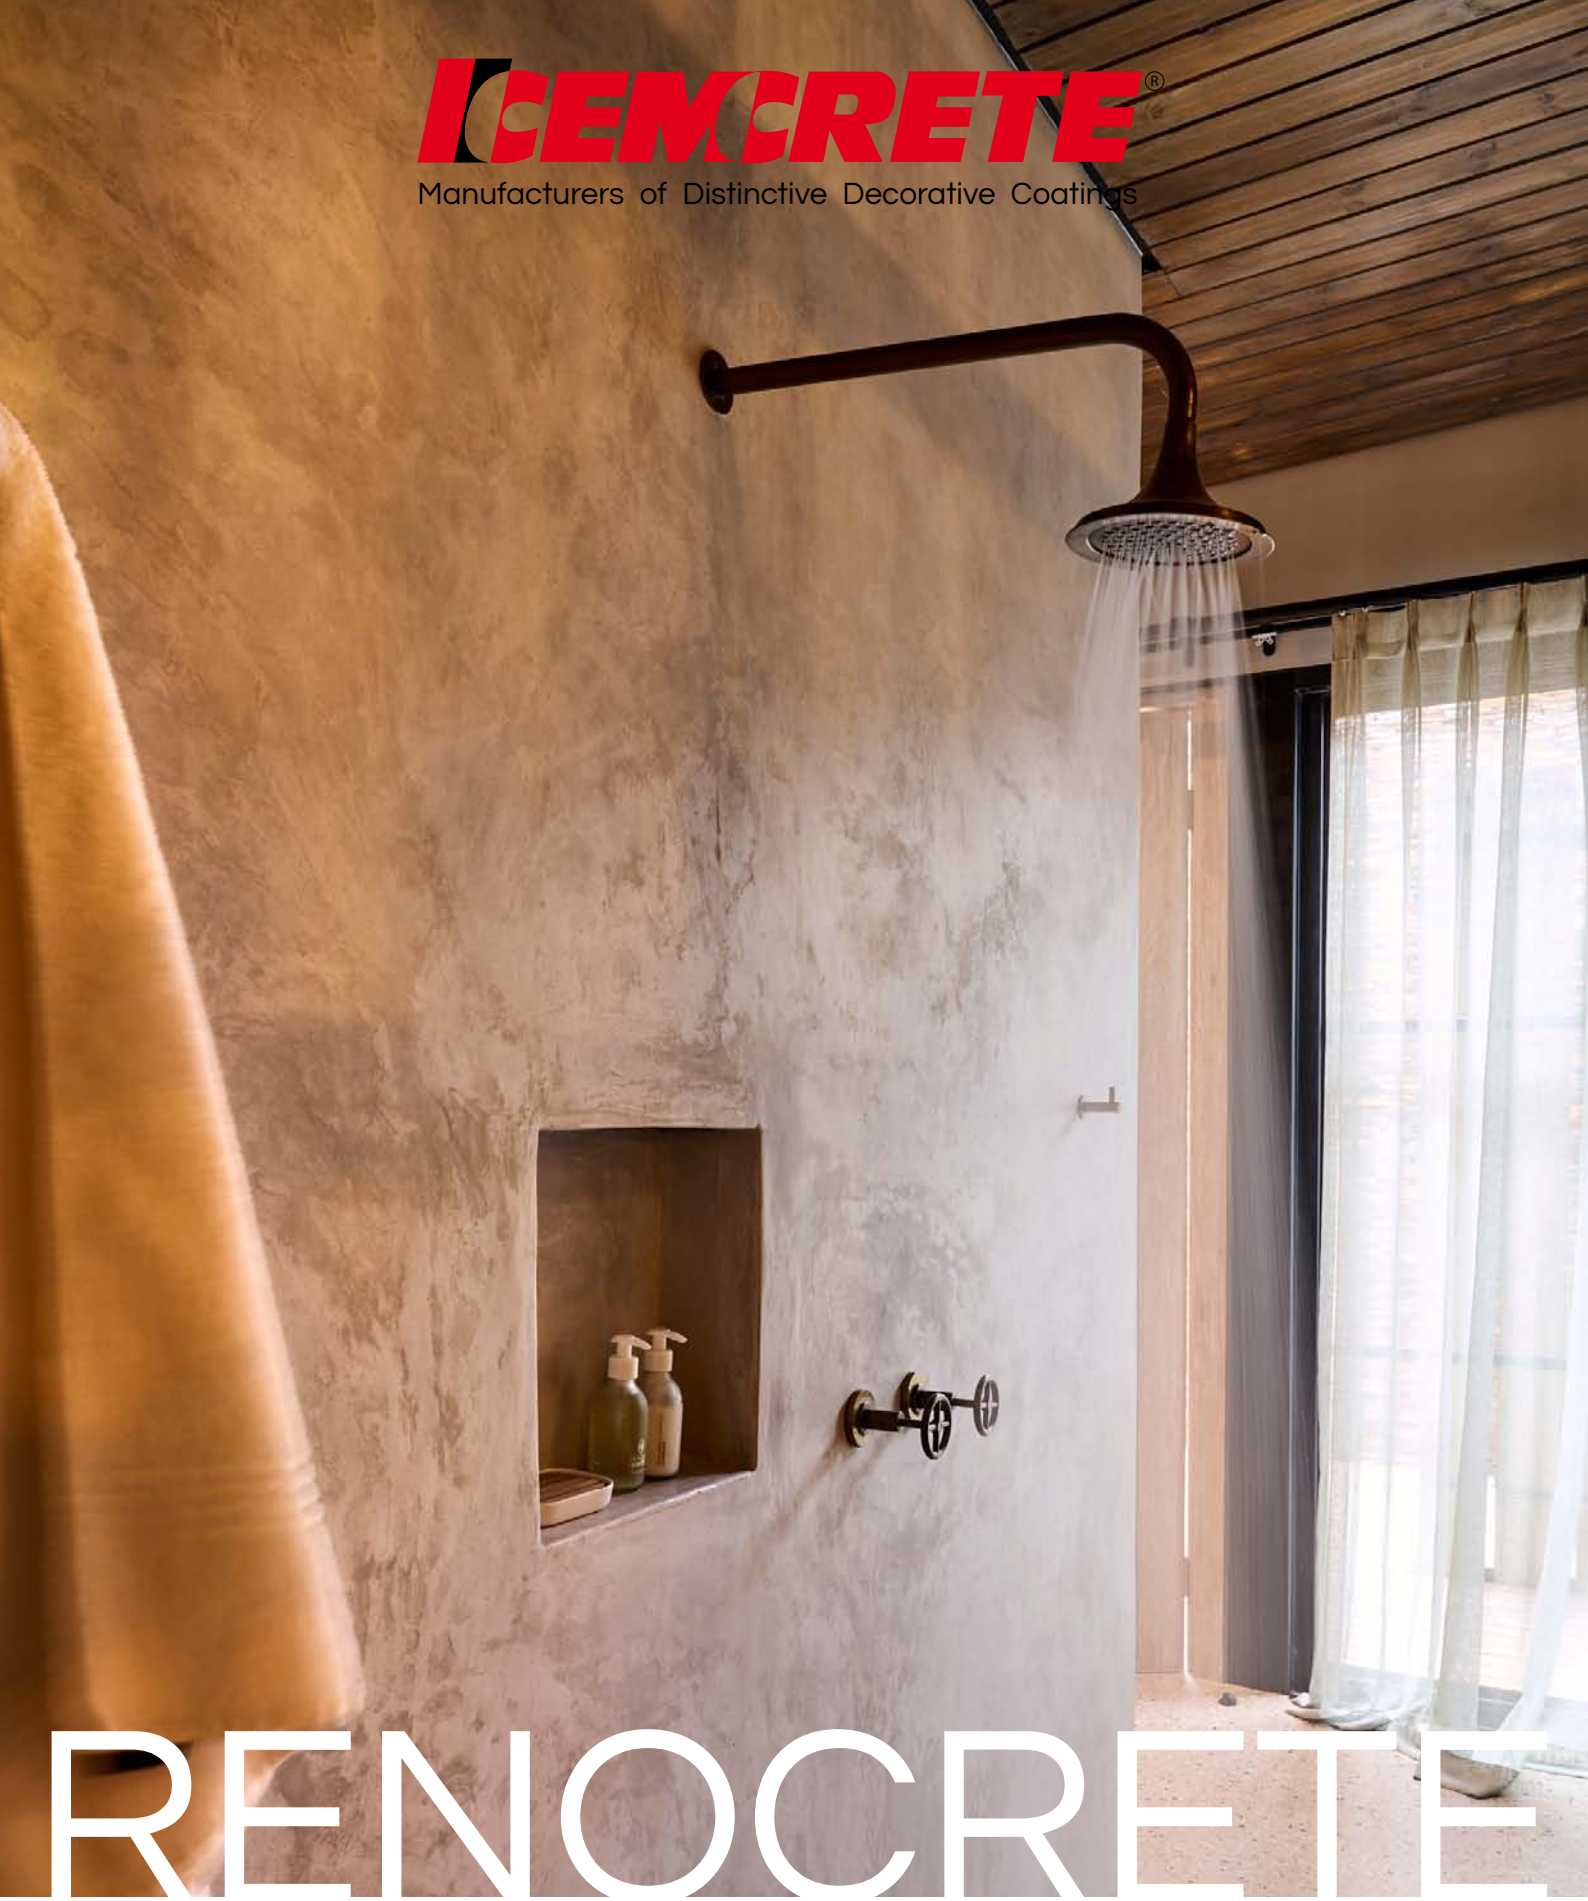

RENOCRETE

VERSATILE SMOOTH / TEXTURED OVERLAY


RENOCRETE

VERSATILE SMOOTH / TEXTURED OVERLAY



RenoCrete Mollusc

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

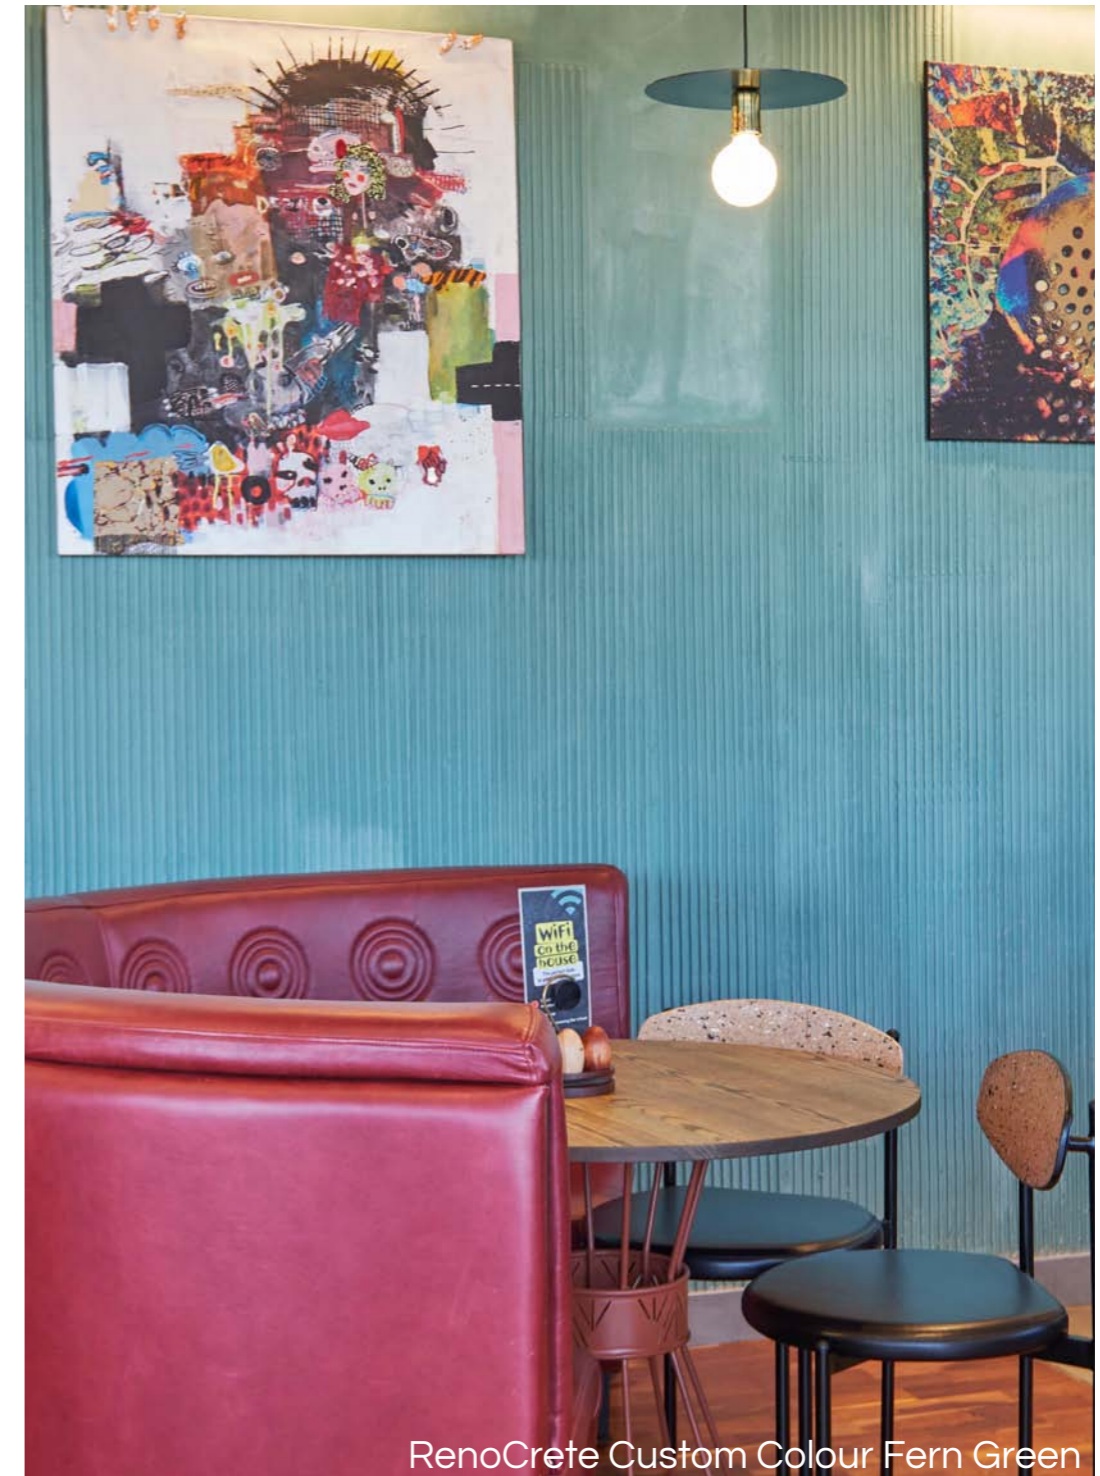

RenoCrete Custom Colour Fern Green

RenoCrete is a pre-coloured spray or trowelled-on cement-based polymer modified two-part resurfacing system. RenoCrete beautifies existing surfaces (wall, floor and other) while achieving good compressive, tensile and flexural strength.

SUITABLE SURFACES

Wood floated plaster, fibre cement board, new dry walling and polystyrene coated with Cemcrete's EIFS BaseCoat or BaseCoat Paste as well as interior & exterior floors.

FINISH

Sprayed-on / Trowelled-on / Knock-down.

THICKNESS

2 - 3mm.

CURING


Leave to air cure for at least 24 hours before curing with a light mist spray of water at least 3 times during the following day. Always spray from bottom to top to avoid water run marks. Allow to dry for at least 3 days before sealing. The moisture in the substrate must be less than 5% prior to sealing.

PACKAGING

20kg bag.

COVERAGE

Approximately 3 - 5m² per 20kg bag depending on finish.

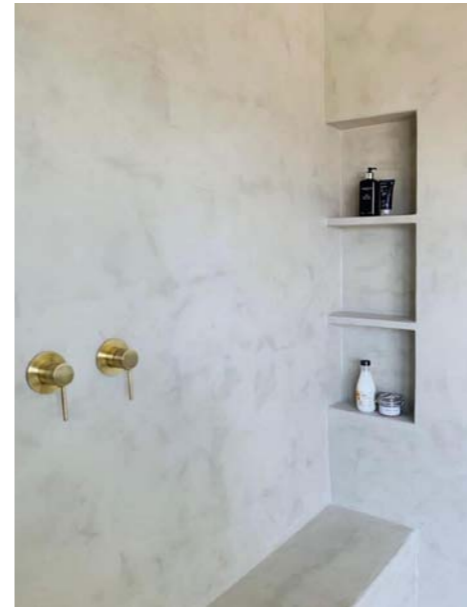


COUNTERTOP
RenoCrete Seal Grey




SPRAY ON APPLICATION
RenoCrete Cloud Grey

BENEFITS

- Versatile application; interior & exterior walls, ceilings, floors, counters & vanities
- Available in multiple finishes, from smooth trowelled to sprayed-on & knock-down
- Can be applied onto wood floated plaster, prefabricated walling, polystyrene or Nutec board coated with Cemcrete's EIFS BaseCoat system
- Achieves good compressive, tensile & flexural strength with abrasion resistance
- UV stable

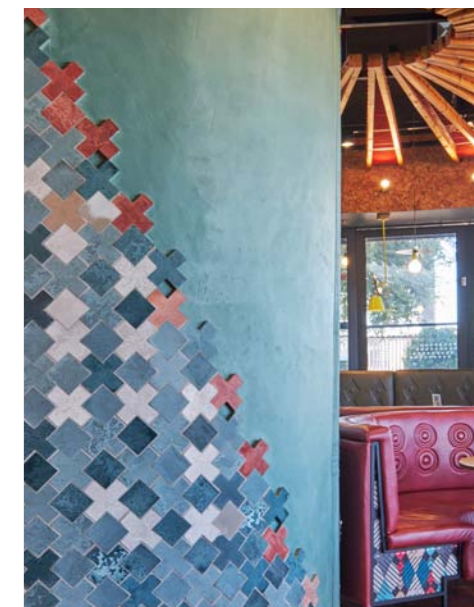









IMPRINTING
RenoCrete Mollusc

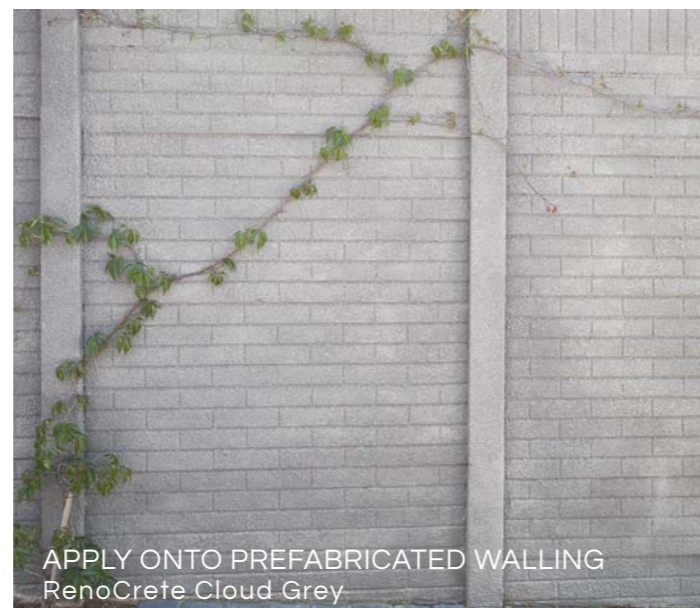

APPLY ONTO PREFABRICATED WALLING
RenoCrete Cloud Grey



RENOCRETE | COLOUR RANGE

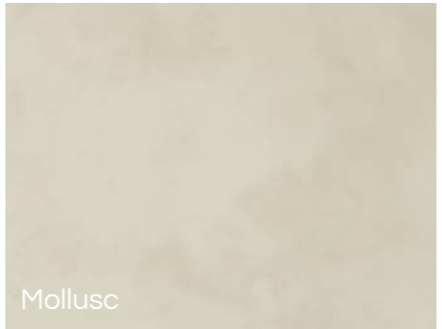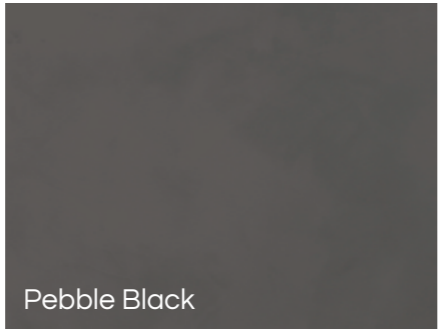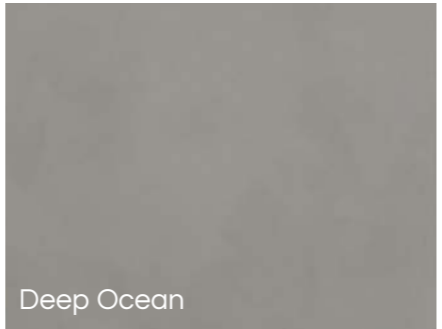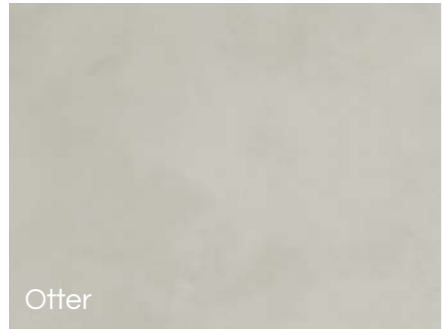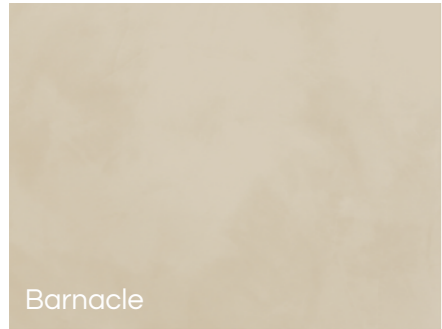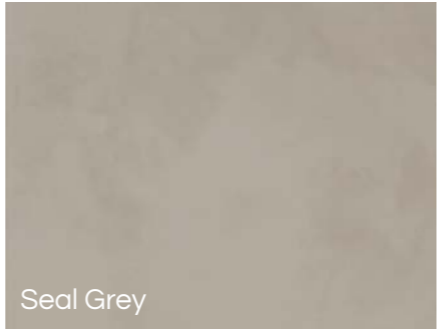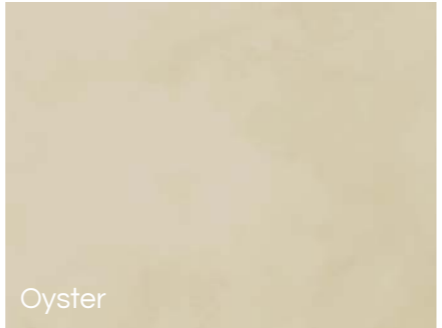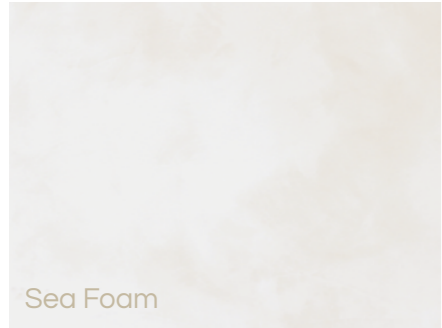

Final colours for the spray and knock-down applications will vary from the smooth trowelled application. Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



RenoCrete Driftwood

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



HEAD OFFICE

Showroom & Warehouse
8 Telford Street
Industria
(011) 474 2415
info@cemcrete.co.za

GAUTENG

Johannesburg Showroom
227 Jan Smuts Avenue
Parktown North
(011) 447 3149
jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park
26 Jakaranda Street
Centurion
(012) 653 6808
pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse
Unit 3 Eagle Park
cnr Bosmansdam & Omuramba Roads
Montague Gardens
(021) 555 1034
cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.

CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes
as *unique* as you are.