

The logo for ICEMCRETE features the word "ICEMCRETE" in a bold, red, sans-serif font. The letter "I" is stylized with a black vertical bar on its left side. A registered trademark symbol (®) is located at the top right of the word.

Manufacturers of Distinctive Decorative Coatings

The background of the entire page is a photograph of a large, flat, reddish-brown waterproofed concrete surface. In the foreground, there is a low, dark-colored concrete wall or curb. The background shows a lush green hillside under a clear blue sky.

WATERPROOFING PRODUCTS

Waterproofing Additives, Sealers, Linings and Systems



MatCrete Brown (CemWash Sandstone above water)

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.

MATCRETE

REINFORCED WATERPROOFING CEMENT LINING



MatCrete (Overcoated with a suitable roof paint)

Waterproof cement lining that can be applied directly onto hard compacted soil for the cost-effective creation of any water-containing structures such as fish ponds, water channels, dams, drinking troughs, relining of pipes, repair of old cracked reservoirs, flat roof waterproofing, parapet waterproofing etc.

THATCHCRETE

CEMENT LINING FOR THATCH ROOFS

SUITABLE SURFACES

Applied directly onto hard compacted soil, cement or concrete-based water channels, dams, drinking troughs, reservoirs, flat roofs, parapets etc.

FINISH

Rough textured. Can be smooth trowelled.

THICKNESS

2mm including the CemForce. Max thickness of 8mm – add a layer of CemForce for every extra 2mm.

APPLICATION

Brush-on.

CURING

Allow finished work to air cure for 3 days before filling with water.

PACKAGING

40kg bags.

COVERAGE

Approximately 6m² for 3 coats per 40kg bag

For creating a thin, reinforced, waterproof cement lining that is a low conductor of electricity and can be applied directly onto the exterior of an old or new combed grass-thatched roof. This lining is tough enough to resist mammals and birds from causing damage to the roof or entering the building.

SUITABLE SURFACES

Exterior of an old or new combed grass-thatched roof.

FINISH

Textured finish.

THICKNESS

Approximately 4 - 5mm depending on thatch density & profile.

APPLICATION

Brush-on.

CURING

Allow finished ThatchCrete work to air cure for 5 days.

PACKAGING


40kg bags.

COVERAGE

Approximately 4m² for 3 coats per 40kg bag depending on number of layers of CemForce used and surface profile.

NOTE


Can be coated with TPC Roof Paint, or CemWash for various colour and finish options.

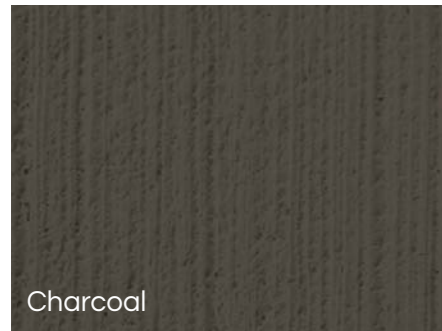

Charcoal



Grey

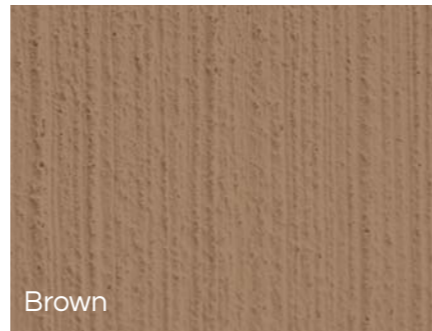

Brown

BENEFITS

- Thin cement linings can be formed in-situ
- Can be reinforced with as many layers of CemForce as necessary for strength required
- Ready to use with the addition of FlexBond solution only
 - Not only waterproof, but vapour proof as well
 - Fish and plant friendly
- Cost-effective creation of water-containing structures
- Can be applied directly onto hard compacted soil



ThatchCrete system application over thatching



Completed project



Did you know
Every layer of CemForce applied can withstand 1 meter of positive water pressure

MatCrete Grey

BENEFITS

- Applied directly onto the exterior of new or old combed grass-thatched roofs
- Low conductor of electricity
- Waterproof
- Resistant to dismantling by mammals (such as baboons, etc) & birds

PERMASTOP

CRYSTALLINE WATERPROOFING TREATMENT



A cement-based mixture containing chemicals which combine with the water in cement & migrate into the concrete or cement plaster thereby effectively waterproofing the structure against hydrostatic pressure. For slurry coatings & plugging holes. For solving most types of waterproofing problems in below-ground & water-containing structures that contain OPC.

SUITABLE SURFACES
Must be in contact with the cement / concrete to be effective.

FINISH
Brushed finish unless plaster is applied over it.

APPLICATION
Brush-on.

CURING
In hot, dry conditions, cure completed work by dampening with clean water three times during the day following the day of application. Protect against freezing for 24 hours. Protect from direct sun and wind by covering with plastic or wet hessian for 24 hours.

PACKAGING
1, 5 & 25kg containers.


COVERAGE
Brush application: Approximately 1,3m²/ kg / coat depending upon suction and texture of surface.

Joint filling: Depends on size of joint.

With polypropylene membrane:
Approximately 3kg/ m².

APPEARANCE / COLOUR(S)
Grey - can supply white upon request.

WATCH THE VIDEO

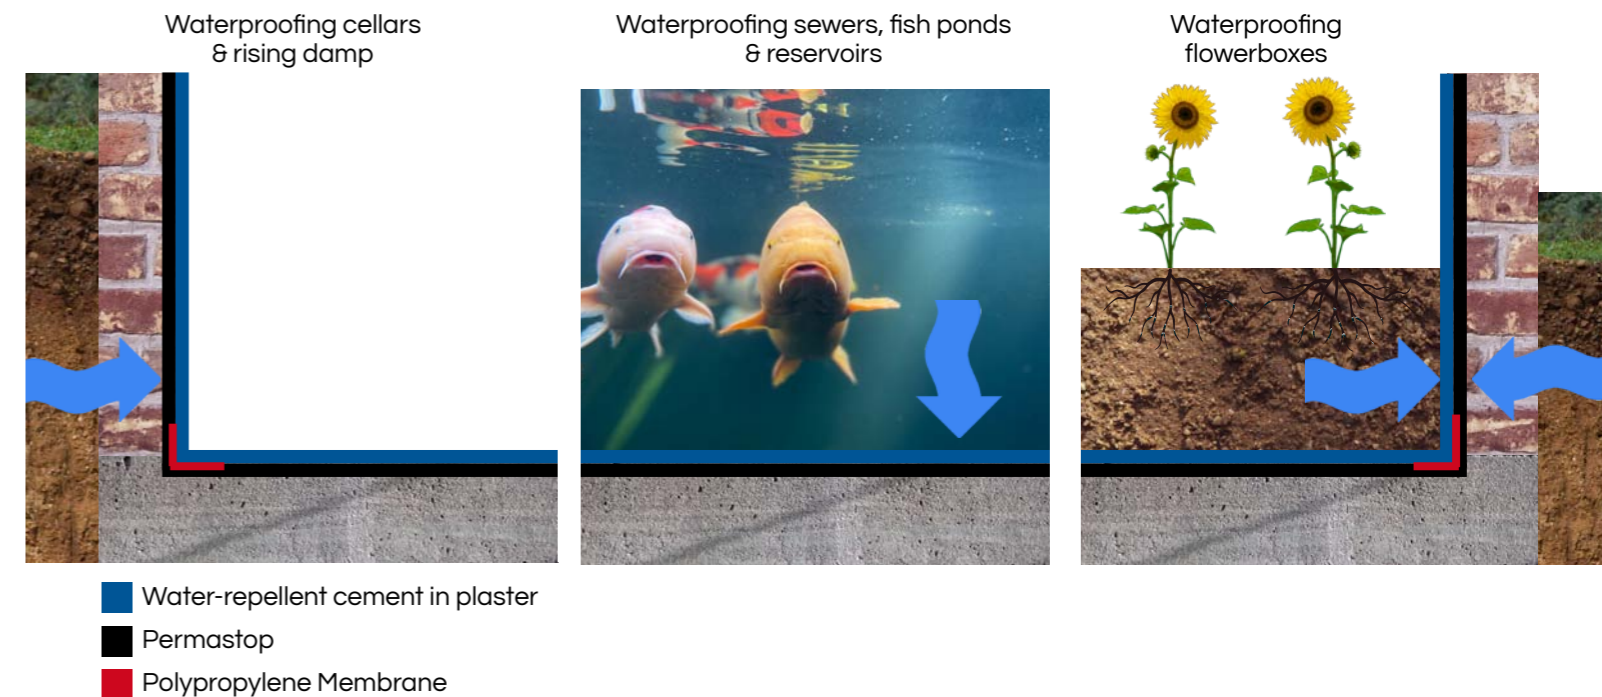

BENEFITS

- Resists extreme hydrostatic pressure from both the positive & negative side of the substrate
- Resistant to aggressive chemicals i.e. oil, salt water, alkalis, certain chemicals, weak acids & aggressive sulphate soils
- Self-mending when punctured or torn & is not subject to deterioration and is thus permanent
 - Does not require protection when backfilling
 - Can be applied to moist surfaces
 - Can seal static hairline cracks
- Increases the strength of concrete by up to 30% dependent on quality of original concrete
 - Waterproof but not vapour proof
 - No VOC's
- Can seal gushing leaks in conjunction with Cemcrete's Permastop Accelerator

ELASTOBOND

FLEXIBLE BONDING LIQUID

ElastoBond is a liquid polymer to be mixed with cement-based mixtures / matrices to create a tough, flexible, UV-resistant waterproofing membrane.

SUITABLE SURFACES

Parapet walls (to create capping), as well as cantilevered areas (to waterproof). Light trafficked rooftops, walkways and decks. In these areas, occasional foot traffic is permitted. Planter boxes, retaining walls & basements NOT subjected to rising damp. Bathrooms, shower recesses, laundries, & all wet areas requiring a tiled finish. Swimming pools & wading pools when covered with tiles or decorative toppings. Water containment areas such as water features, ponds & fountains. Roofs, walls & floors, over concrete, cement render, marine plywood, metal, pre-cleaned galvanized iron, fibre cement sheets & exterior grade plasterboard.

APPLICATION

Brush-on.

CURING

Usually within 24 - 36 hours, depending on humidity, ambient temperatures & surface porosity. The ElastoBond mixture dries by reaction between powder & liquid, moisture evaporation & absorption into the substrate, so allow longer for surfaces with low porosity.

Allow ElastoBond mixture to cure before subjecting the floor to light foot traffic (at least 24 hours).

Do not use showers for at least 72 hours after application of ElastoBond mixture; this ensures application is thoroughly cured.

PACKAGING

1, 5 & 20 litre containers.

COVERAGE

Coverage is approximately 10m² per 20 litres of ElastoBond mixed with 20kg MatCrete at 2 - 3mm cured film thickness. This is also dependent on the amount & type of membrane used in the application.

APPEARANCE / COLOUR(S)

White liquid which dries clear.



BENEFITS

- Applied by brush, ElastoBond & MatCrete mixture possesses excellent flexibility, crack bridging properties and UV resistance which allows it to be left exposed & subjected to light foot traffic
- Excellent flexibility & crack-bridging properties
- UV-resistant

WATER-REPELLENT CEMENT

READY-TO-USE WATER-REPELLENT CEMENT

Use Water-Repellent Cement in place of Ordinary Portland Cement to overcome capillary absorption of moisture into cement mortar, cement plaster & concrete.

SUITABLE SURFACES

Suitable for reducing permeability in concrete tanks, reservoirs, sewerage works, cellars, basement walls & floors, garage pits, walls & precast stone.

APPLICATION

Ready-to-use waterproof cement.

FINISH

Will not change the finish of the cement mix.

CURING

In hot, dry conditions, cure completed work by damping down with water or protecting with wet sacks or plastic sheeting.

PACKAGING

50kg bag.

COVERAGE

Dependant on the mix.

APPEARANCE / COLOUR(S)

Grey powder.

BENEFITS

1. Reduced moisture movement, crazing, efflorescence & moisture penetration
2. Reduces rising damp in brickwork when used in mortar
3. Prevents loss of water from water containing structures

CEMENT WATERPROOFING COMPOUND

WATER-REPELLENT CEMENT ADDITIVE

A water-repellent powder for adding to cement to overcome capillary absorption of moisture into cement mortar, cement plaster & concrete.

SUITABLE SURFACES

Suitable for reducing permeability in concrete tanks, reservoirs, sewerage works, cellars, basement walls & floors, garage pits, walls & precast stone. Interior & exterior wall surfaces, including polystyrene & certain foams or such.

APPLICATION

Mixed with Portland cement in powder form.

FINISH

Will not change the finish of the cement mix.

CURING

In hot dry conditions, cure completed work by damping down with water or protecting with wet sacks or plastic sheeting.

PACKAGING

1 & 25kg containers.

COVERAGE

2% of the weight of the cement to be used in the mix which is equal to 1kg per 50kg cement.

APPEARANCE / COLOUR(S)

Grey powder.

BENEFITS

- Prevents loss of water from water-containing structures
- Reduces moisture movement, crazing, efflorescence & moisture penetration
- Reduces rising damp in brickwork when used in the mortar

SILICONSEAL SOLVENT-BASED SEALER

PENETRATIVE WATERPROOFING SYSTEM

SiliconSeal Solvent-Based Sealer greatly reduces the water absorption of concrete, clay bricks, natural stone, fibre cement & plaster. SiliconSeal Solvent-Based Sealer can also be used for the prevention of rising damp in brick walls by pumping the fluid into previously drilled holes along the course immediately above the faulty damp-proof membrane.

SUITABLE SURFACES

Concrete, cement, cement plaster, mortar, natural sandstone, clay & cement bricks & coloured cement finishes.

APPLICATION

Brush, roller or spray until surface is saturated (minimum of 2 coats wet-on-wet).

THICKNESS

Penetrative (not film forming). Penetrates the pore structure up to a depth of 6mm.

CURING

SiliconSeal Solvent-Based must be allowed to dry for a minimum of 2 days, and a maximum of 5 days, depending on the weather, to allow the solvent to fully evaporate. Application of another sealer, or decorative coating, before or after this window, will result in adhesion problems. Full cure takes place after 7 - 14 days.

PACKAGING

Available in 1, 5 & 25 litre containers.

COVERAGE

Face bricks 6m²/litre
Porous bricks 3m²/litre
Concrete 4m²/litre

These figures are approximate and will vary according to the texture & porosity of the particular surface.

APPEARANCE / COLOUR(S)

A clear treatment which does not darken or change the colour of the surface to which it is applied.



Drilling holes to repair rising damp



Pouring SiliconSeal Solvent-Based Sealer into holes to repair rising damp

SILICONSEAL WATER-BASED SEALER

PENETRATIVE WATERPROOFING SYSTEM

SiliconSeal Water-Based Sealer combines the properties of both organic polymers and inorganic silicates like quartz, curing to form durable cross-linked resins. It greatly reduces water absorption in concrete, clay bricks, natural stones, fibre cement, and plaster, ensuring superior hydrophobic properties with a significant beading effect due to improved interfacial tension. Masonry treated in this manner can still 'breathe,' allowing moisture to dry out through the surface.

SUITABLE SURFACES

Concrete, cement, cement plaster, mortar, natural sandstone, clay & cement bricks & coloured cement finishes.

APPLICATION

Brush, roller or spray until surface is saturated (minimum of 2 coats wet-on-wet).

THICKNESS

Penetrative (not film forming). Penetrates the pore structure up to a depth of 3mm.

CURING

SiliconSeal Water-Based must be allowed to dry for a minimum of 2 days, and a maximum of 5 days, depending on the weather, to allow the water to fully evaporate. Application of another sealer, or decorative coating, before or after this window, will result in adhesion problems. Full cure takes place after 7 - 14 days.

PACKAGING

Available in 1, 5 & 20 litre containers.

COVERAGE

Face bricks 6m²/litre.
Porous bricks 3m²/litre.
Concrete 4m²/litre.

These figures are approximate and will vary according to the texture & porosity of the particular surface.

APPEARANCE / COLOUR(S)

A milky white liquid treatment which dries clear & does not darken or change the colour of the surface to which it is applied.



Water beading on CemWash treated with SiliconSeal Water-Based Sealer

0860 CEMCRETE

info@cemcrete.co.za

www.cemcrete.co.za



HEAD OFFICE

Showroom & Warehouse
8 Telford Street
Industria
(011) 474 2415
info@cemcrete.co.za

GAUTENG

Johannesburg Showroom
227 Jan Smuts Avenue
Parktown North
(011) 447 3149
jsa@cemcrete.co.za

Centurion Showroom & Warehouse

15 Coachmen's Park
26 Jakaranda Street
Centurion
(012) 653 6808
pretoria@cemcrete.co.za

CAPE TOWN

Showroom & Warehouse
Unit 3 Eagle Park
cnr Bosmansdam & Omuramba Roads
Montague Gardens
(021) 555 1034
cape@cemcrete.co.za

We have distributors both nationally and internationally. Contact us to locate your nearest retailer or contractor.

CEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

Creating distinctive cement finishes
as *unique* as you are.