

A photograph of a decorative courtyard featuring a swimming pool in the foreground. The pool has a dark, possibly waterproofed, lining. In the background, there are stone walls, a set of stairs with a red carpet, and several large terracotta pots containing plants. The overall scene is well-maintained and aesthetically pleasing.

ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

MATCRETE

Reinforced waterproofing cement lining

Waterproof cement lining that can be applied directly onto hard compacted soil for the cost-effective creation of any water-containing structures such as fish ponds, water channels, dams, drinking troughs, relining of pipes, repair of old cracked reservoirs, flat roof waterproofing, parapet waterproofing etc.

BENEFITS

- Thin cement linings can be formed in-situ
- Can be reinforced with as many layers of CemForce as necessary for strength required
- Ready to use with the addition of FlexBond solution only
- Not only waterproof, but vapour proof as well
- Fish and plant friendly
- Cost-effective creation of water-containing structures
- Can be applied directly onto hard compacted soil

SPECIFICATIONS

| | |
|-------------------|---|
| Suitable surfaces | Applied directly onto hard compacted soil, cement or concrete based water channels, dams, drinking troughs, reservoirs, flat roofs, parapets etc. |
| Finish | Rough textured Can be smooth trowelled |
| Thickness | 2mm including the CemForce Max thickness of 8mm – add a layer of CemForce for every extra 2mm |
| Application | Brush-on |
| Packaging | 40kg bags |
| Coverage | Approximately 6m ² per 40kg bag |
| Curing | Allow finished work to air cure for 3 days before filling with water |
| Colour/s | Available in 3 colours |

INTENDED FOR USE WITH

| | |
|----------|--|
| FlexBond | 1, 5 litre & 20 litres - Approximately 2 litres per 40kg bag of MatCrete (FlexBond to be diluted 1:4 with water) |
| CemForce | Woven polypropylene fibre – sold per m ² (1m x any length; max 640m) |
| CemLam | Woven polypropylene fibre extrusion laminate - sold as 1.6m width by the metre (max 430m) |

TOOLS NEEDED



Block brush
Steel trowel (optional)

SUPPORTING CEMCRETE PRODUCTS

ElastoBond



MATCRETE | COLOUR RANGE

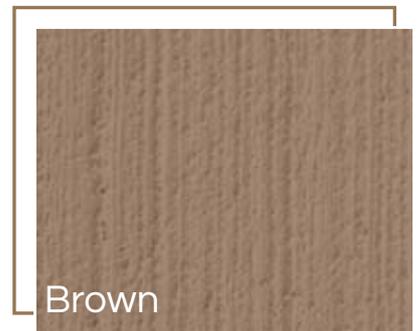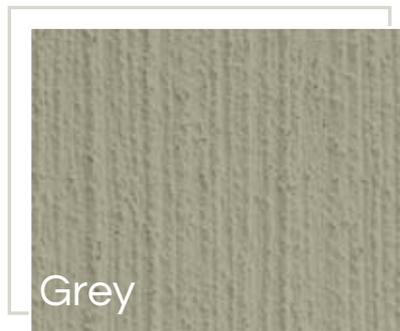

Did you know

Every layer of CemForce applied can withstand 1 meter of positive water pressure.