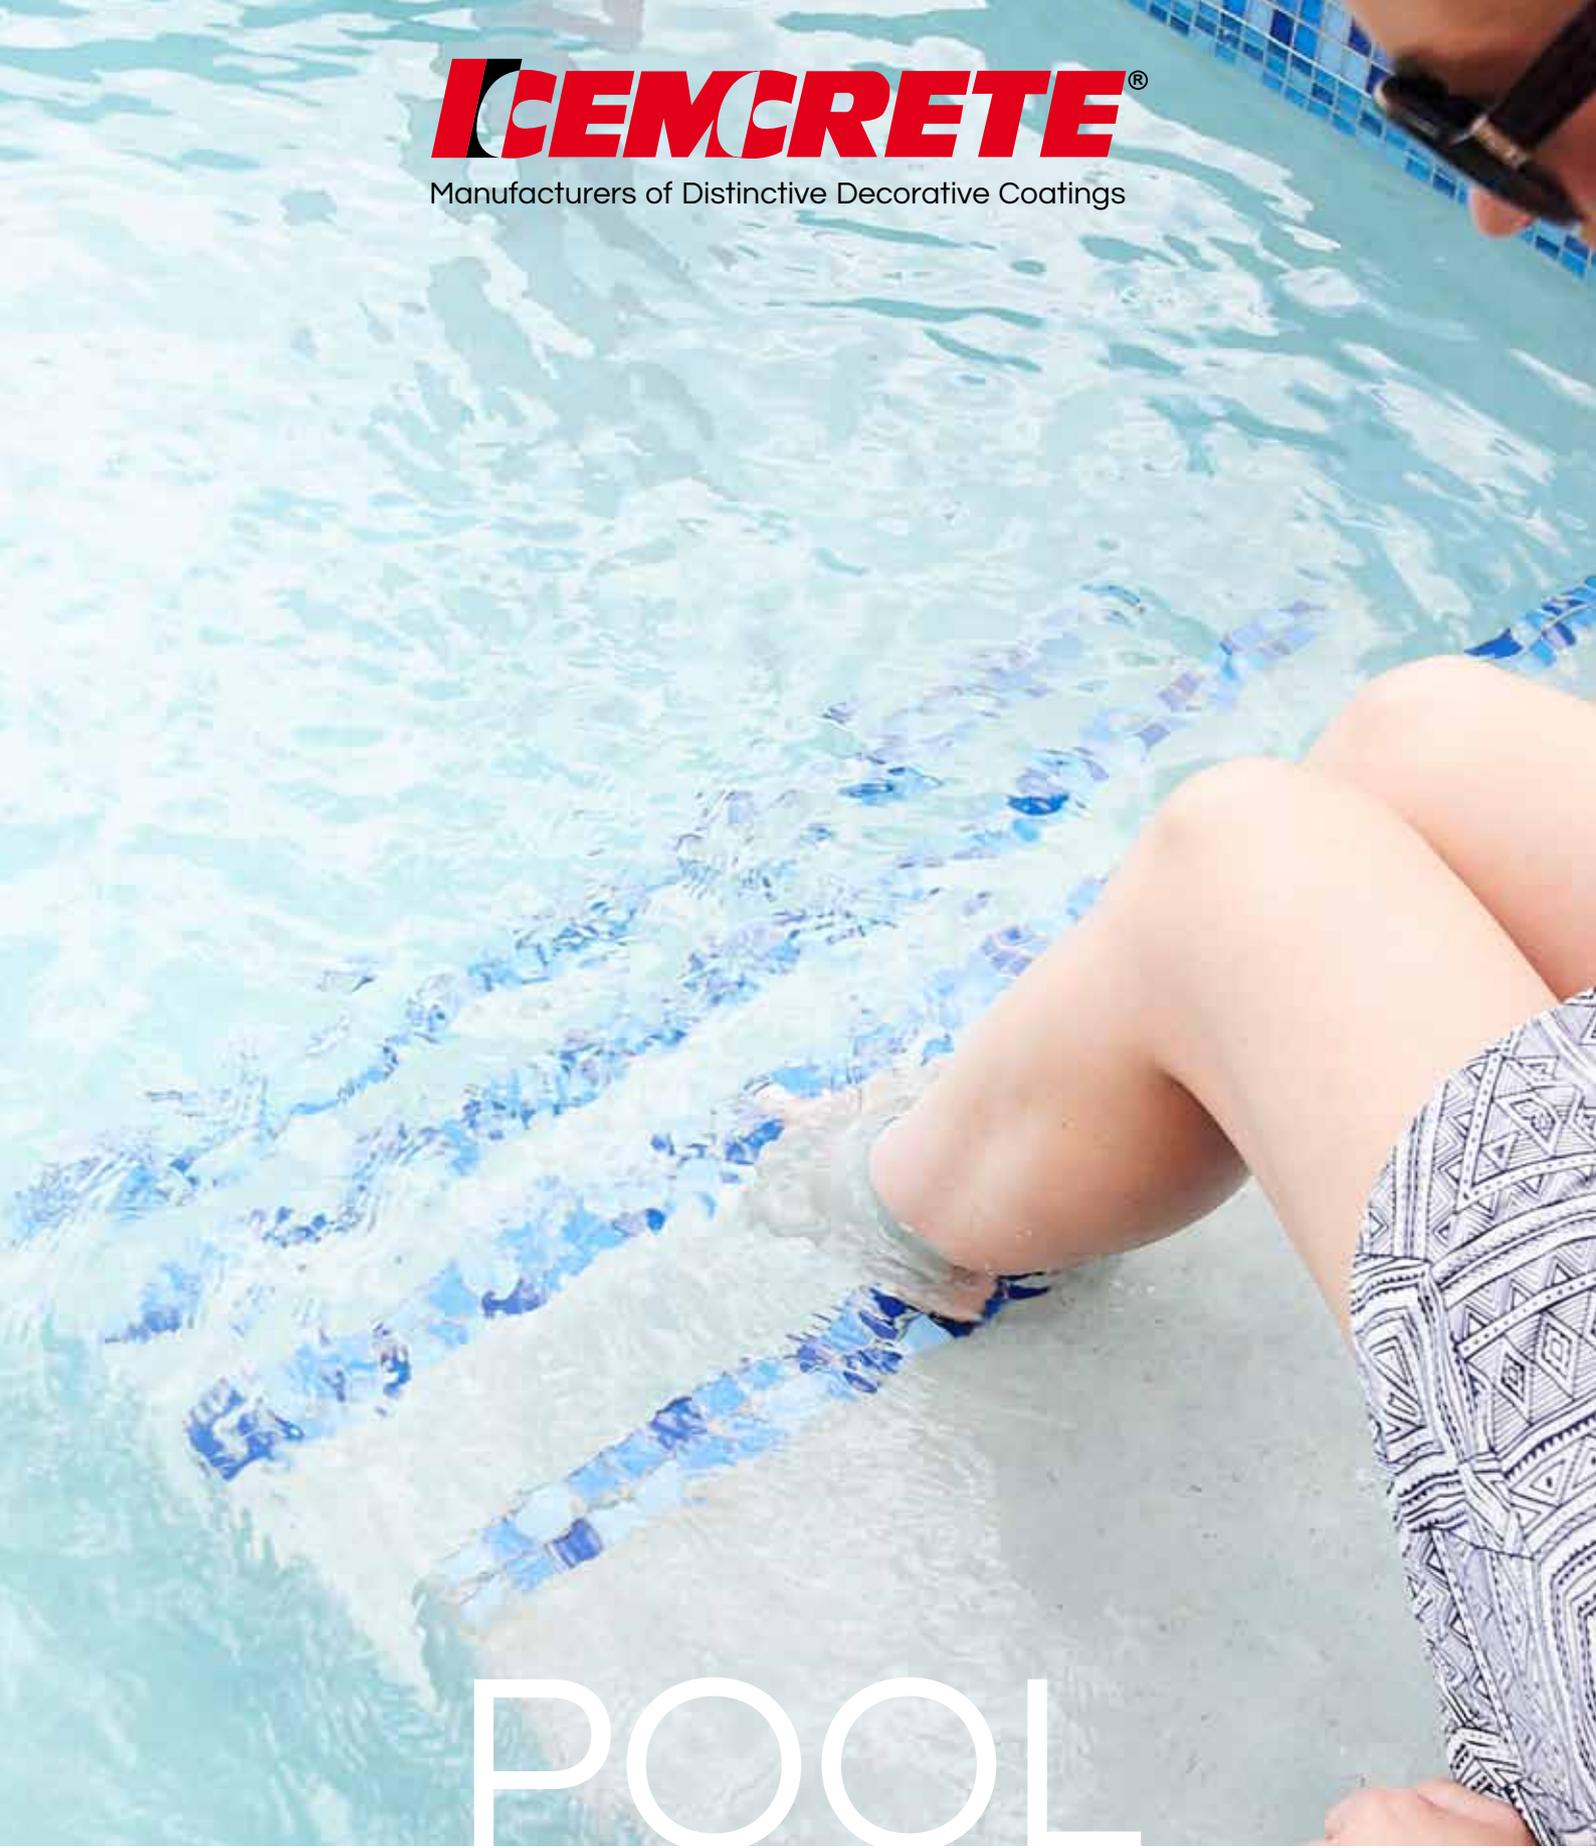


The logo for ICEMCRETE, featuring the word in a bold, red, italicized sans-serif font. The letter 'I' is black with a white outline, and the 'C' is white with a black outline. A registered trademark symbol (®) is located at the top right of the word.

**ICEMCRETE**®

Manufacturers of Distinctive Decorative Coatings

A photograph of a swimming pool deck and water. The deck is made of light-colored concrete with a decorative mosaic pattern of blue and white tiles. A person's legs, wearing patterned shorts, are visible on the right side of the frame, sitting on the edge of the pool. The water is clear and blue.

# POOL PRODUCTS

---

Pool Preparation Products, Decorative Finishes & Pool Repair Products

# POOLCRETE

A 6mm thick smooth plaster, recommended for the interior plastering of walls and floors of swimming pools, which becomes a very hard integral part of the pool structure. Not for use above the water level.

## WHITE & COLOURED MARBLE POOL PLASTER

### PoolCrete Abbotsford Green

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.



### BENEFITS

- Durable marble pool plaster
- Applied to new or renovated pools
- Trowel-on application
- Over 40 years proven performance
- Extensive colour range
- Superior quality

### SPECIFICATIONS

Suitable surfaces	Gunite Hand-packed concrete Scratch coat cement plaster that has cured for 28 days Must not contain blast furnace slag as this could cause mottling of the PoolCrete
Finish	Smooth surface
Thickness	6mm
Application	Rounded pool trowel
Packaging	40kg bag
Coverage	Approximately 2m <sup>2</sup> per 40kg bag
Curing	Damp down exposed PoolCrete every hour to prevent premature drying, commence filling the pool from the deep end, approximately 6 to 8 hours after application or the following morning Filling of pool - See PoolCrete Start-Up Guide
Colour/s	Available in 15 colours

### INTENDED FOR USE WITH

PoolCrete Primer  
FlexBond



### TOOLS NEEDED

Rounded pool trowel

### SUPPORTING CEMCRETE PRODUCTS

Pool Crack Filler  
Pool Sealer  
Pool Patching

# POOLCRETE | COLOUR RANGE

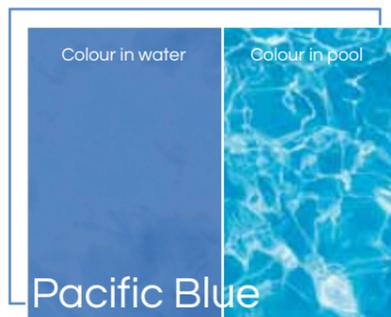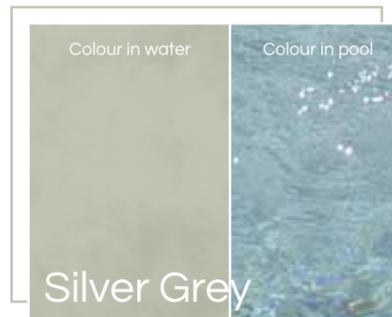

*Did you know*


PoolCrete is our brand name for pool plaster, also known as marbelite, which are generic names of the same product. PoolCrete is one of the first products manufactured by Cemcrete upon its inception in 1973 and has been used in more than 250 000 swimming pools all over the world.

PoolCrete Sea Glass

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.



PoolCrete White

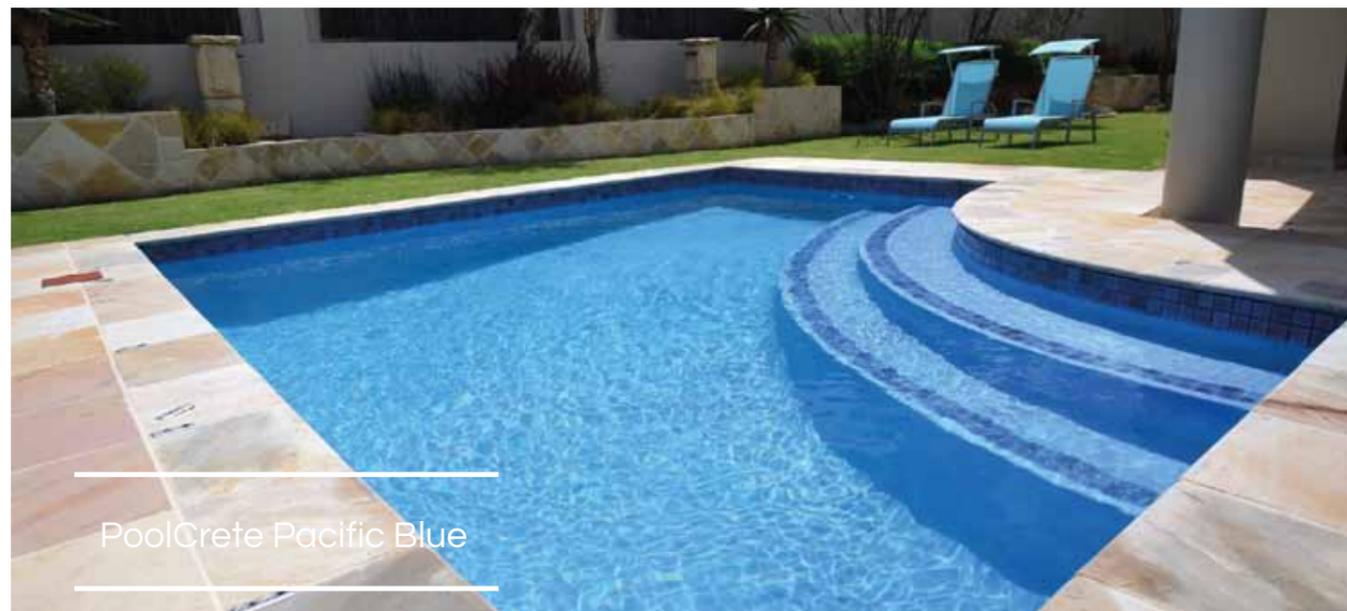

PoolCrete Pacific Blue




PoolCrete Portland



PoolCrete  
Silver Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.


PoolCrete Sandstone

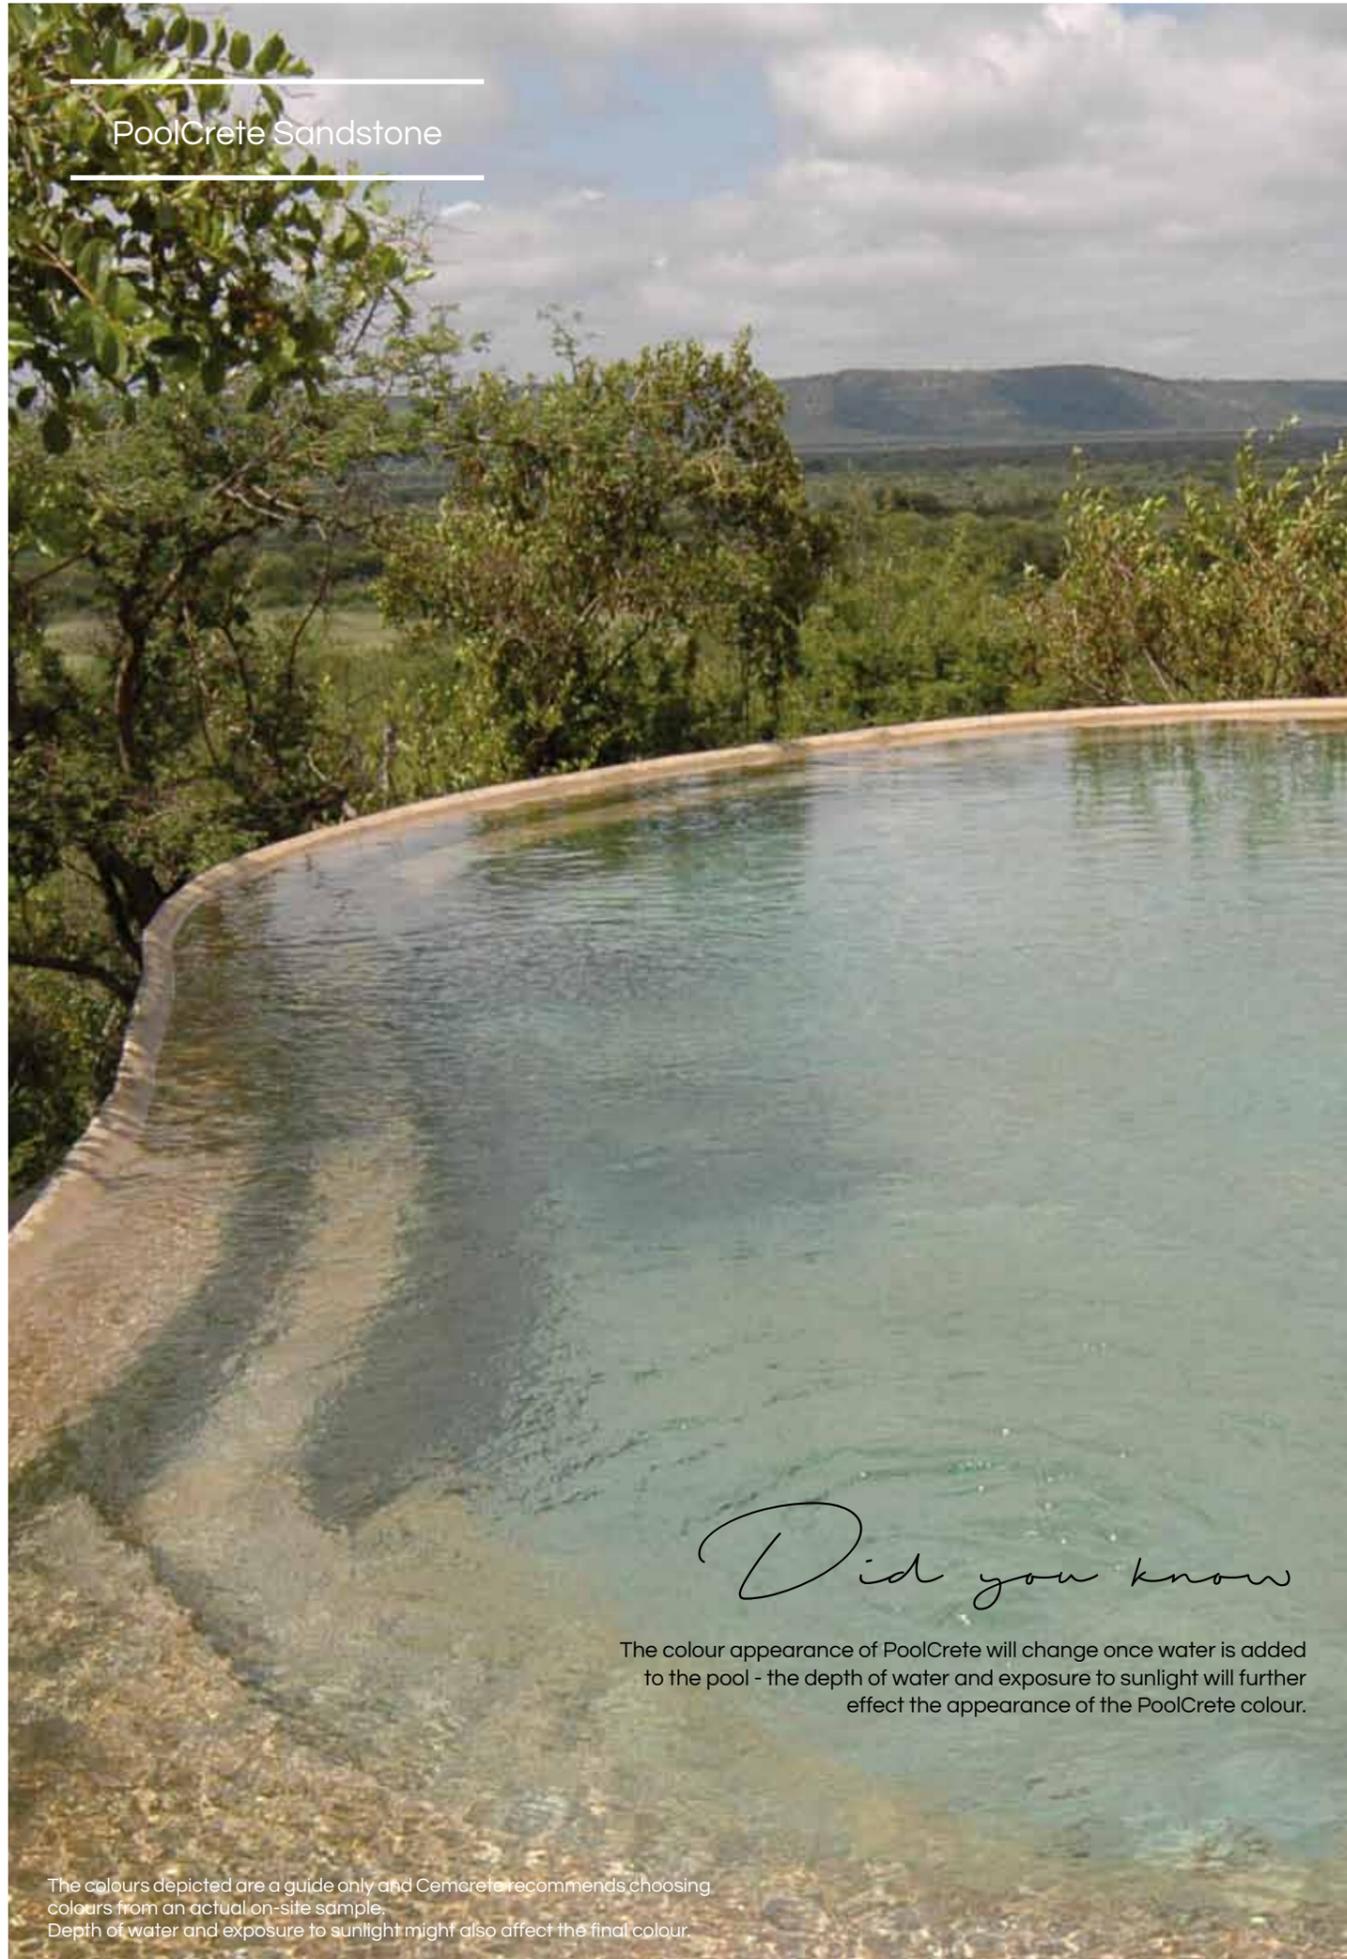

PoolCrete Superior White



PoolCrete Ocean Blue

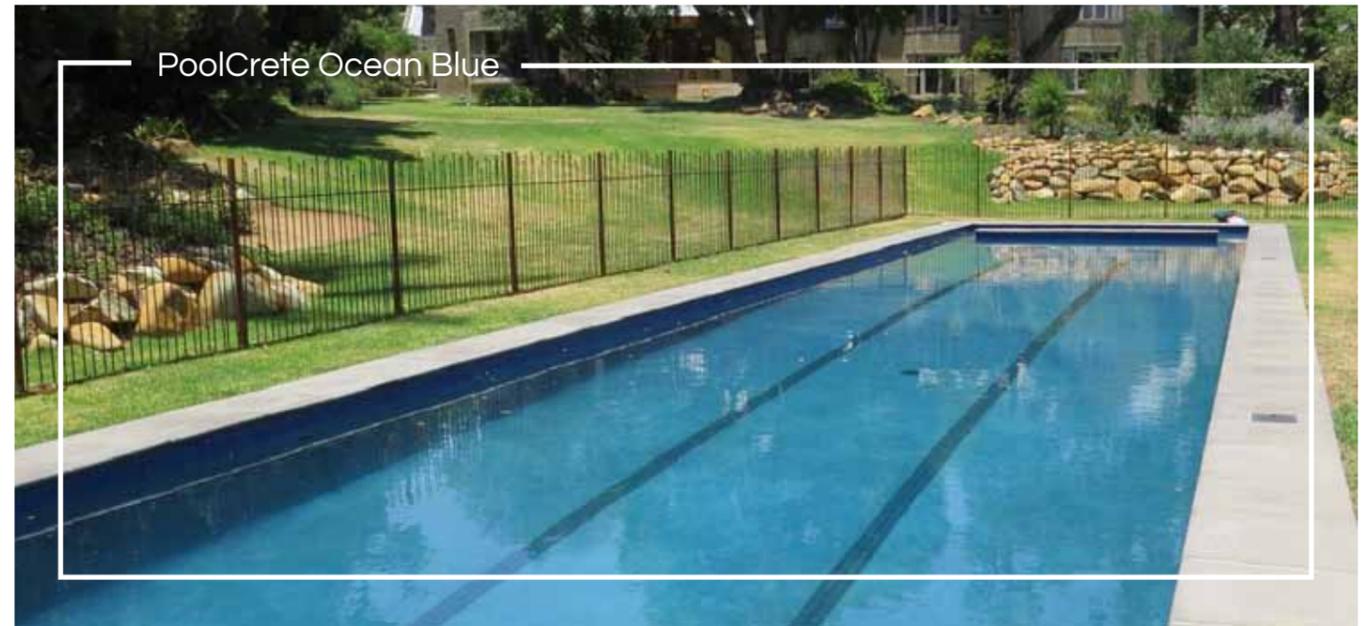



*Did you know*

The colour appearance of PoolCrete will change once water is added to the pool - the depth of water and exposure to sunlight will further effect the appearance of the PoolCrete colour.

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.

PoolCrete Turquoise



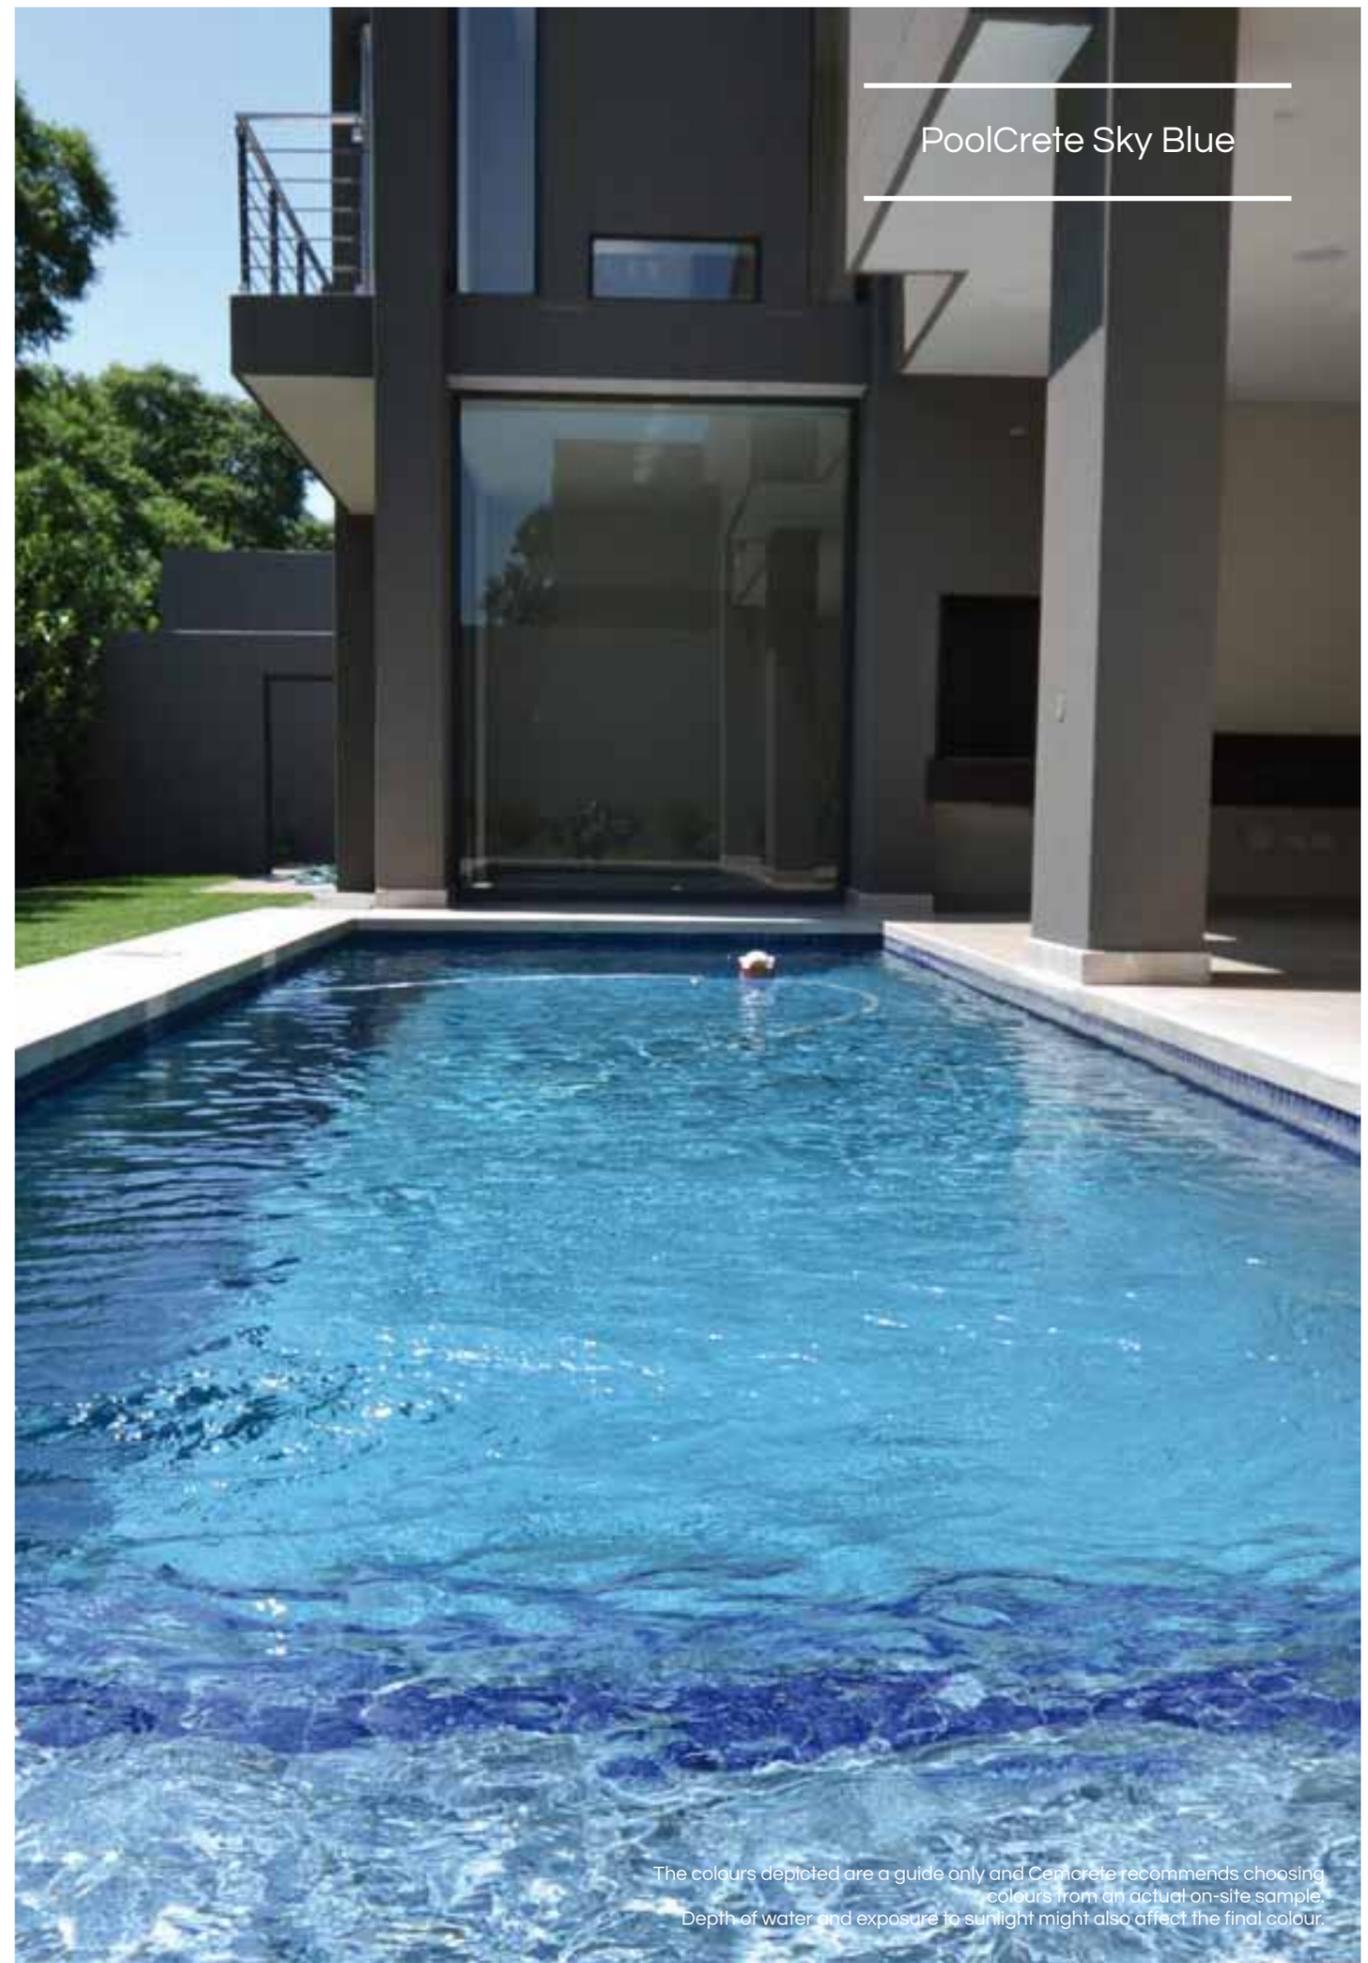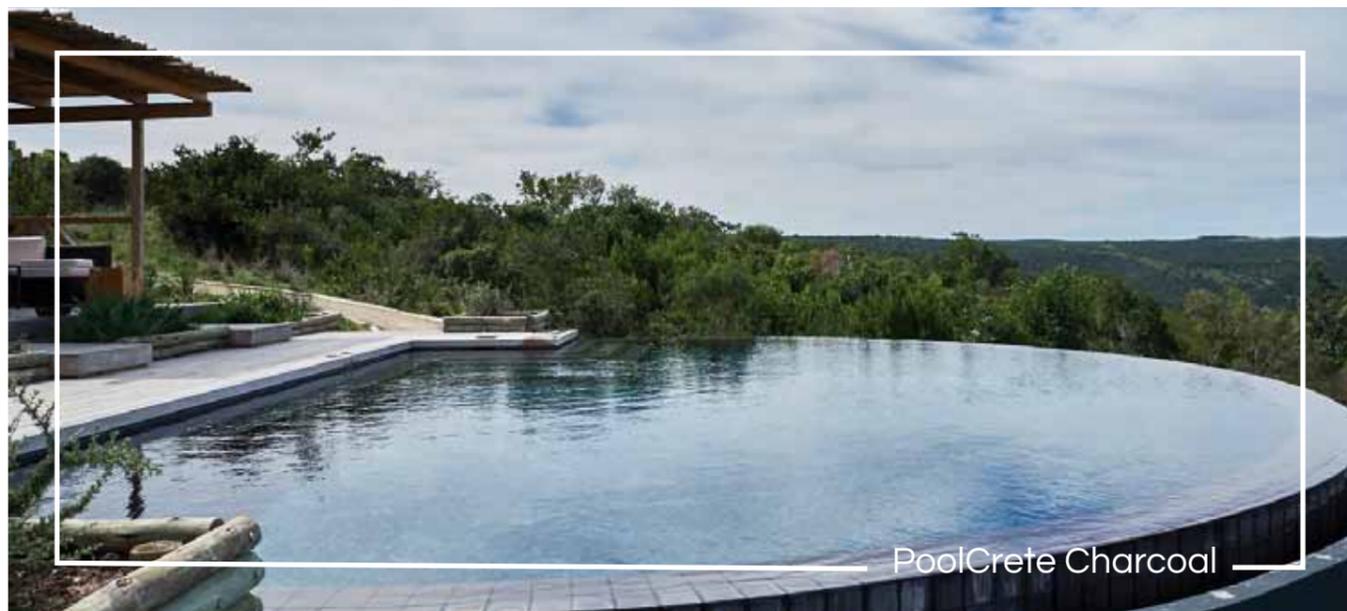

# POOL COATING

A cement-based coating which can be applied easily and quickly using a paint brush. Pool Coating is intended to revitalise your old, pitted, dirty pool plaster as an alternative to re-plastering. It must be noted that Pool Coating is a once-off application.




## BRUSH-ON CEMENT-BASED POOL PAINT

Pool Coating Blue

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.

*Did you know*


Pool Coating can only be applied to pools that have cured for at least 9 months.



White



Sandstone



Blue



Turquoise



Green



Charcoal

### BENEFITS

- Application with a brush and/or roller
- Economical & easy to apply
- Fresh finish to old surfaces
- Excellent bond, flexural and tensile strength
- Good abrasion and chemical resistance
- Becomes an integral part of the pool plaster

### SPECIFICATIONS

Suitable surfaces	Old, dirty pool plaster that has been acid-washed Not for application to oil paint, plastic paint, new cement surfaces, fibre glass or new pool plaster
Finish	Smooth - light brush/roller texture
Thickness	1.5mm
Application	Brush and/or roller
Packaging	15kg twin pack
Coverage	Approximately 25m <sup>2</sup> per 15kg twin pack
Curing	The completed work should be air cured for 6 days before filling the pool with water Any rain water that does fall during this period should be immediately removed from the pool. Allow an extra days air curing for each day of rain during the six day curing period Filling of pool - See Pool Coating Start-Up Guide
Colour/s	Available in 6 colours

### INTENDED FOR USE WITH

Acid wash

### TOOLS NEEDED

Block brush  
Wire-brush  
Brush and/or roller

### SUPPORTING CEMCRETE PRODUCTS

Pool Crack Filler  
Pool Sealer  
Pool Patching  
FlexBond

In warm/humid weather the product tends to thicken in the container which reduces the coverage achieved. To alleviate this problem, dilute FlexBond (dilute 1:4 with clean water) and add 100ml at a time to keep the mixed product to a paintable consistency.



# BEADCRETE

A unique glass beaded decorative pool plaster for use on reinforced concrete pool interiors. The pure glass beads in BeadCrete produce a reflective surface that enhances water sparkle.



## BENEFITS

- Cost competitive replacement for traditional exposed pebble finishes
- Modern – white and coloured surface aesthetic with coloured beads and reflective additives that enhance pool water appearance
- Strong and durable
- Smooth textured finish reduces risk of skin abrasion and gently massages under the feet
- Easily placed and finished by competent tradespersons
- Suitable for new concrete pools & renovations

## SPECIFICATIONS

Suitable surfaces	New or renovated reinforced concrete pool interiors
Finish	Smooth surface
Thickness	8mm
Application	Steel trowel
Packaging	20kg bag
Coverage	Approximately 0.9m <sup>2</sup> per 20kg bag
Curing	Commence filling the pool from the deep end on the day of application. Damp down exposed BeadCrete every hour to prevent premature drying Filling of pool - See BeadCrete Start-Up Guide
Colour/s	Available in 5 colours

## INTENDED FOR USE WITH

PoolCrete Primer  
FlexBond

## TOOLS NEEDED

Block brush  
Wire-brush  
Brush and/or roller  
Steel trowel  
Sponge float  
High pressure washer

## SUPPORTING CEMCRETE PRODUCTS

Pool Crack Filler  
Pool Sealer  
Pool Patching



# UNIQUE POOL PLASTER CONTAINING GLASS BEADS


BeadCrete Le Meridian Flash

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.


## BEADCRETE | COLOURS




Maldives Flash

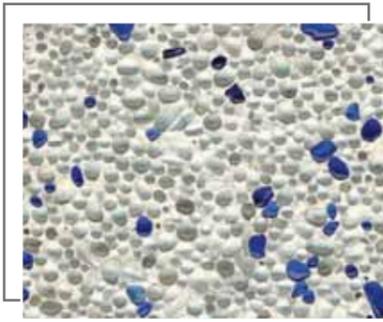

Maldives

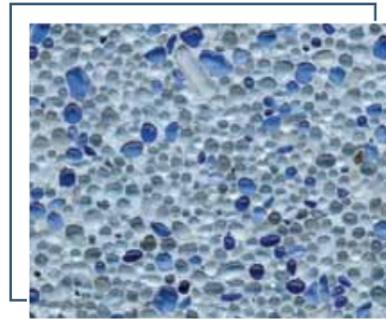

Le Meridian Flash

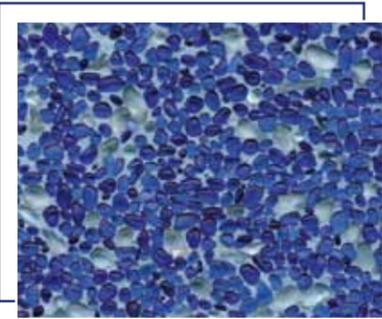

Le Meridian



Bora Bora

## BEADCRETE | USES

BeadCrete Maldives Flash



The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.



BeadCrete Maldives Flash

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.

# POOL PATCHING



## Underwater patching of plaster pools

A quick-setting compound having a base of white cement and white marble, specially formulated to enable it to be taken underwater without disintegrating and later becomes rock hard.

### BENEFITS

- To enable the underwater patching of small holes in marble pool plaster pools
- Setting time of 5 minutes

### SPECIFICATIONS

Suitable surfaces	Plaster pools
Finish	Smooth
Thickness	N/A
Application	Small rounded trowel
Packaging	1 & 5kg container
Coverage	1kg covers 200m <sup>2</sup>
Curing	Normal setting time approximately 5 minutes - do not disturb for 24 hours
Colour/s	Available in white only - PoolCrete colours available on order

# POOL SEALER

## Liquid sealer for treating pool leaks

An inexpensive sealer for treating leaking pools where seepage is through general porosity or thinness of the plaster.

### BENEFITS

- Inexpensive sealer
- No need to empty your pool

### SPECIFICATIONS


Suitable surfaces	Leaking pools where seepage is through general porosity or thinness of the plaster
Finish	N/A
Thickness	N/A
Application	Add to water of pool
Packaging	5 & 20 litre containers
Coverage	20 litres / 60 000 litre pool
Curing	10 days to see if treatment is effective
Colour/s	N/A



# POOL CRACK FILLER

## Fibre-reinforced flexible past crack filler

A heavily fibre-reinforced flexible paste which, after being allowed to dry, remains flexible under water. Requires the pool to be emptied and all cracks to be hacked open.

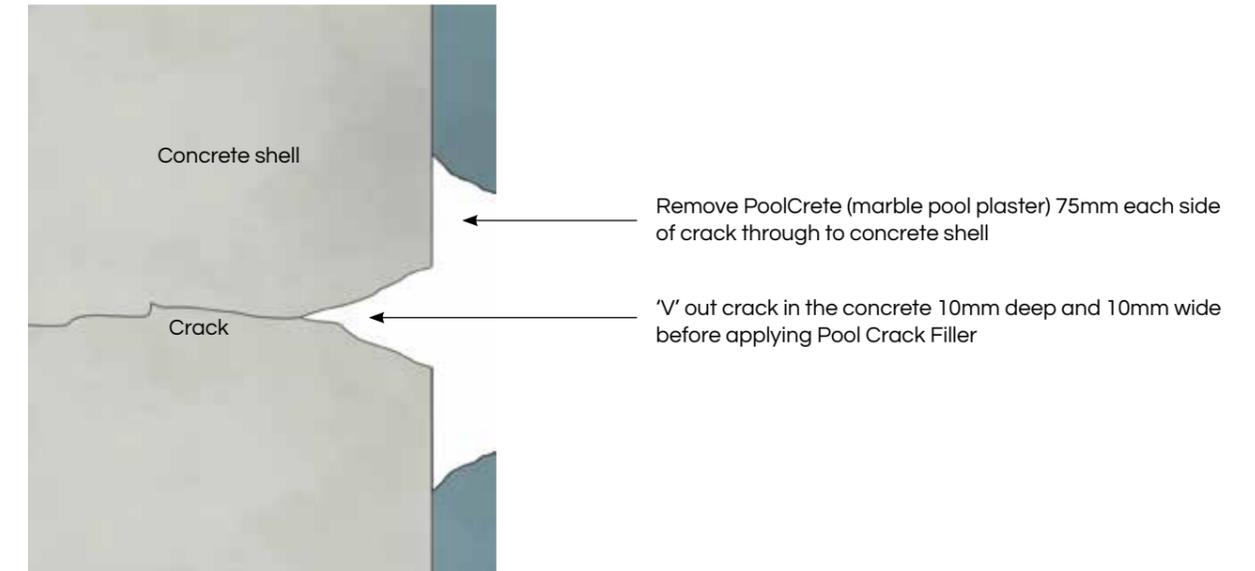

### BENEFITS

- To provide a knifing grade filler for cracks in water containing structures
- Remains flexible under water
- Supplied in paste form
- Pool Crack Filler is elastomeric (polymer that displays rubberlike elasticity) which is helpful in structures that show movement
- Cement-based coatings and marble pool plaster bond well to Pool Crack Filler
- Can be used as a crack filler for floors and walls

### SPECIFICATIONS

Suitable surfaces	Concrete or gunite pools, will not adhere to fibre glass or plastic
Finish	N/A
Thickness	Remove marble pool plaster 75mm each side of crack through to concrete V out crack in the concrete 10mm deep and 10mm wide
Application	Knife
Packaging	1 & 5kg containers
Coverage	Depends on the width and depth of the joint 6.6 linear meter per 1kg & 33 linear meter per 5kg
Curing	Allow filler to air cure for 2 days
Colour/s	Available in grey only

### INTENDED FOR USE WITH

Pool Crack Filler Primer  
PoolCrete

0860 CEMCRETE  
info@cemcrete.co.za  
www.cemcrete.co.za



#### HEAD OFFICE

---

##### Showroom & Warehouse

8 Telford Street  
Industria  
(011) 474 2415  
info@cemcrete.co.za

#### GAUTENG

---

##### Johannesburg Showroom

227 Jan Smuts Avenue  
Parktown North  
(011) 447 3149  
jsa@cemcrete.co.za

##### Centurion Showroom & Warehouse

15 Coachmen's Park  
26 Jakaranda Street  
Centurion  
(012) 653 6808  
pretoria@cemcrete.co.za

#### CAPE TOWN

---

##### Showroom & Warehouse

Unit 3 Eagle Park  
chr Bosmansdam & Omuramba Roads  
Montague Gardens  
(021) 555 1034  
cape@cemcrete.co.za

We have distributors nationally as well as across many African countries and internationally. Contact us to locate your nearest retailer or contractor.



Manufacturers of Distinctive Decorative Coatings



On the cover:  
PoolCrete Silver Grey

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.

Creating distinctive cement finishes  
as *unique* as you are.