

ICEMCRETE®

Manufacturers of Distinctive Decorative Coatings



POOL REPAIR PRODUCTS

Pool Patching, Pool Sealer & Pool Crack Filler

POOL PATCHING

Underwater patching of plaster pools

A quick-setting compound having a base of white cement and white marble, specially formulated to enable it to be taken underwater without disintegrating, and later becomes rock hard.

BENEFITS

- To enable the underwater patching of small holes in marble pool plaster pools
- Setting time of 5 minutes

SPECIFICATIONS

Suitable surfaces	Plaster pools
Finish	Smooth
Thickness	N/A
Application	Small rounded trowel
Packaging	1 & 5kg containers
Coverage	200mm x 200mm Coverage requires 1kg or 1.5m ² /40kg
Curing	Normal setting time approximately 5minutes - do not disturb for 24 hours
Colour/s	Available in white only - PoolCrete colours available on order



POOL SEALER

Liquid sealer for treating pool leaks

An inexpensive sealer for treating leaking pools where seepage is through general porosity or thinness of the plaster.

BENEFITS

- Inexpensive sealer
- No need to empty your pool

SPECIFICATIONS

Suitable surfaces	Leaking pools where seepage is through general porosity or thinness of the plaster
Finish	N/A
Thickness	N/A
Application	Add to water of pool
Packaging	5 & 20 litre containers
Coverage	20 litres / 60 000 litre pool
Curing	10 days to see if treatment is effective
Colour/s	N/A



POOL CRACK FILLER

Fibre-reinforced flexible past crack filler

A heavily fibre-reinforced flexible paste which, after being allowed to dry, remains flexible under water. Requires the pool to be emptied and all cracks to be hacked open.

BENEFITS


- To provide a knifing grade filler for cracks in water containing structures
- Remains flexible under water
- Supplied in paste form
- Pool Crack Filler is elastomeric (polymer that displays rubberlike elasticity) which is helpful in structures that show movement
- Cement-based coatings and marble pool plaster bond well to Pool Crack Filler
- Can be used as a crack filler for floors and walls

SPECIFICATIONS

Suitable surfaces	Concrete or gunite pools. Will not adhere to fibreglass or plastic
Finish	N/A
Thickness	Remove marble pool plaster 75 mm each side of crack through to concrete V out crack in the concrete 10 mm deep and 10 mm wide
Application	Knife
Packaging	1 & 5kg containers
Coverage	Depends on the width and depth of the joint 6.6 linear meter per 1kg & 33 linear meter per 5kg
Curing	Allow filler to air cure for 2 days
Colour/s	Available in grey only

INTENDED FOR USE WITH

Pool Crack Filler Primer
PoolCrete

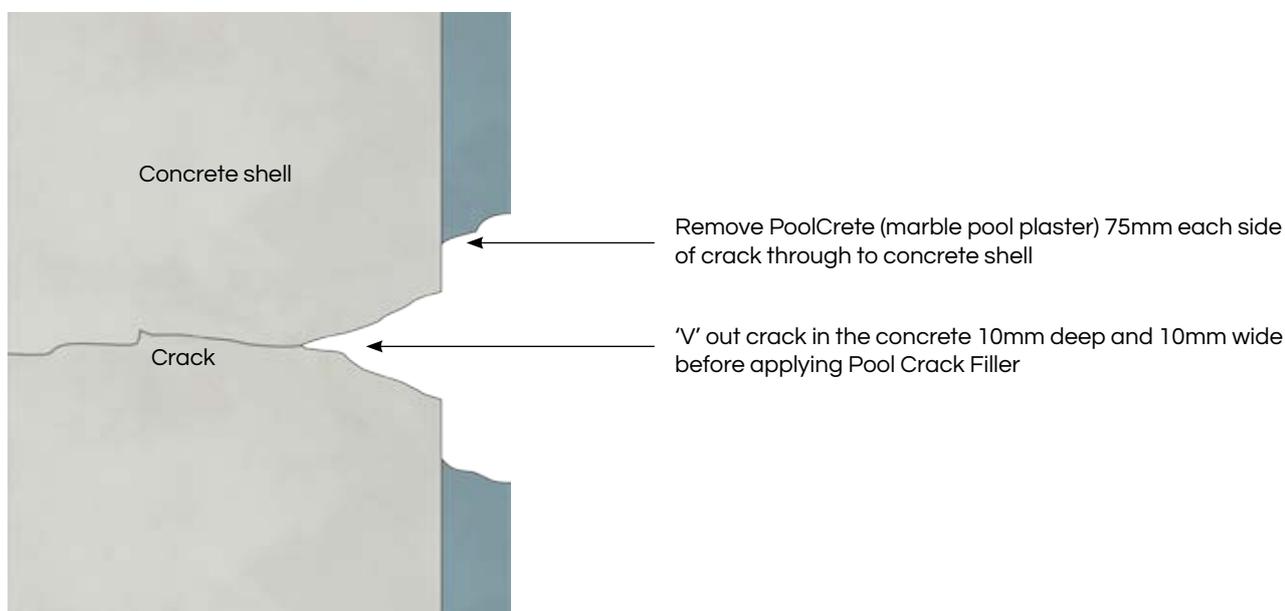

0860 CEMCRETE | info@cemcrete.co.za | www.cemcrete.co.za | [f](#) [i](#) [p](#) [in](#) [yt](#)

We have distributors nationally as well as across many African countries and internationally. Contact us to locate your nearest retailer or contractor.