

# POOL REPAIR PRODUCTS

Pool Patching, Pool Sealer & Pool Crack Filler



Creating distinctive cement finishes  
as *unique* as you are.

**ICEMCRETE®**

Manufacturers of Distinctive Decorative Coatings



## POOL PATCHING

Underwater patching of holes in plaster pools

A quick-setting compound having a base of white cement and white marble, specially formulated to enable it to be taken underwater without disintegrating, and later becomes rock hard.

### Benefits

- To enable the underwater patching of small holes in marble pool plaster pools
- Setting time of 5 minutes

#### Specifications

Suitable Surfaces	Plaster pools
Finish	Smooth
Thickness	N/A
Application	Small rounded trowel
Packaging	1 & 5kg plastic drums
Coverage	200 x 200mm requires 1kg or 1.5m <sup>2</sup> per 40kg
Curing	Normal setting time approximately 5minutes - do not disturb for 24 hours
Colour/s	Available in white only - PoolCrete colours available on order

## POOL SEALER

Liquid sealer for treating leaking pools

An inexpensive sealer for treating leaking pools where seepage is through general porosity or thinness of the plaster.

### Benefits

- Inexpensive sealer
- No need to empty your pool

#### Specifications


Suitable Surfaces	Leaking pools where seepage is through general porosity or thinness of the plaster
Finish	N/A
Thickness	N/A
Application	Add to water of pool
Packaging	5 & 25L drums
Coverage	25 litres/75 000 litre pool
Curing	10 days to see if treatment is effective
Colour/s	N/A



## POOL CRACK FILLER

Fibre-reinforced flexible paste crack filler

A heavily fibre-reinforced flexible paste which, after being allowed to dry, remains flexible under water. Requires the pool to be emptied and all cracks to be hacked open.

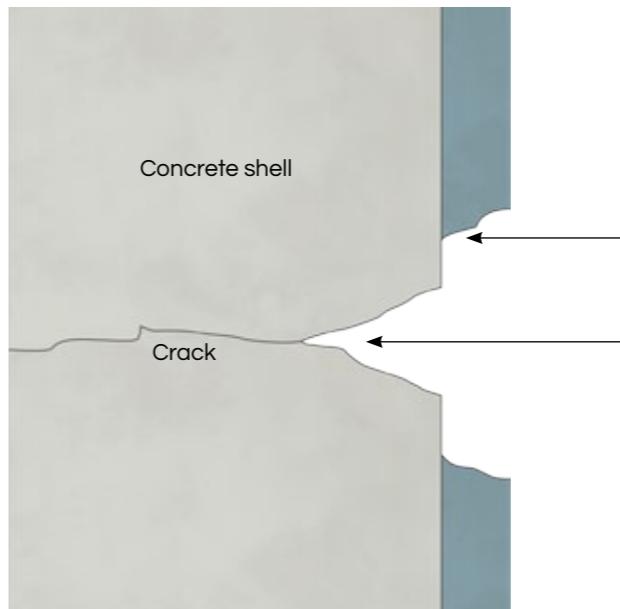

Remove PoolCrete (marble pool plaster) 75mm each side of crack through to concrete shell

'V' out crack in the concrete 10mm deep and 10mm wide before applying Pool Crack Filler

### Benefits

- To provide a knifing grade filler for cracks in water containing structures
- Remains flexible under water
- Supplied in paste form
- Pool Crack Filler is elastomeric (Polymer that displays rubberlike elasticity) which is helpful in structures that show movement
- Cement-based coatings and marble pool plaster bond well to Pool Crack Filler
- Can be used as a crack filler for floors and walls

#### Specifications

Suitable Surfaces	Concrete or gunite pools. Will not adhere to fibreglass or plastic.
Finish	N/A
Thickness	Remove marble pool plaster 75 mm each side of crack through to concrete. V out crack in the concrete 10 mm deep and 10 mm wide.
Application	Knife
Packaging	1 & 5L drums
Coverage	Depends on the width and depth of joint. Average 5m <sup>2</sup> per kg.
Curing	Allow filler to air cure for two days
Colour/s	Available in grey only

#### Intended for use with

Pool Crack Filler Primer 20kg bags - 1m<sup>2</sup> per kg mixed slurry  
PoolCrete 40kg bags - Approximately 2m<sup>2</sup> per bag

**0860 CEMCRETE**  
[info@cemcrete.co.za](mailto:info@cemcrete.co.za)  
[www.cemcrete.co.za](http://www.cemcrete.co.za)



## HEAD OFFICE

---

Showroom & Warehouse  
8 Telford Street  
Industria  
(011) 474 2415  
[info@cemcrete.co.za](mailto:info@cemcrete.co.za)

## GAUTENG

---

Johannesburg Showroom  
227 Jan Smuts Avenue  
Parktown North  
(011) 447 3149  
[jsa@cemcrete.co.za](mailto:jsa@cemcrete.co.za)

Centurion Showroom & Warehouse  
15 Coachmen's Park  
26 Jakaranda Street  
Centurion  
(012) 653 6808  
[pretoria@cemcrete.co.za](mailto:pretoria@cemcrete.co.za)


## CAPE TOWN

---

Showroom & Warehouse  
Unit 3 Eagle Park  
cnr Bosmansdam & Omuramba Roads  
Montague Gardens  
(021) 555 1034  
[cape@cemcrete.co.za](mailto:cape@cemcrete.co.za)

We have distributors nationally, in most African countries and internationally. Contact us to locate your nearest stockist or contractor.

**C  
E  
M  
C  
R  
E  
T  
E**<sup>®</sup>  
Manufacturers of Distinctive Decorative Coatings

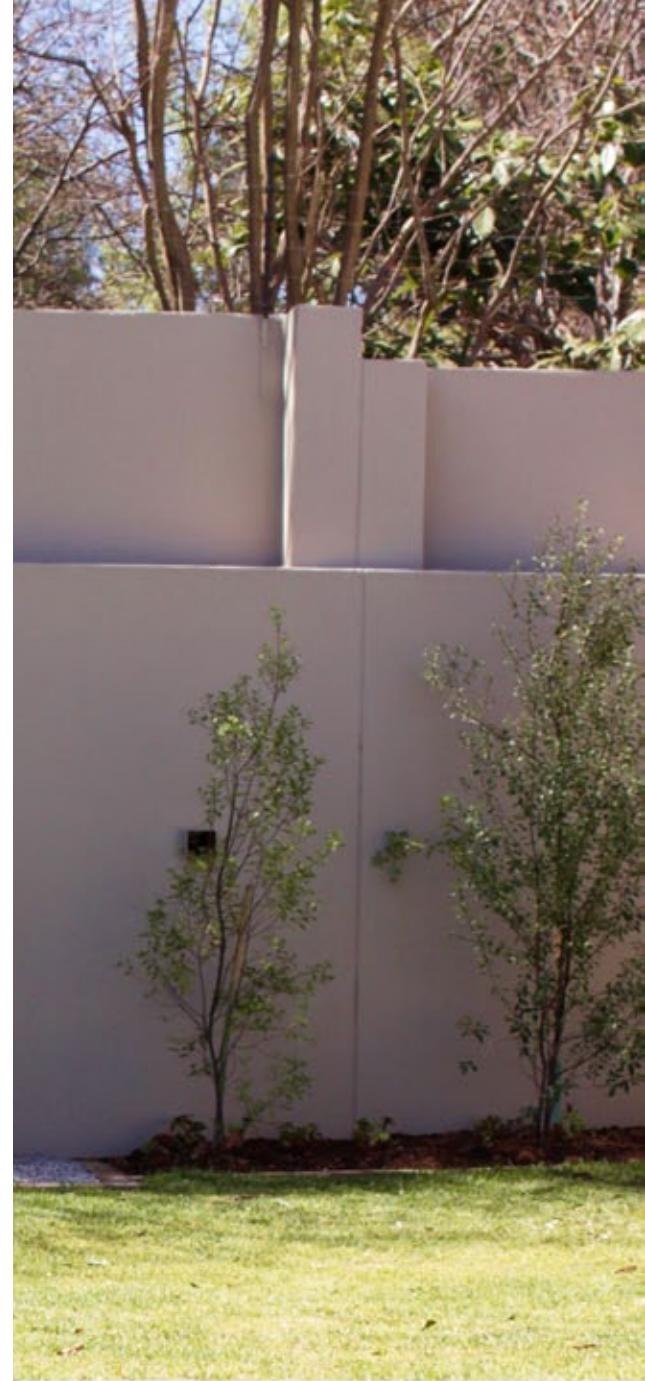

On the cover:  
Pool Sealer

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Depth of water and exposure to sunlight might also affect the final colour.