


ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

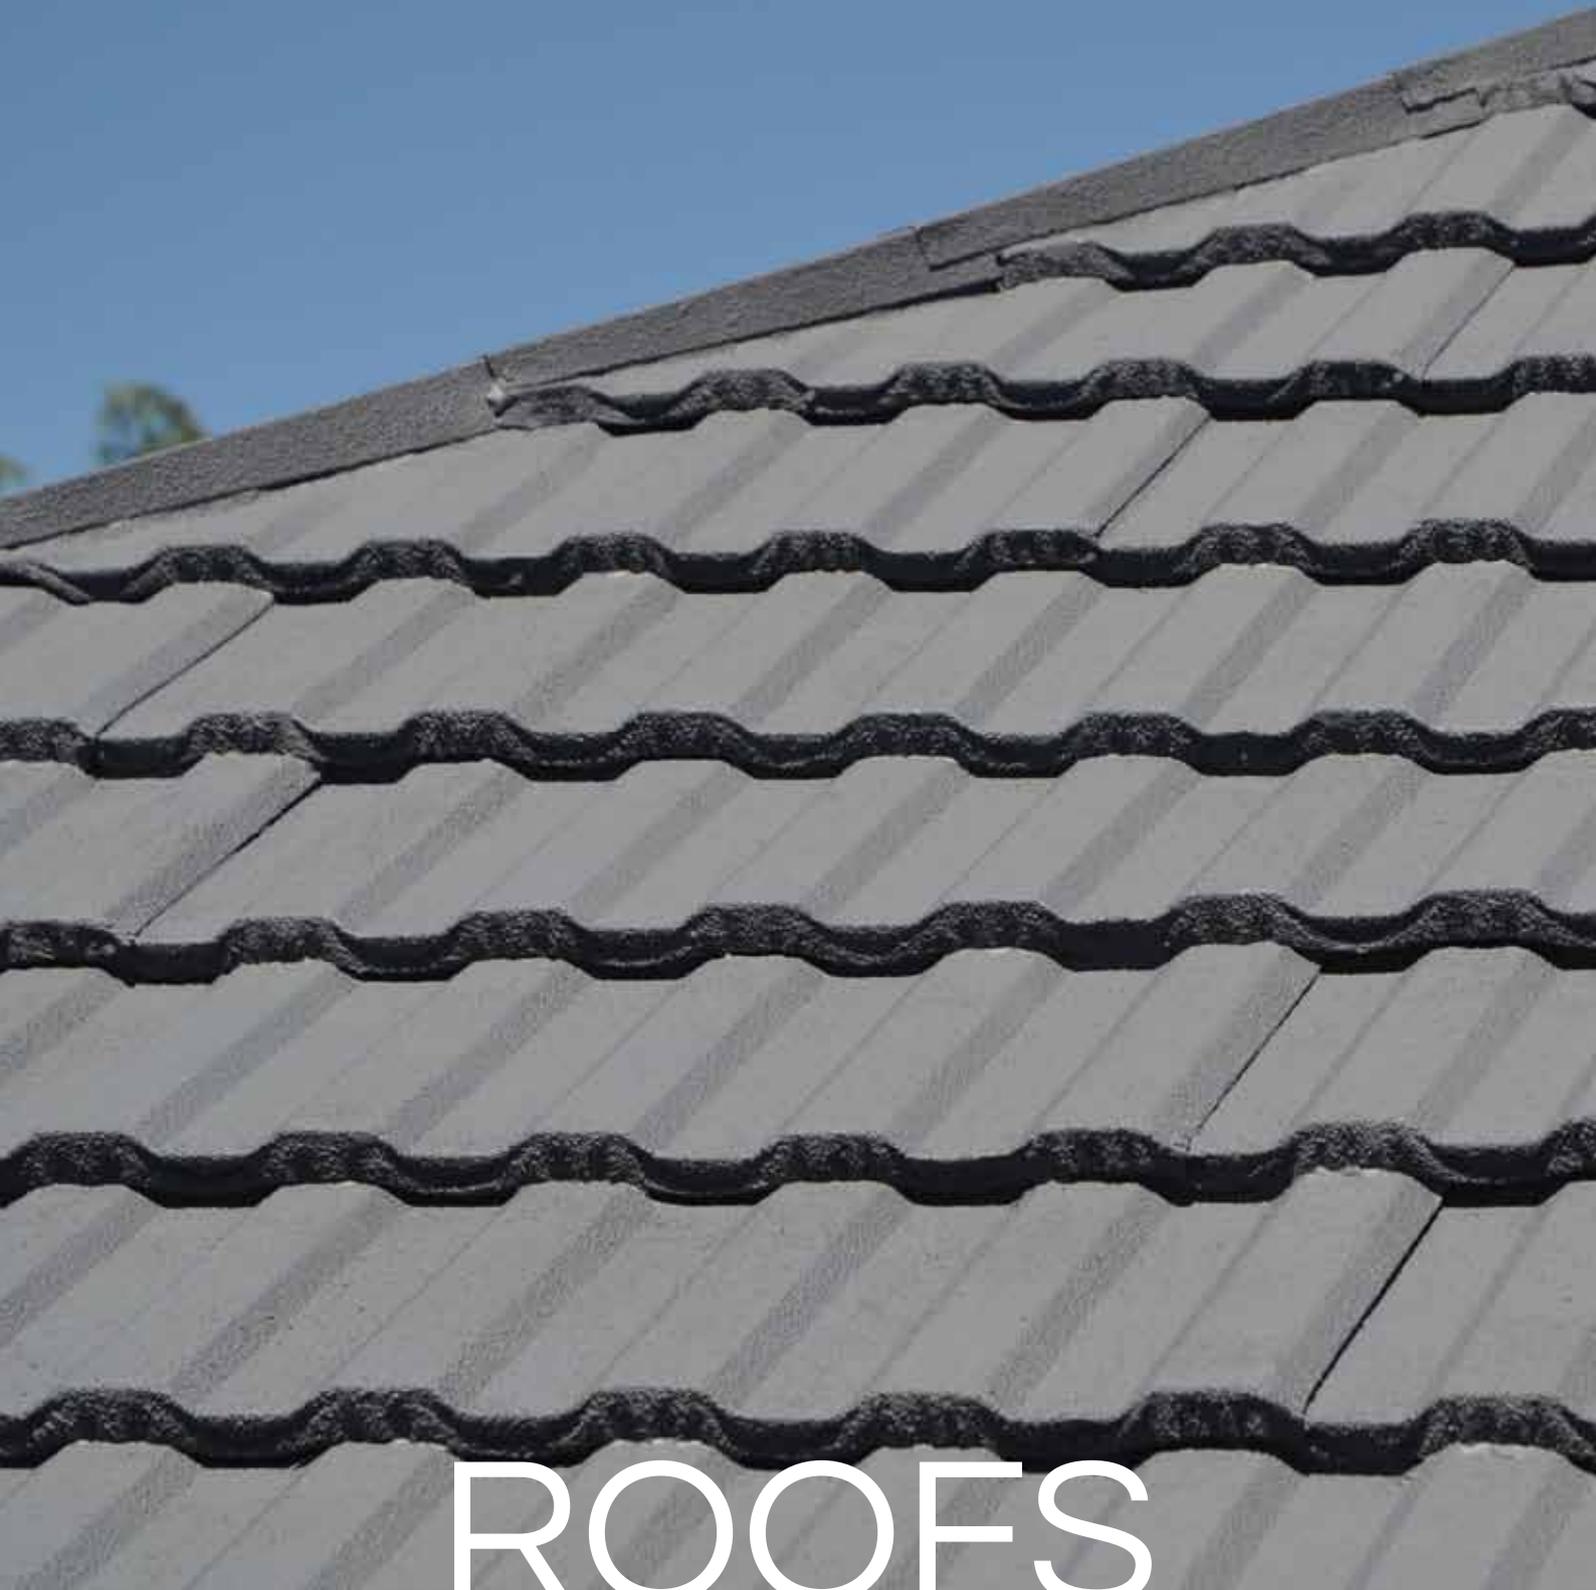

ROOFS

Products for roof repairs & finishings

ROOFSEAL

Membrane system for waterproofing roofs

To provide an extremely durable, easy-to-apply membrane system for concrete roofs, fibre cement and cement tiles. Although essentially a roof paint, it also has other applications such as side cladding, previously painted galvanized roofs, parapet walls and the sealing of roof/gutter bolts.

BENEFITS

- Waterproof, very durable and UV light resistant
- Easy-to-apply waterproof membrane system for concrete roofs



White



Straw



Concrete Grey



Terracotta



Green



Charcoal

SPECIFICATIONS

Suitable Surfaces	Concrete, bituminous felt, timber, galvanized iron, asbestos cement and foam cement
Finish	Smooth matt finish
Thickness	When used with the membrane 3mm per coat
Application	Brush-on
Packaging	1, 5 & 20 litre containers
Coverage	0.5m ² / litre for full application of 3 coats
Curing	Allow the polyester/RoofSeal sandwich to dry out for 3 or 4 days, depending on the weather, and apply a final finishing coat of RoofSeal
Colour/s	Available in 6 colours

INTENDED FOR USE WITH

RoofSeal Acrylic Primer	1, 5 & 20 litre containers - 5m ² / litre
Polyester membrane	1m wide, up to 150mm in length

TOOLS NEEDED

Brush
Roller
Broom

0860 CEMCRETE | info@cemcrete.co.za | www.cemcrete.co.za | [f](#) [i](#) [p](#) [in](#) [t](#) [v](#)

We have distributors nationally as well as across many African countries and internationally. Contact us to locate your nearest retailer or contractor.

THATCHCRETE

Cement lining for thatch roofs


For creating a thin, reinforced, waterproof, fire resistant, cement lining to be applied directly onto the exterior of an old or new grass thatched roof. This lining is tough enough to resist mammals like baboons, vervet monkeys as well as birds from causing damage to the roof or entering the building.

BENEFITS


- Applied directly onto the exterior of an old or new grass thatched roof
- Not only waterproofing, but resistant to fire, baboons, monkeys and birds



Grey



Brown



Charcoal

SPECIFICATIONS

Suitable Surfaces	Exterior of an old or new grass thatched roof
Finish	Textured finish
Thickness	Approximately 4mm
Application	Brush-on
Packaging	40kg bags
Coverage	5m ² per 40kg bag depending on thickness of final work
Curing	Allow finished ThatchCrete work to air cure for 5 days
Colour/s	Available in 3 colours. Can also be coated with CemWash which is available in 18 colours

INTENDED FOR USE WITH

CreteBond	1, 5 & 20 litre containers – 2 litres per 40kg bag of ThatchCrete
CemForce	1m width, any length - allow 10% for overlapping on joints
Optional final coating: CemWash	25kg bags - Approximately 24 - 30m ² / 25kg bag

TOOLS NEEDED

Block brush

0860 CEMCRETE | info@cemcrete.co.za | www.cemcrete.co.za | [f](#) [i](#) [p](#) [in](#) [t](#) [v](#)

We have distributors nationally as well as across many African countries and internationally. Contact us to locate your nearest retailer or contractor.

TPC ROOF

Durable colourful coating for roofs

A tough, thermoplastic, textured, weatherproof coating. Contains Mica and Silica for maximum film protection against ultra-violet light and weather abrasion.

BENEFITS

- Holds well over fine crazing to prevent water entering the structure
- Supplied ready to use
- Weatherproof as it will re-emulsify under ponding
- UV stable
- Extremely durable & flexible

SPECIFICATIONS

Suitable Surfaces	Concrete and corrugated iron roofs
Finish	Slightly textured
Thickness	Approximately 60 microns per coat; the Mica chips protrude higher
Application	Paint or spray-on
Packaging	5 & 20 litre containers
Coverage	Approximately 3 - 6m ² / litre/ coat
Curing	Two coat application with a minimum six hour interval between coats
Colour/s	Available in 16 colours

INTENDED FOR USE WITH










CemBond 1, 5 & 20 litre containers - 8m²/ litre for 2 coats
Bitumen Primer

TOOLS NEEDED

Brush
Sheepskin roller



TPC | COLOUR RANGE

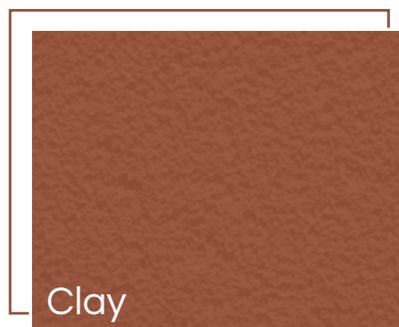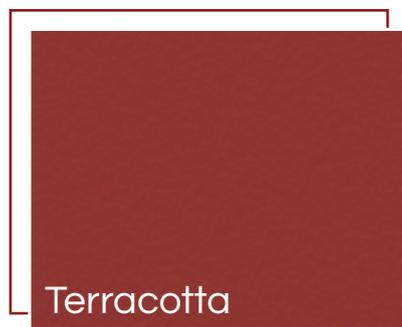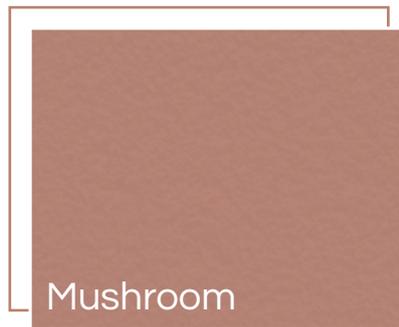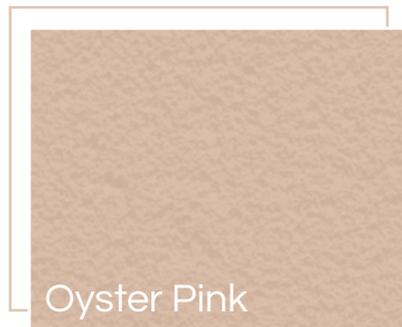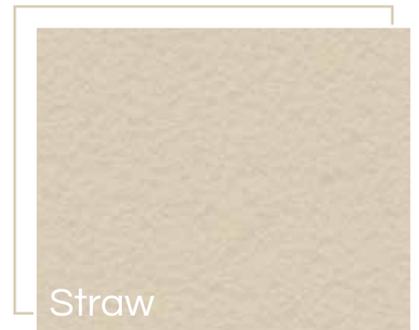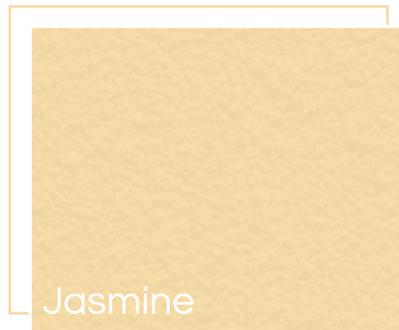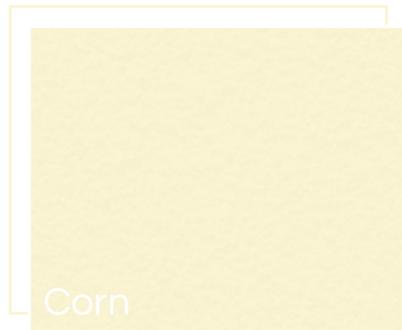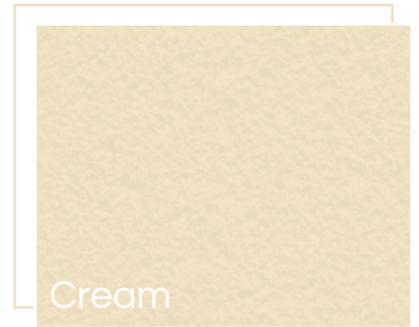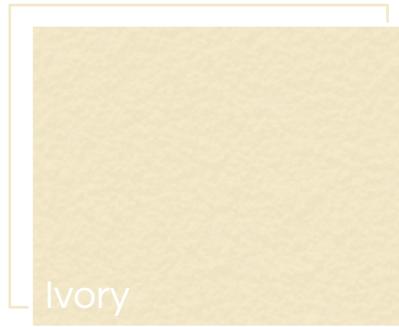

TPC | COLOUR RANGE

