

ICEMCRETE®

Manufacturers of Distinctive Decorative Coatings



COLOUR HARDENER

Dry-shake screed floor finish

A granolithic concrete material that is floated into fresh screed or concrete which colours, strengthens and creates durable surfaces for the concrete floors. It is a special blend of cement incorporating very hard-wearing aggregates, light fast pigments and additives which set rock-hard.

BENEFITS

- Can be used for interior & exterior floors
- Suitable for domestic or commercial projects
- Colours concrete to a depth of 2 - 3mm - No risk of colour being rubbed off or abraded
- Extremely durable (but is dependent on screed mix and curing)
- Can be used in conjunction with SuperScreed (10 - 20mm) where there are height restrictions
- Can be imprinted with patterns

SPECIFICATIONS

Suitable surfaces	Interior & exterior concrete or screed base
Finish	Steel trowelled to a smooth finish Textured, stamped or rolled to obtain different tiled or paved effects
Thickness	Depending on screed design - colour penetrates 2-3mm into screed
Application	Sprinkle-on & trowelled
Packaging	20kg bag
Coverage	Approximately 5m ² per 20kg bag
Curing	Leave to air cure for 1 day after completion Damp down with water twice daily for 7 days Allow to dry for a minimum of 14 days before sealing
Colour/s	Available in 15 colours













INTENDED FOR USE WITH

PrimerCote & FlexBond mix
SuperScreed
MultiPurpose Solvent-Based Sealer
Slip-Resistant Additive if required

YouTube tiny.cc/CH



COLOUR HARDENER | COLOUR RANGE

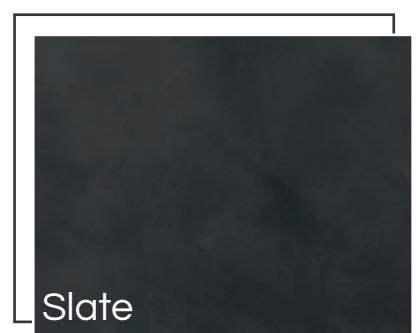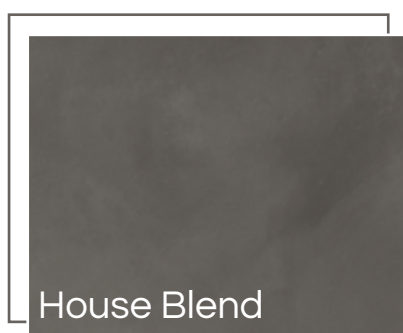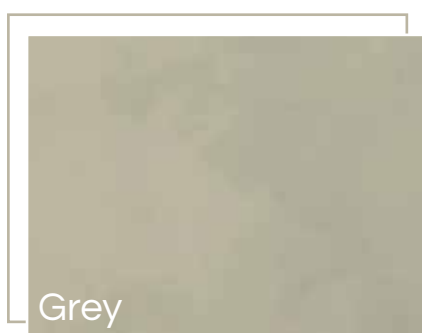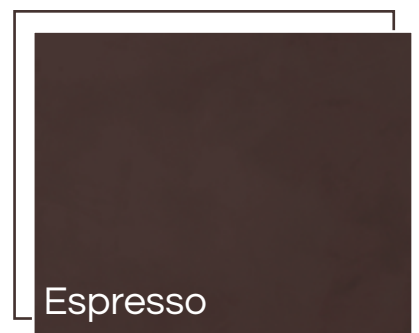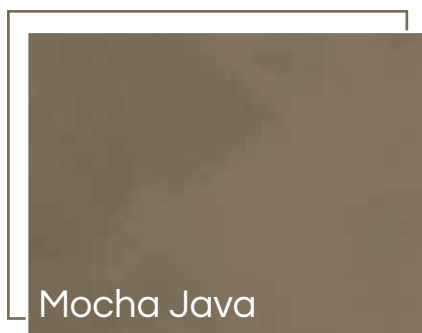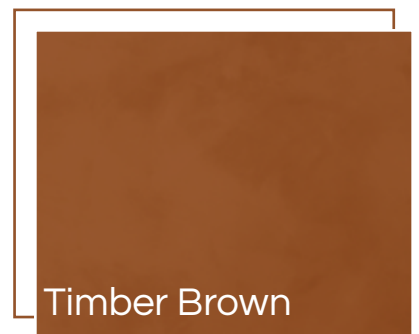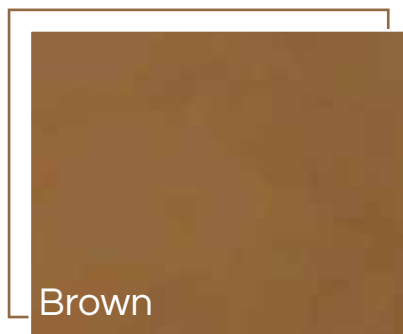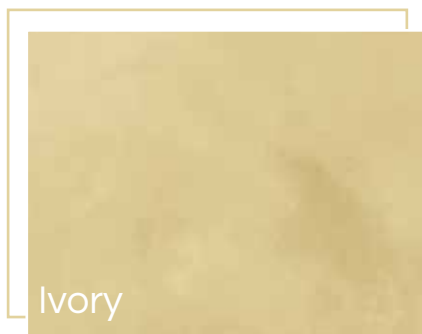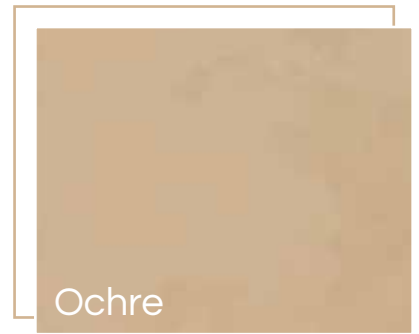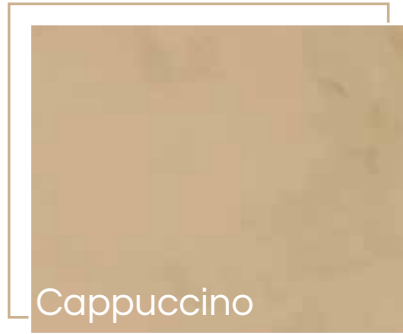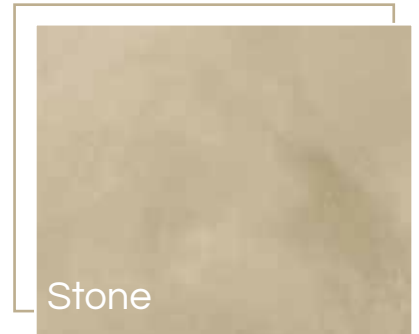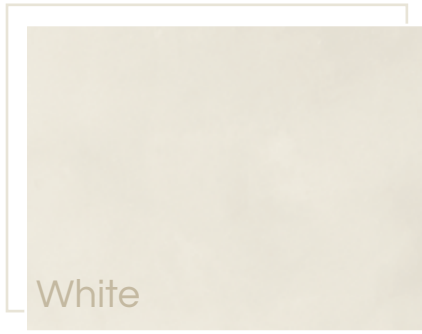

Did you know

Colour Hardener floors should be designed with expansion/control joints incorporated into them, which will minimize the risk of large unsightly cracks when subjected to large changes in temperature, soil or foundation movement etc. Panel sizes should be as symmetrical as is possible and should not exceed 9m².



Colour Hardener Stone

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.

COLOUR HARDENER | USES

Colour Hardener
House Blend
counter



Colour Hardener Grey floor panels in
various shapes and sizes



Colour Hardener White pool copings
and patio floor



Colour Hardener Chai Latte
imprinted with a wood texture

The colours depicted are a guide only and Cemcrete recommends choosing colours from an actual on-site sample. Different sealing methods might also affect the final colour.