

The logo for ICEMCRETE, featuring the word in a bold, red, italicized sans-serif font. The letter 'I' is black with a white diagonal stripe. A registered trademark symbol (®) is located at the top right of the word.

ICEMCRETE[®]

Manufacturers of Distinctive Decorative Coatings

A close-up photograph showing a cross-section of a concrete screed. The top layer is a smooth, reddish-brown finish. Below it is a dark, dense layer, and at the bottom is a layer of coarse aggregate (gravel) with a reddish-brown binder.

SUPERSCREED

Thin high-strength screed

A 10 - 20mm high-strength, shrinkage compensated granolithic type screed mix.

BENEFITS

- Can be used where height restrictions don't allow for a standard screed
- Can be used in conjunction with Colour Hardener to achieve a coloured cement floor finish
- Can be used for rectifying imperfections in floor surfaces
- To provide a suitable surface for micro coatings, CreteCote, tiles, carpets and wooden flooring
- Supplied in a single bag (cement component bagged separately in the same bag)

SPECIFICATIONS

Suitable surfaces	New and old concrete surfaces that are at least 28 days old Appropriate surface preparation is essential
Finish	Steel trowel to a smooth finish Textured, stamped or rolled to obtain different tiled or paved effects
Thickness	10 - 20mm
Application	Wood float or steel trowel
Packaging	40kg bags
Coverage	Approximately 0.9m ² when applied at 10mm thick
Curing	Cure the floor with a fine mist spray for the next 3 days to ensure limited water loss Final cure after 28 days
Colour/s	One colour only - Grey

INTENDED FOR USE WITH


PrimerCote & FlexBond mix

TOOLS NEEDED

Perforated stamper
Screed board
Wood float or plastic float
Steel trowel
Concrete edging tool and/or concrete jointing tool

SUPPORTING CEMCRETE PRODUCTS

Colour Hardener
CreteCote
CreteStain
RenoCrete

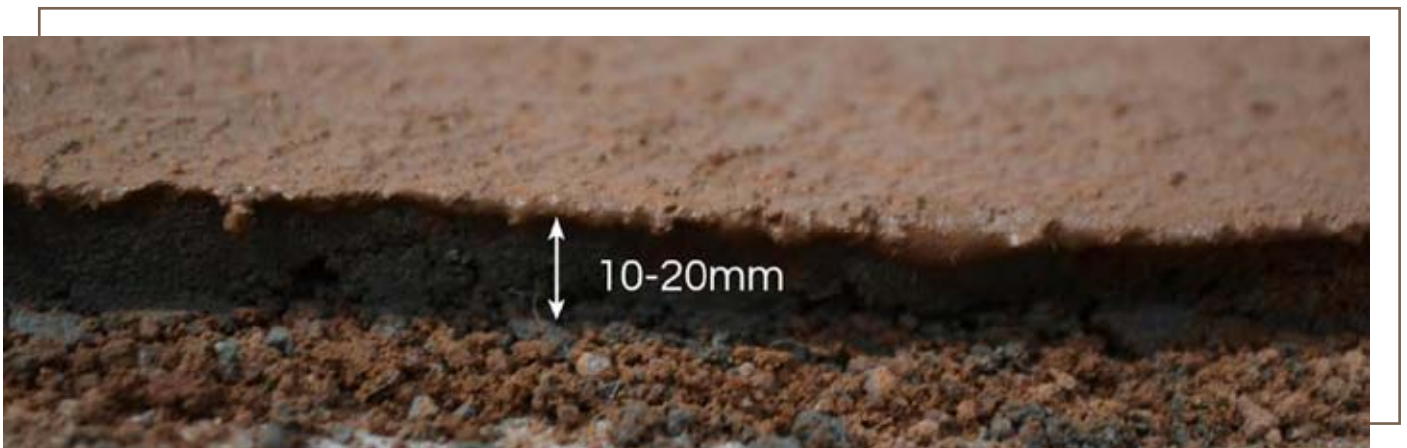

0860 CEMCRETE | info@cemcrete.co.za | www.cemcrete.co.za | [f](#) [i](#) [p](#) [in](#) [yt](#)

We have distributors nationally as well as across many African countries and internationally. Contact us to locate your nearest retailer or contractor.